



ELECTRIC
PROVECTION OVEN

IMPERIAL



MADE IN USA

PRVE-1

Model Numbers

PRVE-1

PRVE-2

PRVE-3

OVEN FEATURES

- All stainless steel exterior.
- 1/2 HP, 2 speed motor.
- Cool down feature.
- Two low watt density elements for long life.
- 7.5 KW output.
- Removable rack guide assembly.
- Five rack positions.
- Three oven racks included.
- Stainless steel oven door handle.
- Doors with tempered glass windows.
- Two HID oven interior lights with momentary switch.
- Full porcelain interior.
- Stackable up to three units high.
- Can be used as a base for countertop units or built-in as part of Spec and Pro Series ranges.
- Available in 208, 240 and 480 volts.
- Tested to UL197 threshold of 5mg/m3.

IMPERIAL


1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

©2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates



ELECTRIC

PROVECTION OVEN

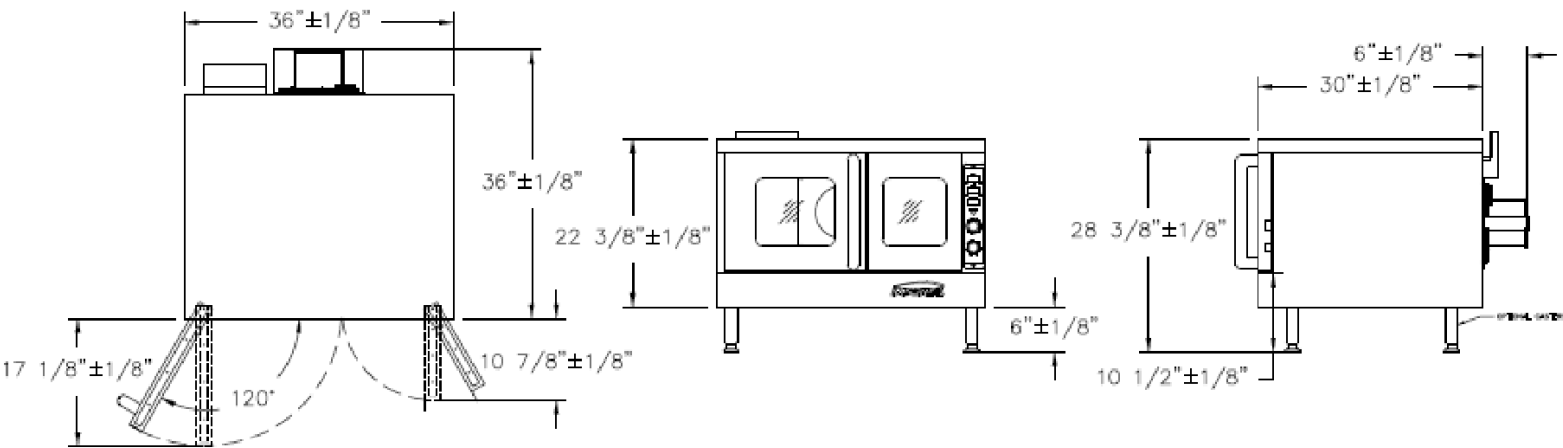

PROVECTION OVENS

MODEL	WIDTH INCHES (MM)	OUTPUT KW	SHIP WEIGHT	
			KG	LBS
PRVE-1	36" (914)	8.5	193	425
PRVE-2	36" (914)	8.5	386	850
PRVE-3	36" (914)	8.5	579	1275

MODEL	DIMENSIONS	CRATED DIMENSIONS
PRVE-1	36" W X 39" D X 21.5" H (914) W X (990) D X (546) H	39" W X 42" D X 24" H (990) W X (1069) D X (610) H
PRVE-2	36" W X 39" D X 43" H (914) W X (990) D X (1092) H	39" W X 42" D X 45" H (990) W X (1069) D X (1143) H
PRVE-3	36" W X 39" D X 64" H (914) W X (990) D X (1626) H	39" W X 42" D X 66" H (990) W X (1069) D X (1676) H

ELECTRICAL REQUIREMENTS PER OVEN				
TOTAL KW	VOLTS	PH	HERTZ	AMPS
8.0	208	1	50/60	39
	208	3	50/60	24
	240	1	50/60	34
	240	3	50/60	21
	480	3	50/60	11

CLEARANCE REQUIREMENTS

Legs or stand required for non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.

