



CORE SERIES - VSP

Gas Stockpot Ranges



Model VSP100

SPECIFIER STATEMENT

Core Series stockpot range, Vulcan model _____. Stainless steel front and sides with heavy cast iron top grate(s). Equipped with two concentric 55,000 BTU/hr ring-type burners per 18" section, providing 110,000 BTU/hr total input per section. Features a standing pilot ignition system, two infinite heat control valves per section, and a heat shield to protect control valves. Includes a 3/4" rear gas connection and gas pressure regulator. Backed by a one-year limited parts and labor warranty.

Exterior Dimensions:

18" wide x _____" deep x 22½" to 24" working height on adjustable legs

NOTE: Models are constructed standard for natural gas service. Propane conversion kits are available upon request.

CSA design certified. NSF listed.

SPECIFY GAS AND/OR ALTITUDE WHEN ORDERING

- ☐ Natural Gas for above 2,000 ft.
☐ Propane Gas for above 3,500 ft.



Project _____

AIA # _____ SIS # _____

Item # _____ Quantity _____ C.S.I. Section 114000

MODELS

- ☐ **VSP100** One section, 18" wide x 24.5" deep
☐ **VSP200F** Two sections, 18" wide x 49" deep

STANDARD FEATURES

- Stainless steel front and sides
- Heavy cast iron top grate(s)
- Two concentric 55,000 BTU/hr. ring-type burners per 18" section; 110,000 BTU/hr. input per section
- Standing pilot ignition system
- Two infinite heat control valves per section
- Heat shield to protect control valves
- 3/4" rear gas connection and gas pressure regulator
- One year limited parts and labor warranty





ACCESSORIES *(Packaged and Sold Separately)*

- ☐ CONVALTIKIT-SPP - Propane conversion kit

Approved by _____ Date _____ Approved by _____ Date _____



CORE SERIES - VSP STOCKPOT RANGES

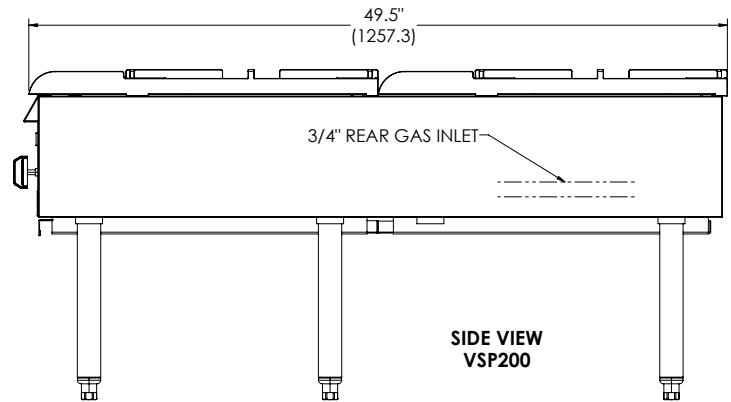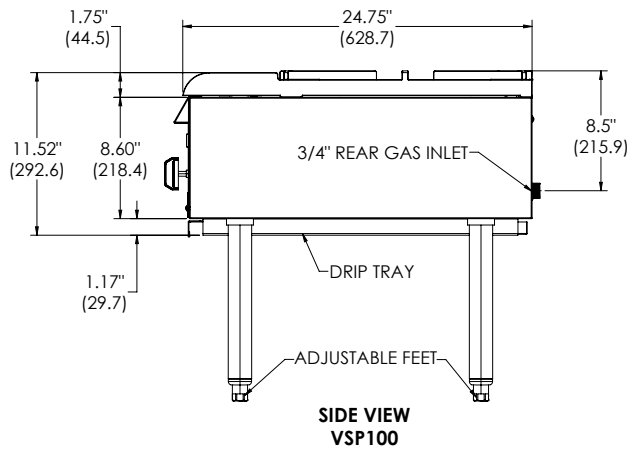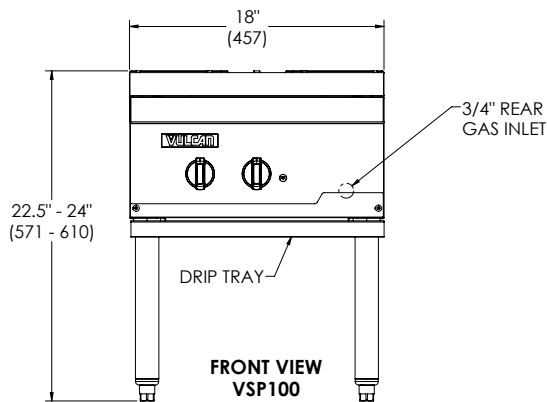

Gas Pressure

Natural Gas: 5.0" (127mm) W.C.
Propane Gas: 10.0" (254 mm) W.C.

A gas pressure regulator supplied with the unit must be installed.

Gas line connecting to appliance must be 3/4" diameter or larger.
If flexible connectors are used, the inside diameter must be the same as the 3/4" iron pipe.

Specify type of gas when ordering.

Specify altitude when above 2,000 feet.

Clearances

	Combustible	Non-Combustible
Rear	24"	4"
Right Side	18"	0"
Left Side	18"	0"

MODEL	TOTAL BTU/HR.	WIDTH	DEPTH	HEIGHT	APPROX. SHIP WT. (LB/KG)
VSP100	110,000	18"	24½"	22½" to 24"	145/66
VSP200F	220,000	18"	49"	22½" to 24"	290/131

This appliance is manufactured for commercial installation only and is not intended for home use.

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.