

50 LITRE INDIRECT GAS COOKER WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:



CODICE
CR1355989

MODELLO
D93/10PGI05S

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

AISI 304 stainless steel tanks with AISI 316 bottom.
Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.
Frontal drain by means of 2" chrome-plated brass faucet.
Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).
Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.
Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

Possibility of hot or cold water loading

Stainless steel tank with aisi 316 bottom

Indirect pans with automatic condensate drain valve

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

50 LITRE INDIRECT GAS COOKER WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:



CODICE
CR1355989

MODELLO
D93/10PGI05S

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1355989
DEFINITION	D93/10 PGI05 S PEN.GAS IND.M60 W/VAL 50L
COMMERCIAL LINE	DIAMANTE
NET WEIGHT	66,600 Kg
PACKAGE LENGTH	660,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1150,000 mm
PACKAGE VOLUME	0,774 m3
GROSS PACKING WEIGHT	79,000 Kg

50 LITRE INDIRECT GAS COOKER WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:


CODICE
CR1355989

MODELLO
D93/10PGI05S


SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

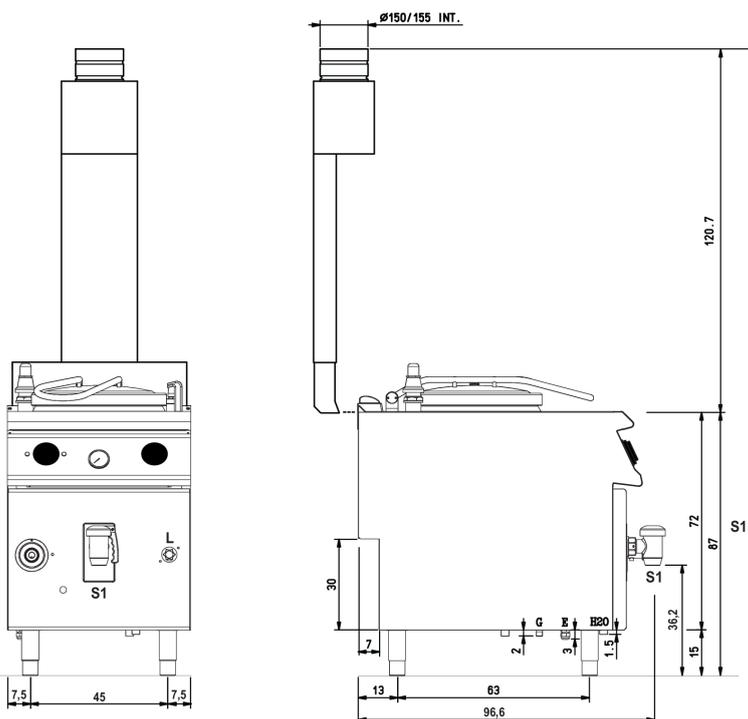

(D) 93/10 PGI05

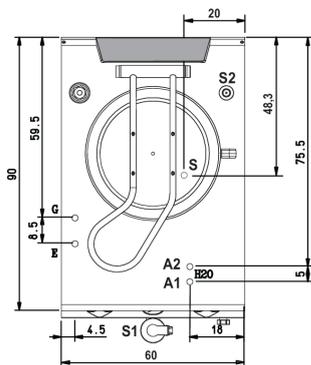

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacchi arrivo acqua - Wasseranschluss -Water inlet
Arrivée eau - Union de agua - Wateraansluiting
- A1** = Calda - Heiss - Warm - Chaude - Caliente - Warm
- A2** = Fredda - Kalt - Cold - Froid - Fria - Koude
- EN ISO 228-1 G 3/4**
- E** Pressacavo entrata linea elettrica
Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable
Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection -
Arrivée gaz - Union de gas - Gasaansluiting
- EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- S** Scarico acqua intercapedine - Wasserablauf Zwischenraum
Jacket water drain - Evacuation eau double enveloppe
Descarga de agua intersticios - Afvoer water tussenruimte
- EN ISO 10226-1 R 3/4**
- S1** Scarico acqua - Wasserablauf - Water outlet
Vidange de l'eau - Desaguadero
Wateraftapaansluiting
1 1/2"

50 LITRE INDIRECT GAS COOKER WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:



CODICE
CR1355989

MODELLO
D93/10PGI05S

SERIE
DIAMANTE90

Product's PLUS

Equipment certified for low voltage
directive 2014/35/EU according to the
international CB scheme.



Thanks to the jet-proofing certification
(IPX5) obtained through specific tests,
knobs and under-knobs can be washed,
without compromising functionality
and safety.



Possibility of hot or cold water loading



Stainless steel tank with aisi 316
bottom



Indirect pans with automatic
condensate drain valve

50 LITRE INDIRECT GAS COOKER WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project:
Rev:
Zone:
Location:



CODICE
CR1355989

MODELLO
D93/10PGI05S

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	
MA97348000	9CV5	
MA97350900	9C10	
MA97351000	9C15	
MA97352000	9CV10	
MA97353000	9CV15	
MA97349000	9-I5	
MA97354000	9-I10	
MA97355000	9-I15	
CR0592789	ZF6	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	