



# ICE CREAM HARDENING CABINETS

Quality, performance and reliability and the design of the Global hardening cabinets have set the industry standard for use in hardening cabinet applications

The hardening cabinets are available in single door or quad door design. Three of the hardening cabinets' temperature range is 0°F to -30°F and the other cabinet is 0°F to -40°F.



All products are certified for energy , safety and sanitation. NSF/ ANSI 7 Standards

## FEATURES

- Single & Quad Door Models
- 20 gauge steel interior/exterior with white powder coat paint
- Solid foamed insulated doors with heated perimeters and mullion(s)
- Patented Kelvinator refrigeration design guarantees consistent temperature
- Digital Temperature Controller with programmable defrost options and LED display
- Expansion valve provides quick pull down and decrease compressor run time
- Auto switch turns off fans when door opened eliminating frost/icing issues
- Fin coil and forced air evaporator coil improve performance of unit
- Heated drain pan dissipates condensation, no plumbing required
- Auto door switch turns off fans if door opens eliminating frost & icing issues

## MODELS

T30HSP Single Solid Door (4) cantilever shelves; (1) bottom shelf; Temp. Range 0°F to -30°F

T50HSQL Quad Door Design (8) cantilever shelves; (2) bottom shelf; Temp. Range 0°F to -30°F

T50HSQHP Quad Door Design (8) cantilever shelves; (2) bottom shelf; Temp. Range 0°F to -40°F

## ACCESSORIES

- Caster Kit
- Shelf Kit
- Gelato Pan Rack Kit
- Black Color Option
- Stainless Steel Exterior Option

**Kelvinator**

# ICE CREAM HARDENING CABINETS

## GLOBAL DOES NOT OFFER BLAST FREEZERS/FLASH FREEZERS

### TECHNICAL DATA

MODEL	T30HSP	T50HSQL	T50HSQHP
<b>Temp Range</b>	0°F to -30°F	0°F to -30°F	0°F to -40°F
<b>Exterior Dimensions</b>			
Length	31"	52"	52"
Depth	36 9/16"	36 1/8"	36 1/8"
Height	83 3/4"	83 3/4"	83 3/4"
<b>Electrical</b>	115/60/1	208-230/115V/60/1	208-230/115V/60/1
<b>Rated Amps</b>	11.5	8.5	9.0
<b>Cubic Feet</b>	27.3	49.1	49.1
<b>Shipping Weight</b>	615 lbs	854 lbs	898 lbs

### SPECIFICATIONS






#### T30HSP, T50HSP, T50HSQL, T50HSQHP

Item: \_\_\_\_\_

The unit construction shall consist of a white powder-coat finished galvanized steel interior and exterior. The unit will be shipped with four cantilever shelves and a bottom rack per full door opening.

Cabinet is specified to use R-404a refrigerant. Refrigeration control shall be mechanical control with a temperature range of 0°F to -30°F or 0°F to -40°F depending upon model.

Cabinet to have standard one-year parts and labor with an extended four-year compressor part only warranty. Cabinet to be UL, C-UL and EPH-UL listed

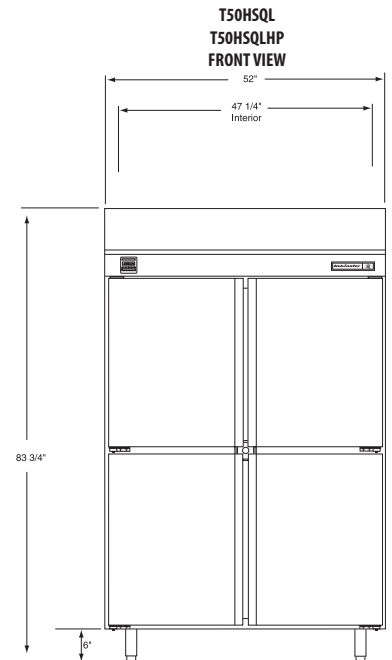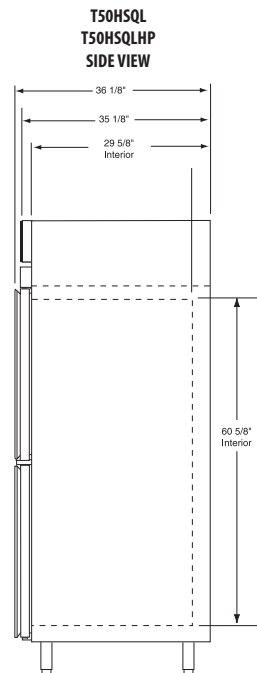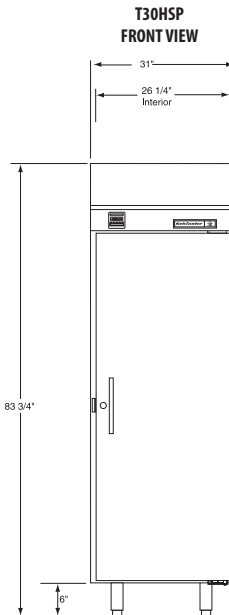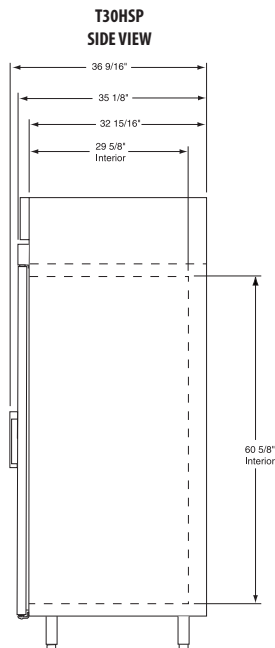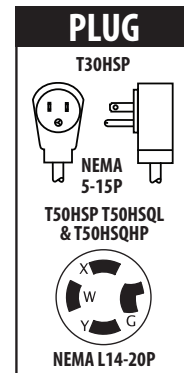

Cabinet designed for optimum performance in air-conditioned area at 70°F to 75°F ambient temperature and 50% to 55% relative humidity.

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.

**Global**  
**Refrigeration, Inc.**

5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com