

ELECTRIC STEAM TILTING KETTLE



Kettle shown with optional Spring Assist Cover and Draw-off valve

- ☐ ELT-20
- ☐ ELT-25
- ☐ ELT-30
- ☐ ELT-40
- ☐ ELT-60
- ☐ ELT-80
- ☐ ELT-100

OPERATION SHALL BE BY:

Electrically, self-generating closed steam system operating at 50 psi equipped for operation on:

- ☐ 208 VAC, 1 phase, 50/60 Hz (12 to 18 kW only)
- ☐ 208 VAC, 3 phase, 50/60 Hz
- ☐ 220 VAC, 1 phase, 50/60 Hz (12 to 18 kW only)
- ☐ 220 VAC, 3 phase, 50/60 Hz
- ☐ 240 VAC, 1 phase, 50/60 Hz (12 to 18 kW only)
- ☐ 240 VAC, 3 phase, 50/60 Hz
- ☐ 380/220 VAC, 3 phase, 4 wire, 50/60 Hz
- ☐ 415/240 VAC, 3 phase, 4 wire, 50/60 Hz

OPTIONS & ACCESSORIES AT ADDITIONAL COST

- | | | |
|---|---|---|
| ☐ 380 VAC, 3 phase, 50/60 Hz. | ☐ Etched gallon markings (GM-) | ☐ Solid disc for draw off (TSS-) |
| ☐ 415 VAC, 3 phase, 50/60 Hz. | ☐ Etched litre markings (LM-) | ☐ Contoured measuring strip (CMS-) |
| ☐ 480 VAC, 3 phase, 50/60 Hz. | ☐ Correctional package | ☐ Strainer hook (SH-) |
| ☐ 600 VAC, 3 phase, 50/60 Hz | ☐ Single pantry faucet with an 18" swing spout (SF-18) | ☐ Pan support (PC-1) |
| ☐ 24 kW on 40, 60, 80 gallon | ☐ Double pantry faucet with an 18" swing spout (DF-18) | ☐ Pour lip strainer (TKS-) |
| ☐ 33 kW on 60, 80, 100 gallon | ☐ Single pantry faucet with 18" swing spout and 68" spray hose and bracket (SF-RSH-18) | ☐ Draw-off valve hose kit (DVHK-) |
| ☐ 2" (50 mm) draw-off valve with perforated strainer (TVT-2) | ☐ Double pantry faucet with 18" swing spout and 68" spray hose and bracket (DF-RSH-18) | ☐ Calibrated thermostat dial, "F" |
| ☐ 3" (76 mm) draw-off valve with perforated strainer (TVT-3) | ☐ One piece lift off stainless steel cover (C-) | ☐ Calibrated thermostat dial, "C" |
| ☐ Spring assist hinged stainless steel cover (CH-) | ☐ Triple basket assembly (TBA-) | ☐ Kettle heat shield (KHS-) |

STANDARD CONSTRUCTION SPECIFICATIONS

Shall be a Crown Model ELT-20, ELT-25, ELT-30, ELT-40, ELT-60, ELT-80 or ELT-100, self-generating, electric tilting kettle.

A double wall kettle interior shall form a steam jacket around the lower 2/3 of the kettle. The jacket enclosure shall contain distilled water which is factory sealed.

The bottom of the kettle shall be of hemispherical design for superior heat circulation.

The console shall be drip proof, stainless steel clad and shall be supported on all welded, 1-5/8" (41 mm) diameter stainless steel pipe frame and legs fitted with 4 hole adjustable flanged feet for securing to floor.

The kettle shall pivot on a trunnion connected to the tilt mechanism and the out-bore bearing connected to the frame and shall permit the kettle to tilt forward a full 90° for complete emptying.

The tilt mechanism shall be self locking for positive stop action.

Construction shall be all welded #4 finish stainless steel, type 304.

The interior liner shall be standard stainless steel type 316 for high acid content cooking.

The controls shall be integrally mounted and shall include a power switch, thermostat, pilot light, low water light, vacuum/pressure gauge, safety relief valve, and low water shut off.


Faucet bracket standard.

The kettle shall be standard with removable elements.

The kettle shall operate in a temperature range of 165°F to 285°F (74°C to 140°C) at a maximum pressure of 50 psi (345kPa).



Approval Notes: _____

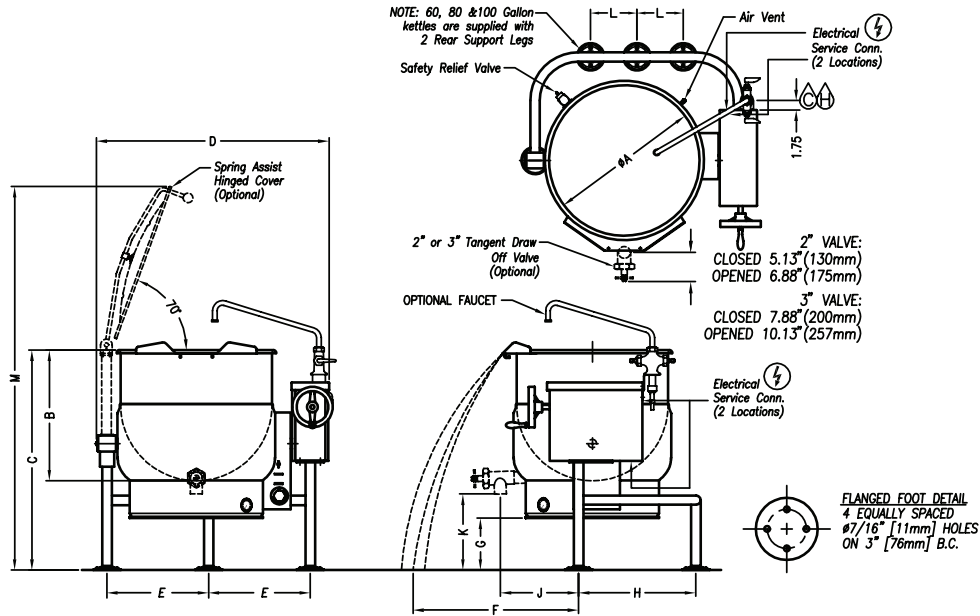

SERVICE CONNECTIONS

- ⚡ – ELECTRICAL CONNECTION : Unless otherwise specified, field wire electrical connection to be 120 volts, 60 Hz, 1 phase with grounding wire. Unit furnished with 6' cord and 3 prong plug. Total maximum amps 4.0.
- 💧 – COLD WATER: 3/8" (10 mm) tubing to faucet (optional)
- 🔥 – HOT WATER: 3/8" (10 mm) tubing to faucet (optional)

DIMENSIONS

MODEL	CAPACITY	UNITS	A	B	C	D	E	F	G	H	J(2")	J(3")	K(2")	K(3")	L	M
ELT-20	20 gallons (76 liters)	in (mm)	21" (533)	18" (457)	38" (965)	36" (914)	15" (381)	18" (457)	14" (356)	17.75" (450)	11.45" (290)	15.5" (394)	18" (457)	17.5" (445)	N/A	63.5" (1613)
ELT-25	25 gallons (95 liters)	in (mm)	21" (533)	21.25" (540)	37.25" (946)	36" (914)	15" (381)	18" (457)	9.5" (356)	17.75" (450)	11.45" (290)	13.13" (333)	14.38" (365)	17.13" (435)	N/A	64.62" (1642)
ELT-30	30 gallons (114 liters)	in (mm)	24" (610)	20" (508)	38" (965)	39" (990)	16.5" (419)	19" (483)	12.38" (314)	19.25" (489)	16.75" (425)	17.25" (438)	16" (406)	15.5" (394)	N/A	66.5" (1689)
ELT-40	40 gallons (152 liters)	in (mm)	26" (660)	22.5" (572)	38" (965)	41" (1041)	17.5" (445)	23" (584)	10" (254)	20.25" (514)	17.5" (445)	18.5" (470)	13.5" (343)	13" (330)	N/A	68.5" (1740)
ELT-60	60 gallons (227 liters)	in (mm)	29.5" (749)	26" (660)	42" (1067)	44.5" (1130)	19.13" (486)	24" (610)	11" (280)	22.25" (565)	19.5" (495)	20.75" (527)	14" (356)	13.5" (343)	10.5" (267)	76" (1930)
ELT-80	80 gallons (303 liters)	in (mm)	33" (838)	28" (711)	45" (1143)	48" (1219)	20.88" (530)	27" (686)	12.63" (321)	23.75" (603)	20.25" (514)	21.25" (540)	15" (381)	14.5" (368)	12" (305)	82.5" (2096)
ELT-100	100 gallons (379 liters)	in (mm)	35.5" (902)	29.75" (755)	48.75" (1238)	49.5" (1257)	22.25" (565)	32" (813)	14.5" (368)	25.25" (641)	20.25" (514)	21.25" (540)	18.75" (476)	18.25" (464)	14" (356)	88.5" (2248)

ELECTRICAL CHARACTERISTIC

AVAILABLE kW			AMPS PER LINE								
MODEL	STANDARD	OPTIONAL	kW	PHASE	208V	220V	240V	380V	415V	480V	600V
ELT-[20,25]	12	N/A	12	1	57.7	54.5	50.0	N/A	N/A	N/A	N/A
ELT-30	15	N/A		3	33.3	31.5	28.9	18.2	16.7	14.4	11.6
ELT-40	18	24	15	1	72.1	68.2	62.5	N/A	N/A	N/A	N/A
ELT-60	18	24 or 33		3	41.6	39.4	36.1	22.8	20.9	18.0	14.5
ELT-80	18	24 or 33	18	1	86.5	81.8	75.0	N/A	N/A	N/A	N/A
ELT-100	24	33		3	50.0	47.2	43.3	27.3	25.0	21.7	21.7
			24	3	66.6	63.0	57.7	36.5	33.4	28.9	23.1
			33	3	91.6	86.6	79.4	50.1	45.9	39.7	31.8

SPECIFICATIONS

MODEL	SHIPPING WEIGHT	MINIMUM CLEARANCE		CAPACITY		MODEL	SHIPPING WEIGHT	MINIMUM CLEARANCE		CAPACITY	
ELT-20	296 lbs. [134 kg]	SIDES BACK	0" [0 mm] 0" [0 mm]	20 Gallon	76 Liter	ELT-60	417 lbs. [189 kg]	SIDES BACK	0" [0 mm] 0" [0 mm]	60 Gallon	227 Liter
ELT-25	300 lbs. [136 kg]			25 Gallon	94 Liter	ELT-80	520 lbs. [236 kg]			80 Gallon	303 Liter
ELT-30	313 lbs. [142 kg]			30 Gallon	114 Liter	ELT-100	630 lbs. [286 kg]			100 Gallon	379 Liter
ELT-40	352 lbs. [160 kg]			40 Gallon	152 Liter						

INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.

