

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

# **DUAL TEMP UNDERCOUNTER**

UCFR48AHC Undercounter Freezer/Refrigerator Hydrocarbon Series

MODEL: **UCFR48AHC** 





#### **CABINET CONSTRUCTION**

- Stainless steel front, sides, doors, and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Dual Temp: left side freezer, right side refrigerator unit provide two different operating temperature zones for different types of products
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Internal thermometer is standard
- Self-closing doors with 120° stay-open feature, on cartridge style
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handles
- 6" Casters, two (2) with brakes standard
- Four (4) epoxy-coated steel wire shelves
- Field reversible doors (hinge kit not included)

### **OPTIONS & ACCESSORIES**

- Stainless steel back
- Stainless steel interior
- · Right or left hinged door
- Locks (solid doors only)
- Bun rack
- · Wire shelf divider
- 3" Casters or 6" legs
- Low profile casters
- Remote option\* (see note on back page)

### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- Freezer has an electric defrost, refrigerator has a non-electric
- Freezer maintains product temperature from -10°F and below
- Refrigerator maintains product temperatures between 36°F and
















MODEL	UCRF48AHC
EXTERNAL DIMENSIONAL DATA	
Width Overall	48"
Depth Overall (with handle & bumper)	32"
Height Overall (with casters)	34 ½"
Number of Doors	2
Depth with Door Open 90°	52 1⁄4"
Door Opening (in)	19 ½" x 21 ¾"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	(F) 5.31 (R) 5.31
Internal Width Overall (in)	(2) 21"
Internal Depth Overall (in)	15 %"
Internal Height Overall (in)	23"
Number of Shelves	4
ELECTRICAL DATA	
Full Load Amperes	(F) 2.5 (R) 2.0
REFRIGERATION DATA	
Horsepower	(F) 1/4 (R) 1/6
Capacity (BTU/Hr)	(F) 857 (R) 1110
Heat Rejection (BTU/Hr)	2950.5
Charge (lbs/grams)	(F) 0.0992/45 (R) 0.1323/60
SHIPPING DATA	
Gross Weight - Crated	297 lbs
Height - Crated	34"
Width - Crated	52"
Depth - Crated	32"

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# **Dual Temp Undercounter** Model: UCFR48AHC

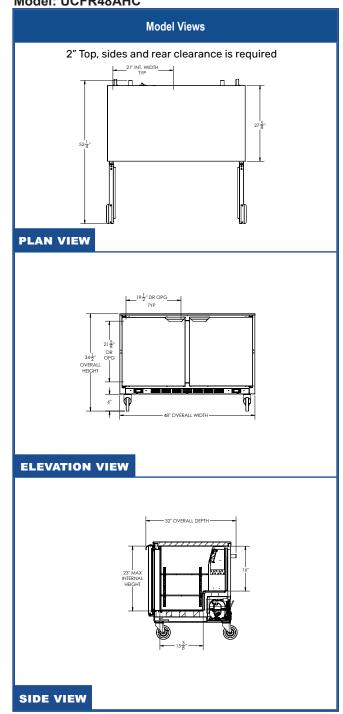















### **ELECTRICAL CONNECTION**



Unit pre-wired at  $_{\rm 115/60/1}$  factory and IIICiuue  $_{\rm V}$  NEMA-5-15P 8' long cord and plug factory and include (2)