



# Zip HydroChill HC10

---

## FILTERED: CHILLED SPARKLING AMBIENT

---

With 45 litres per hour of chilled, sparkling and ambient filtered water, this counter-top product is ideal for high capacity scenarios where pure-tasting water is needed. This model features push-button controls for ease of use.



MODEL	TAP STYLE	ULTRA VIOLET	CAPACITY (L/HR)	NOMINAL POWER RATING KW	DIMENSIONS W X D X H
HC10IT45	Push Button	N	45 L/hr	0.265 kW @ 230V AC	318mm x 499mm x 470mm

## Features and benefits

### Pure, clean water

Provide pure-tasting water in an instant, thanks to Zip's 3 micron MicroPurity filtration system, which removes impurities and contaminants.

### Environmentally responsible

Create a healthier, greener workplace with no need for plastic bottles.

### Caters for high volume usage

The HydroChill range has been designed to cater for commercial settings where large volumes of drinking water are required. In fact, the HydroChill Under-Counter HC50 has the capability to provide up to 150 litres of chilled or sparkling water an hour from a single unit.

### Consumables and accessories

Serve clean-tasting water in a professional way by using Zip's table-top glass bottles.

### Easy to install

Quick and simple to install and use.

## Product detail

---

### Specification type

Product code	HC10IT45
Product name	HydroChill HC10 counter-top 45ltr chilled, ambient and sparkling push button
Cooling Technology	Aluminium fusion block heat exchanger
Factory Temperature Range	5-12°C
Refrigerant gas	Natural gas R290



**WARNING** R290 is a CFC free, environmentally friendly but highly flammable gas. The product should be installed and operated within the instructions in the supplied manual

### Capacity, weights & dimensions

Water Functions	Chilled, Sparkling, Ambient
Capacity (litres per hour)	45 L/hr
Product weight	35kg
Unit dimensions (W x D x H) mm	318mm x 499mm x 470mm

### Plumbing

Whole cold water inlet supply required	Yes
Inlet pipe	15mm
Supply pressure range	2.5bar (Min) - 3.5bar (Max)
Installation	Must comply with current water supply regulations

The minimum water pressure will vary if a limescale filter is installed. Please contact us to discuss your requirements.

### Electrical

Nominal power rating kw	0.265 kW @ 230V AC
Power supply option	1x 13amp socket outlet
Installation	Must comply with current IEE regulations

### Filtration

Taste & Odour Filtration Kit - available to purchase	HCF3S - Zip MicroPurity filter HD 3 Micron 30 - 80 l/ph with CO2 Regulator
Sterilising UV filtration at point of dispense	No

## CO<sub>2</sub> Gas

---

CO<sub>2</sub> regulator and fittings supplied, cylinder not supplied

---



**STORAGE WARNING** CO<sub>2</sub> contains gas and should be installed in a well ventilated area. Refer to installation manual for more information.

## Warranty

---

2 years on-site parts and labour on site


Terms and conditions apply (see supplied manual)

---

## Technical drawings & dimensions

---

All dimensions in mm

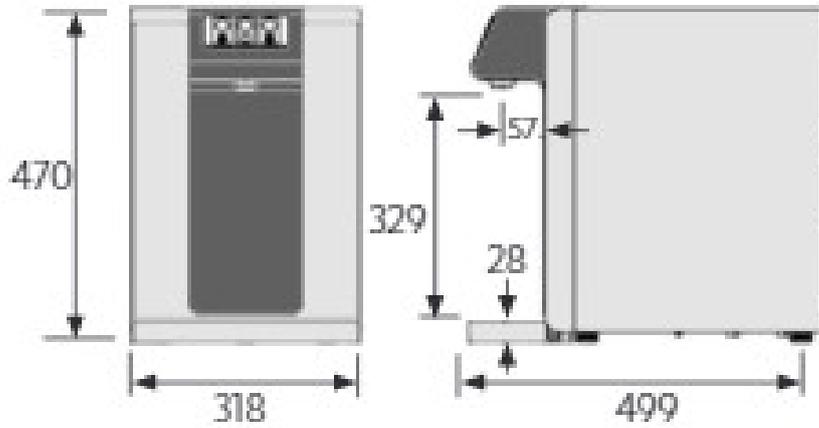

**HC10 45 litre**

## Accessories

---

Visit [specify.zipwater.co.uk](https://specify.zipwater.co.uk) to find out more information about Zip HydroChill HC10 Accessories

Image	SKU	Title
 IMAGE COMING SOON	94777	45 Litre Cabinet for HC10

---