

Schaerer Coffee Skye

Your Schaerer that goes
everywhere.



Take the Schaerer quality and variety anywhere you need to. Just wheel in your new Schaerer Coffee Skye: its internal water tank allows you to serve the full range of Schaerer's top quality coffee and milk based beverages virtually everywhere. All you need is a power connection, and a party to cater for!

easygoing | eclectic | entertaining | eventful

Take the Schaerer quality and variety everywhere.

Standard Features

- 8.0" touch screen display
- Single grinder with 750 g bean hopper volume and Manual inlet ("Decaf")
- Hot water on the left
- Functional illumination (left & right of the central outlet)
- Black housing and splash zone with red or black design elements
- Manual outlet with single/double coffee spout including relief chamber
- Internal water tank with closed and monitored drip tray

Optional Features

- Pure Foam milk system
- Single/twin powder (2000g/2x1000g) on the left
- Second grinder on the right
- Electrical adjustment per grinder
- Espresso blades per grinder
- Fixed water connection with Uptime!
- Central hot water outlet
- Powersteam or Supersteam on the right
- Brewing accelerator or additional water
- Side cooling unit left or right 1x7l
- Cooling unit 1x10l (Centre Milk or undercounter possible)
- 16g or 30g brewing unit possible

Technical specifications:


| | |
|---|--------------------|
| Weight | Approx. 40 kg |
| Recommended for an average daily requirement of | Up to 180 cups |
| Width / | 330 mm / |
| Depth / | 576 mm / |
| Height body / incl. hoppers / incl. keys | 524 / 680 / 697 mm |

User interface

Video capable 8.0" touch screen with 1024 × 768 px resolution and the same GUI as the Coffee Soul with three different operation modes: Guest, Frequent user and Staff.

Simplified installation

All connections required for the installation are accessible from the front (main power, add-on devices, fixed water connection, waste water drain). No tools needed to remove the connection piece for the waste water hose. Under counter device – simple hose mounting without dismantling the side walls.

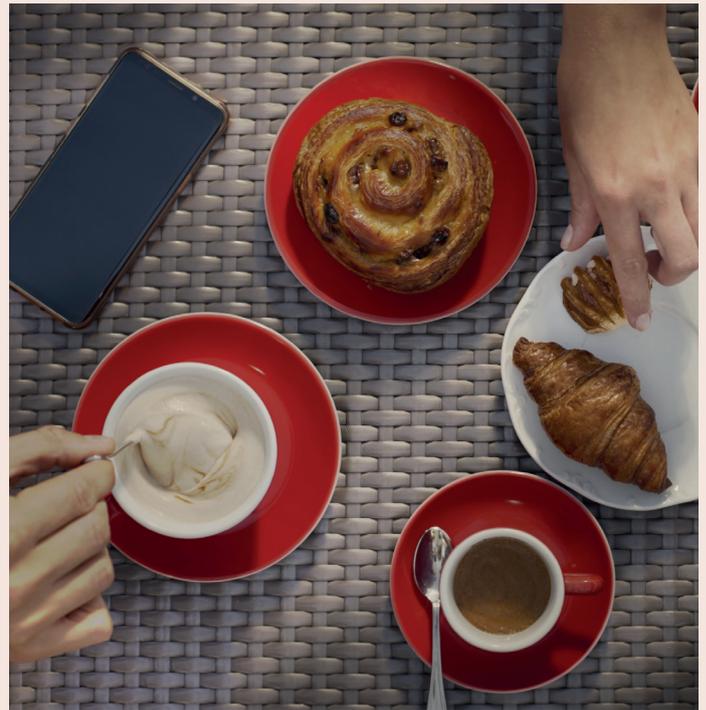

New Pure Foam milk system

A milk pump system with controlled temperature that can supply hot milk & hot milk foam, as well as cold milk, to offer a wide variety of beverage options. Hot milk and milk foam dispensing temperature is consistent and ranges from 50 °C to 70 °C. The milk foam is homogenous, creamy & fine-pored with a foam content of up to 60%. No resources are wasted since there is no need for pre or post-treatment with water. The system has a very small internal volume, and needs very little water for rinsing and cleaning.

Functional illumination

Two illuminated stripes on either side of the central outlet. The functional illumination shows the status of the machine (white - ready, yellow - maintenance required soon, red - machine error, maintenance needed).

New locking mechanism for hoppers

Hoppers attachment above and outside machine lid. Hoppers are individually removable for easy cleaning. As an option - One key lock mechanism for the three hoppers and the display ensures safe attachment to the machine and prevents unintentional removal.