

SPR07PDXR

Product Family	Blast chillers
Subfamily	Chiller
Type	700 l
Type of temperature control	Electronic
Temperature range	Positive -2°C / +8°C
Doors number	1
Panel type	Electro-mechanical
Hinge position	Right
Reversible door	Yes
Sides	With racks
Material	Stainless steel
Internal material	Stainless steel AISI 304
Refrigerating unit	Upper monobloc
Handle type	Fixed
Handle material	Painted aluminium with anti-scratch and anti-corrosion treatment
Display	LCD
EAN code	8017709340261



Target

Potential users	Bars/Cafes; Hotels; Restaurants/Catering; Butcher's shops; Meat processing industry; Hospitals; Schools; QSR
Industry	Gastronomy

Aesthetics

Colour	Stainless steel
--------	-----------------

Functions



Functions display	Fast cooling, Control lock, Alarms
Door open alarm	Yes
Temperature alarm	Acoustic and visual
Power failure alarm	Acoustic and visual
Probes failure alarm	Acoustic and visual
Usb	yes, with optional kit
HACCP data download	Yes

Performance / Energy Label



Refrigerant gas type	R290	GPW parameter	3 (R290)
----------------------	------	---------------	----------

Energy efficiency class	A	Tropicalised unit at 43°C	Yes
Annual energy consumption	321 kWh/a	Energy efficiency index EEI	23 %
Energy Consumption (E24h)	880 Wh	Forced ventilation	Yes
Cabinet type	Heavy-duty cabinet	Noise level	<49 dB(A) re 1 pW
Climatic class	5 (40°C - 40%)		

Electrical Connection

Power supply	230V ~ / 1 A / 50Hz
Frequency	50Hz
Plug	(F;E) Schuko
Nominal power	145 W
Power supply cable length	160 cm

Construction



Net freezing capacity in litres	465 l
Width (mm)	575 mm
Depth of the built-in niche	690 mm
Height with feet	1470 mm
Insulating body thickness	80 mm
Insulating door thickness	60 mm
Insulation material	Polyurethane foam
CFC/HCFC free	Yes
Shelves dimensions	GN2/1
Shelves pitch	50 mm
Maximum loading weight per shelf	25 Kg
Tray support and guides	S/s wire for GN1/1
Roll-over guides	Yes
Defrosting by hot gas	Yes
Defrost water evaporation	Automatic with hot gas
Internal air flow	Yes
Door opening	180° with stop at 150°
Automatic closing door	Yes
Automatic ventilation lock when opening door	Yes
Magnetic gasket	Yes
Roundend corner cold room	Stainless steel
No. of compressors	1

Equipment

Grids	3	Door lock	Yes
Grid type	GN2/1	Internal light	STRIP LED with low energy consumption
Grids material	Steel with plastic coating	Wheels	4 (2 with break)

Logistic Information

Dimensions of the product HxWxD (mm)	2105x740x845 mm
Dimensions of the packed product (mm)	2260X780X890 mm
Net weight (kg)	140.000 kg
Gross weight (kg)	152.000 kg

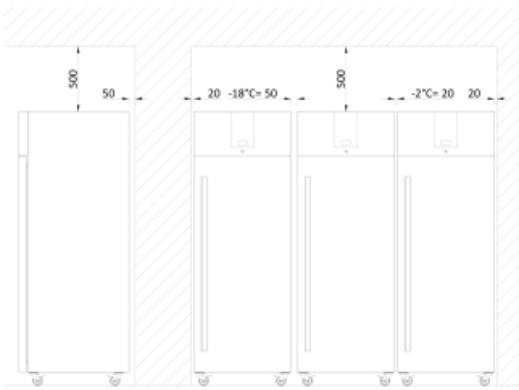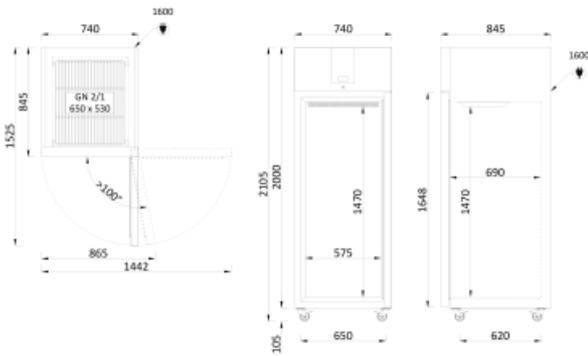

Not included accessories


KCAST4

4 rotating castors (2 with stop)




KSHELF1X

Stainless steel shelf kit



KGRID1P

Plastic grid for 700 and 1400 l refrigerated cabinets



KCABLEUK

Power cable with UK plug



KITBLE

Bluetooth connection kit


KSLIDES2X

Stainless steel support shelves kit for refrigerated cabinets with racks



KGRID1X

Stainless steel grid for 700 and 1400 l refrigerated cabinets. To be combined with the guides kit model KSLIDES2X for cabinets with racks.



KFEET4

4 stainless steel feet kit



KCABLEAU

Power cable with UK plug



Symbols glossary

- | | | | |
|--|--|---|--|
|  | A: Product drying performance, measured from A+++ to D / G depending on the product family |  | Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed. |
|--|--|---|--|