BEVERAGE-AIR

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

APPROVED: _____

P SERIES TOP MOUNT DUAL TEMPS

P SERIES TOP MOUNT DUAL TEMPS

Model: PRF12-12HC-1HS

HALF SOLID DOOR / DUAL-TEMPS / REACH-IN



7 YEAR WARRANTY

Parts, Labor, and Compressor

CABINET CONSTRUCTION

- Stainless steel exterior door, sides, and front (galvanized top, back & bottom)
- Interior corrosion resistant aluminum
- Stainless steel door liner
- Full electronic control with exterior digital thermometer
- Expansion valve technology
- Variable speed technology
- Stainless steel braker covers
- Dual temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Top section refrigerator
- Bottom section freezer
- Self-closing doors on cam-lift hinges, with 120˚ hold open feature
- One-piece snap-in magnetic door gaskets for positive seal
- Door locks standard
- Four (4) heavy-duty epoxy coated shelves
- 6" Legs

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Zone operating temperature configuration (R/R, F/R, F/F)
- Tray slide kit
- Left and right hand door swing (at time of order)
- 3" and 6" Casters
- Sesmic/flanged legs
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerator maintains product temperatures of 36˚- 38˚F
- Freezers maintains product temperatures of -10˚F

3779 Champion Blvd., Winston-Salem, NC 27105
888-845-9800 Fax: 336-245-6453
Beverage-Air.com Sales@bevair.com

Please verify qualifying units by visiting:
www.energystar.gov/cfs


Specifications are subject to change without prior notice.

Date Issued 11/26 Printed in U.S.A.


BEVERAGE-AIR

P Series Dual Temps
Model: PRF12-12HC-1HS


PLAN VIEW

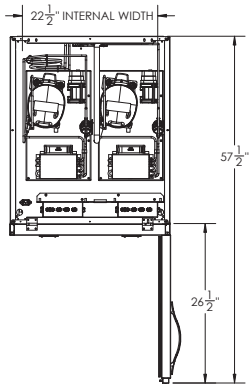

ELEVATION VIEW

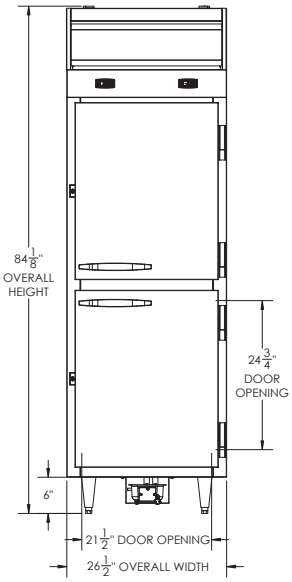

SIDE VIEW

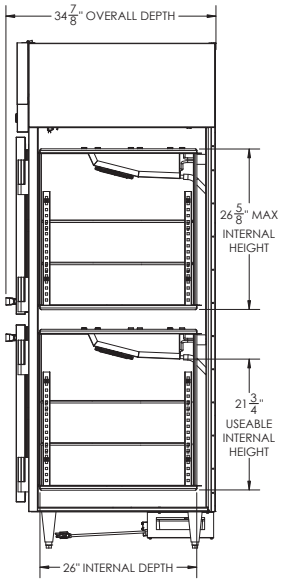

EXTERNAL DIMENSIONAL DATA	
Width Overall (in)	26 1/2"
Depth Overall (in)	34 7/8"
Height Overall (in)	84 1/8"
Number of Doors	2
Depth with Door Open 90 °	57 1/2"
Door Openings (in)	21 1/2" x 24 3/4"
INTERNAL DIMENSIONAL DATA	
NET Capacity R/F (cubic ft).	9.0 / 9.0
Internal Width Overall (in)	22 1/2"
Internal Depth Overall (in)	26"
Internal Height Top (in)	26 5/8"
Internal Height Bottom (in)	21 3/4"
Number of Shelves	4

ELECTRICAL DATA	
Full Load Amps	R 7.5 / F 7.5
Voltage	(2) 115/60/1
Nema Plug (8' cord)	2 (5-15P)
REFRIGERATION DATA	
Horsepower R/F	1/3 / 1/3
Capacity (BTU/Hr) R/F	R 3000 / F 3000
Heat Rejection (BTU/Hr) R/F	R 4500 / F 4500
Charge (lbs/grams/ounces) R/F	R 0.165 / 74.8 / 2.6 F 0.165 / 74.8 / 2.6
SHIPPING DATA	
Gross Weight - Crated	425 lbs.
Height - Crated (in)	88"
Width - Crated (in)	41"
Depth - Crated (in)	36"

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: 12" Top

ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P (2)

Unit pre-wired at factory and include 8' long cord and plug set.

NOTE: Units that utilize variable speed compressor technology can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using either an Eaton, SGF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 11/26 | Printed in U.S.A.

WELBILT
an ALI Group Company