

Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

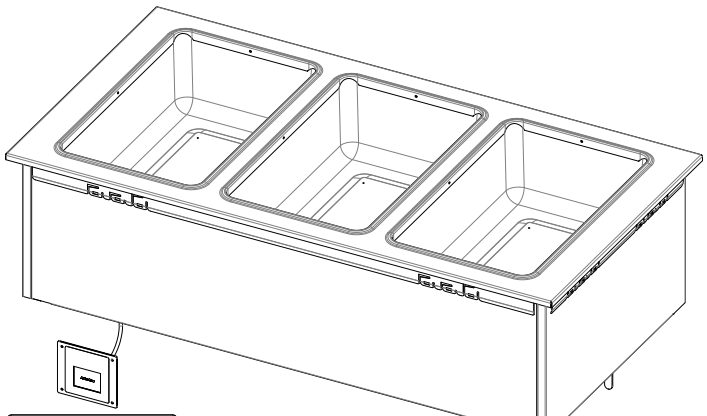



SHW3-SB

OPTIONS:

- ❒ Basic Control with infinite switches in control boxes w/stainless steel face plate. contact factory for details.
- ❒ Hug Edge Top
- ❒ 3 phase power (except SHW1-SB)
- ❒ Individual valves
- ❒ Manifold drains
- ❒ Master valve
- ❒ Designer Foodshields
- ❒ Adapter Plates
- ❒ Adapter Bars

Approval Stamp(s):

PRODUCT INFORMATION:
PROJECT: _____
ITEM: _____
QUANTITY: _____

MODEL:
Drop-Ins - Hot Food
Electric - Sealed Well

❒	SHW1-SB	18 ¼"L x 24 ¼"W x 12 ¾"H
❒	SHW2-SB	32 ¼"L x 24 ¼"W x 12 ¾"H
❒	SHW3-SB	46 ¼"L x 24 ¼"W x 12 ¾"H
❒	SHW4-SB	60 ¼"L x 24 ¼"W x 12 ¾"H
❒	SHW5-SB	74 ¼"L x 24 ¼"W x 12 ¾"H
❒	SHW6-SB	88 ¼"L x 24 ¼"W x 12 ¾"H

TOP RIM:

- ■ Heavy gauge, 300 Series stainless steel
- ■ Overhang on front, back and ends w/ 90 degree turn downs and w/ locking tabs
- ■ Die-stamped openings - 11 7/8" x 19 7/8"

HEAT COMPARTMENTS:

- ■ 6-1/2" deep stainless steel liner, wet operation
- ■ Fully insulated
- ■ Sealed element in each compartment
  - ❑ 750 Watt
  - ❑ 900 Watt
  - ❑ 1200 Watt
- ■ Individual open drains

CONTROL PANEL:

- ■ Standard intuitive, easy to use touch screen control
- ■ Easily adjusted presets LOW/MED/HIGH
- ■ Built-in WIFI and Bluetooth for future connectivity.
- ■ UL approved

EXTERIOR HOUSING

- ■ Heavy gauge paint grip steel

Agency Listings:

c UL us

DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102
800.735.3853 Toll Free
314.231.5074 Fax
www.dukemfg.com

Specification subject to change

WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

DROP-IN - HOT FOOD - ELECTRIC - SEALED WELL


Catalog No. ASHW-ELECHFSB

A.I.A. File No. 35-C-13

Drop-Ins - Hot Food Electric - Sealed Well

A.I.A. File No. 35-C-13

Catalog No. ASHW-ELECHFSB

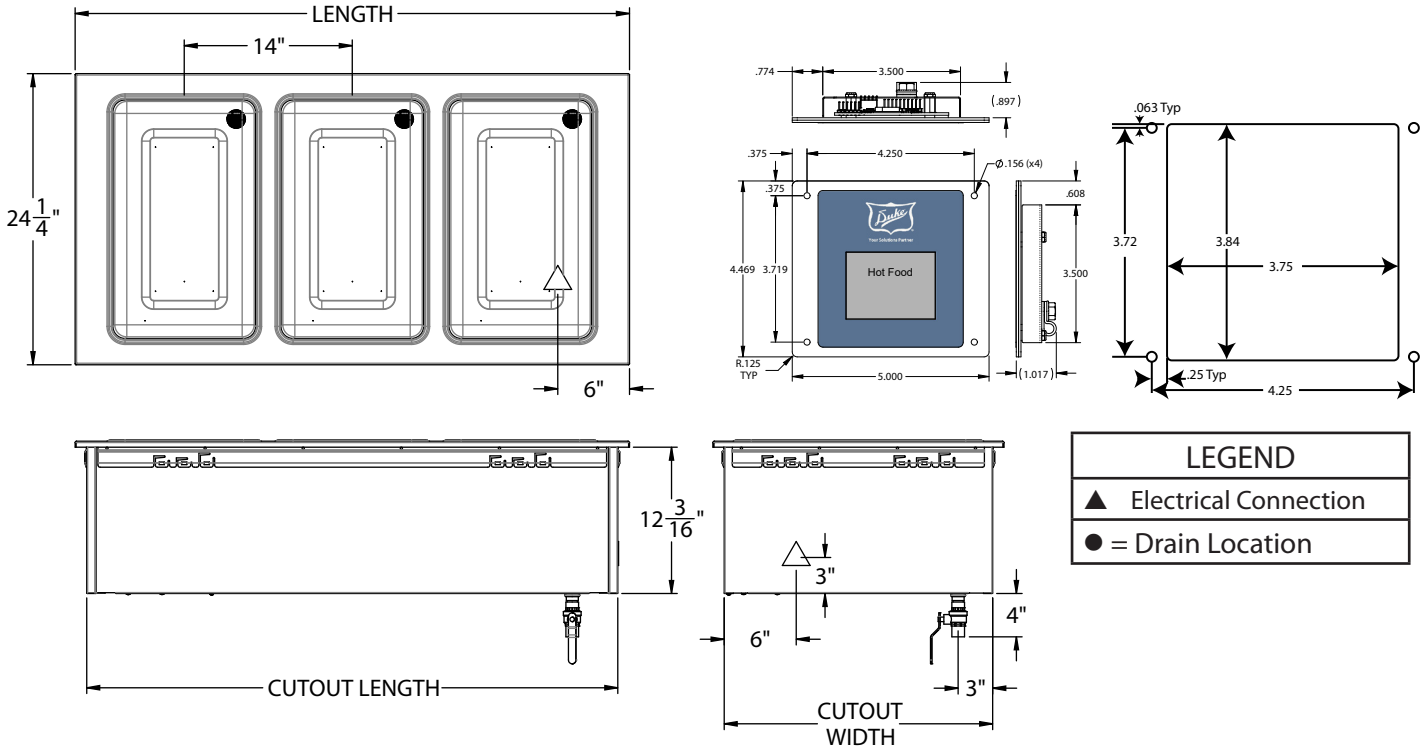

LEGEND
▲ Electrical Connection
● = Drain Location

Dimensions: **Freight Class 100**

Model	Length		Width		Height		Top Openings	Cutout Width		Cutout Length		Cube ft. Crated	Weight	
	in	cm	in	cm	in	cm		in	cm	in	cm		lbs	kg
SHW1-SB	18 ¼	46.4	24 ¼	61.6	12 ¾	32.4	1	23.125	58.74	17.25	43.82	8.2	43	19.6
SHW2-SB	32 ¼	81.9	24 ¼	61.6	12 ¾	32.4	2	23.125	58.74	31.25	79.375	13.0	75	34.1
SHW3-SB	46 ¼	117.5	24 ¼	61.6	12 ¾	32.4	3	23.125	58.74	45.25	114.94	17.7	90	40.9
SHW4-SB	60 ¼	153.0	24 ¼	61.6	12 ¾	32.4	4	23.125	58.74	59.25	150.50	22.5	115	52.3
SHW5-SB	74 ¼	188.6	24 ¼	61.6	12 ¾	32.4	5	23.125	58.74	73.25	186.06	27.2	140	63.6
SHW6-SB	88 ¼	224.2	24 ¼	61.6	12 ¾	32.4	6	23.125	58.74	87.25	221.62	32.0	220	100.0

Electrical Specifications:

(Consult factory for 3-phase electrical requirements and other options)

Model	120V 750W			208V 750W			208V 900W			240V 750W		
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA
SHW1-SB	834	7.0	5-15	834	4.0	6-20	984	4.7	6-20	834	3.5	6-20
SHW2-SB	15.84	13.2	L5-30	1584	7.6	6-20	1884	9.1	6-20	1584	6.6	6-20
SHW3-SB	2338	19.5	L5-30	2338	11.2	6-20	2788	13.4	6-20	2338	9.7	6-20
SHW4-SB	3088	25.7	5-50	3088	14.8	6-20	3688	17.7	L6-30	3088	12.9	6-20
SHW5-SB	3842	32.0	5-50	3842	18.5	L6-30	4592	22.1	L6-30	3842	16.0	L6-30
SHW6-SB	N/A			4592	22.1	L6-30	5492	26.4	6-50	N/A		

Model	120V 1200W			208V 1200W				240V 1200W		
	Watt	Amps	NEMA	Watt	Amps	NEMA		Watt	Amps	NEMA
SHW1-SB	1284	10.7	5-15	1284	6.2	6-20		1284	5.4	6-20
SHW2-SB	2484	20.7	L5-30	2484	11.9	6-20		2484	10.4	6-20
SHW3-SB	3688	30.7	5-50	3688	17.7	L6-30		3688	15.4	6-20
SHW4-SB	N/A			4888	23.5	L6-30		4888	20.4	L6-30
SHW5-SB	N/A			6092	29.3	6-50		6092	25.4	6-50
SHW6-SB	N/A			7292	35.1	6-50		7292	30.4	6-50

DROP-IN - HOT FOOD - ELECTRIC - SEALED WELL

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Your Solutions Partner

Printed in U.S.A
© 2025, Duke Manufacturing Co.