

ELECTRIC FAN-ASSISTED RANGES



E3101 OTC
Four Hotplate Range

MODELS and ACCESSORIES

E3101OTC 3HP - Three hotplate range - fan-assisted oven

E3101OTC 4HP - Four hotplate range - fan-assisted oven

- Fully integrated extended flue
- Splashplate and plateshelf
- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit
- Suiting kit

KEY FEATURES

- Full depth heavy duty cast iron hotplates
 - Allow multiple cooking positions
- Three and four hotplate models available
 - Provides versatility for varied menus
- Fast-acting circular hotplates
 - Reduces heat up times, energy efficient
- Full width, removable drip tray
 - Retains spillages and keeps unit clean
- Vitreous enamelled oven chamber
 - Easy to clean and to keep clean
- Wide oven temperature range of 100 - 250°C
 - Ideal to prepare a wide variety of food
- Glass panels in oven doors
 - Monitor cooking without losing valuable heat
- Ovens have twin doors with individual catches
 - Retains heat within the oven chamber
- Oven has 5 shelf positions to allow 2 shelf cooking
 - Versatile, ideal for a wide range of menu items
- Low profile door handles
 - Reduces intrusion into work space
- Laser-etched control icons
 - Permanent, indelible markings

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.






DOMINATOR^{PLUS}

ELECTRIC FAN-ASSISTED RANGES

MODEL DIMENSIONS (in mm)

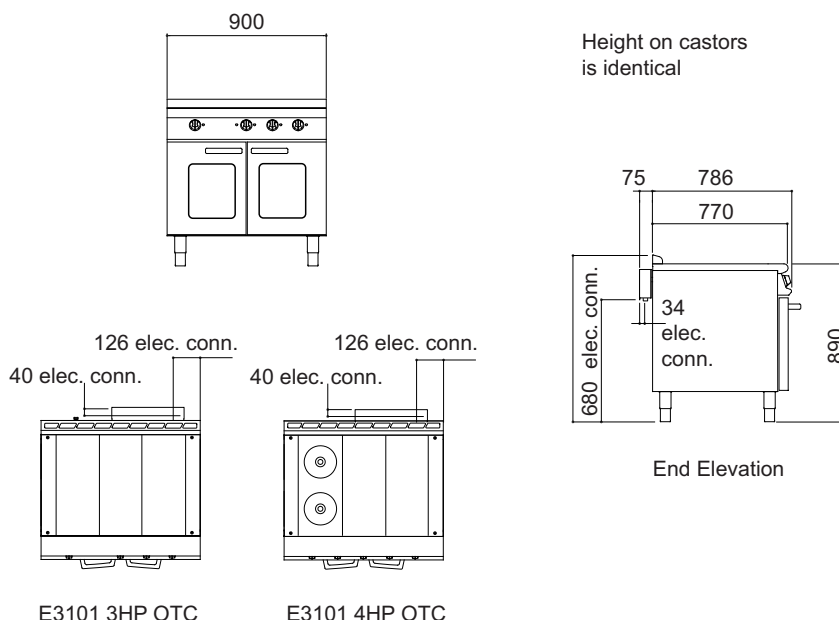

SPECIFICATION DETAILS

	E3101 OTC 3HP	E3101 OTC 4HP
Electrical rating (kW)	16.2	16.5
Electrical supply voltage	400V 3N~ / 230V~	400V 3N~ / 230V~
Minimum electrical supply 230V ~ (amps)	100	100
Minimum electrical supply 400V 3N~ (amps)	32	32
Electrical current split (amps)	L1: 28 / L2: 14 / L3: 28.3	L1: 22.7 / L2: 22.7 / L3: 28.3
Hotplate rating (kW)	3.2 x 3	3.2 x 2 / 1.8 x 2
Total oven element rating (kW)	6.4 (2 x 3.2)	6.4 (2 x 3.2)
Oven dimensions (w x d x h - mm)	700 x 535 x 430	700 x 535 x 430
Oven shelf (w x d - mm)	700 x 535	700 x 535
Gastronorm compatibility	2/1	2/1
Weight (kg)	157	159
Packed weight (kg)	175	177