

# ELECTRIC MANUAL BRAISING PANEL 43 lt. WITH STAINLESS STEEL BOTTOM

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0989989

MODELLO  
D74/10KBEI

SERIE  
DIAMANTE70



## GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

## TECHNICAL SPECIFICATIONS

Multifunctional tilting braising pan, equipment for professional catering, suitable for cooking sauces, braises and cooking with oil. It guarantees high performance, exceptional firing uniformity. Water supply directly into the tank via solenoid valve (can be ordered as an accessory).  
Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

AISI 304 stainless steel cooking vessel, 2 mm thick.

Cooking temperature controlled by thermostat with adjustment from 100 to 280°C. Heating via armoured incoloy heating elements.

Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss.

Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained through specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

# ELECTRIC MANUAL BRAISING PANEL 43 lt. WITH STAINLESS STEEL BOTTOM

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0989989

MODELLO  
D74/10KBEI

SERIE  
DIAMANTE70

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0989989
DEFINITION	D74/10 KBEI BRAISING PAN EL.80 INOX
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	730 mm
DIM. HEIGHT	870 mm
NET WEIGHT	108,000 Kg
VOLUME (net)	0,508
PACKAGE LENGTH	840,000 mm
PACKAGE WIDTH	850,000 mm
PACKAGING HEIGHT	1170,000 mm
PACKAGE VOLUME	0,836 m3
GROSS PACKING WEIGHT	121,000 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9,900 kW
IP GRADE	IPX4
CERTIFIED MODEL	D74/10 KBEI

# ELECTRIC MANUAL BRAISING PANEL 43 lt. WITH STAINLESS STEEL BOTTOM

Project: .....  
 Rev: .....  
 Zone: .....  
 Location: .....




CODICE  
CR0989989

MODELLO  
D74/10KBEI


SERIE  
DIAMANTE70

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

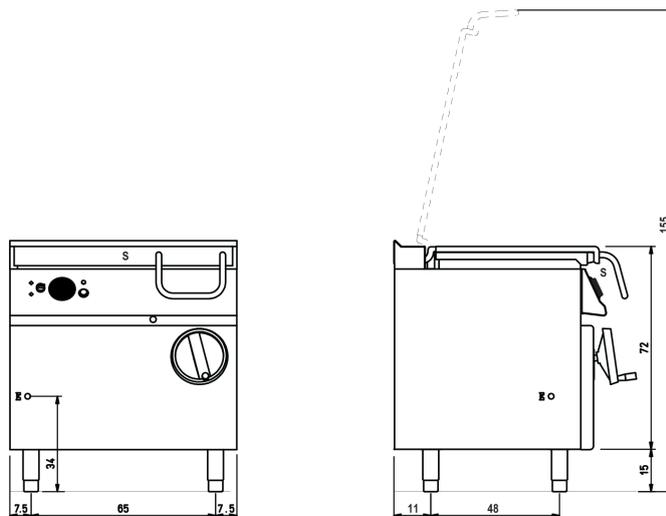

(D) 74/10 KBE ...

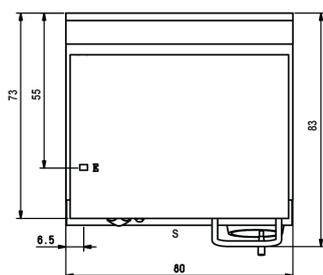

### Legenda - Legende - Key - Légende - Leyenda - Legend

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- S** Scarico vasca - Wannenausflussrohr - Pan outlet  
 Vidange du bac - Descarga cuba - Water toevoer

2

# ELECTRIC MANUAL BRAISING PANEL 43 lt. WITH STAINLESS STEEL BOTTOM

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0989989

MODELLO  
D74/10KBEI

SERIE  
DIAMANTE70

## Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Self-balancing lids.



Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



# ELECTRIC MANUAL BRAISING PANEL 43 lt. WITH STAINLESS STEEL BOTTOM

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0989989

MODELLO  
D74/10KBEI

SERIE  
DIAMANTE70

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0592799	ZF8	
CR0592830	ZG	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CMF0708	CMF0708	
CR0599649	7ZL	