

# DESIGNER LINE ROLL-IN WARMER

**Model: DL2WI**

*Designer Line*

## 2-Section Roll-In Warmer with 66¼" Cart Capacity

**DL2WI** - Stainless steel front, aluminum end panels and interior  
**DL2WI-SA** - Stainless steel exterior, aluminum interior  
**DL2WI-SS** - Stainless steel exterior and interior



### Options and Accessories

(upcharge and lead times may apply)

|   |  |
|---|--|
| Stainless steel case back                 | Roll-thru (consult factory)  |
| Chrome or stainless steel shelves         | <b>Correctional Facility Options</b>   |
| Rehinging of door (consult factory)       | <ul style="list-style-type: none"> <li>One way security screws</li> </ul>          |
| Custom laminates                          | <ul style="list-style-type: none"> <li>Locking hasp (lock not included)</li> </ul> |
| Half doors                                | <ul style="list-style-type: none"> <li>Stainless steel mesh cover</li> </ul>       |
| Special electrical req. (consult factory) | <ul style="list-style-type: none"> <li>Coverless hinges</li> </ul>                 |
| Extra-high (consult factory)              |  |

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### HEATING SYSTEM

Self contained, performance rated "plug" heating system  
 90°F to 180°F temperature range  
 Unique air flow distribution ducts

#### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation  
 Smooth, polished chrome workflow door handles  
 Cam action, lift off hinges  
 Magnetic snap in Santoprene™ door gaskets  
 Cylinder lock in each door  
 Self-closing doors  
 66 ½" high door opening (66 ¼"H rack capacity\*)

#### MODEL FEATURES

Electronic controller with digital display & hi-low alarm  
 Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site  
 Removable stainless steel rack guides  
 Removable stainless steel ramps  
 Reinforced stainless steel floor

\* Racks not supplied

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

APPROVAL:

# Model Specifications

## DIMENSIONAL DATA

|  |                  |
|--|------------------|
| Net Capacity (cubic feet)                      | 64 (1812 cu l)   |
| Width, Overall (inches)                        | 68 1/2 (1740 mm) |
| Depth, Overall (inches)<br>(including handles) | 35 3/8 (899 mm)  |
| Depth (inches) (less doors)                    | 32 (813 mm)      |
| Depth (inches) (doors open 90°)                | 65 (1651 mm)     |
| Clear Door Width (inches)                      | 27 3/8 (695 mm)  |
| Clear Door Height (inches)                     | 66 1/2 (1676 mm) |
| Height, Overall (inches)                       | 86 (2184 mm)     |
| Number of Doors                                | 2                |
| Rack Capacity** (per section)                  | 2                |

## ELECTRICAL DATA



|                                  |              |
|----------------------------------|--------------|
| Voltage                          | 208-230/60/1 |
| Feed Wires (including ground)    | 3            |
| Total Amps (International)       | 13.9 (13.9)  |
| Total Wattage @ 208-230 volts    | 3000         |
| 10 ft. Cord/Plug (International) | No (No)      |

## SHIPPING DATA

|                              |                 |
|------------------------------|-----------------|
| Height - Crated (inches)     | 90 (2286 mm)    |
| Width - Crated (inches)      | 77 (1956 mm)    |
| Depth - Crated (inches)      | 42 (1067 mm)    |
| Volume - Crated (cubic feet) | 168 (4757 cu l) |
| Weight Std - Crated (pounds) | 625 (283 kg)    |
| Weight SS - Crated (pounds)  | 710 (322 kg)    |

\*\* Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

# Model Plan Views

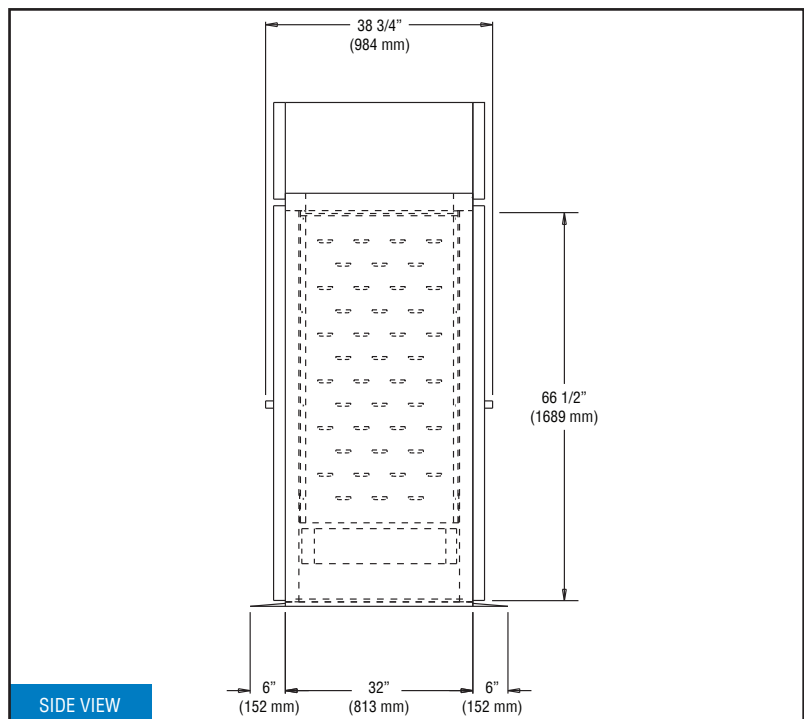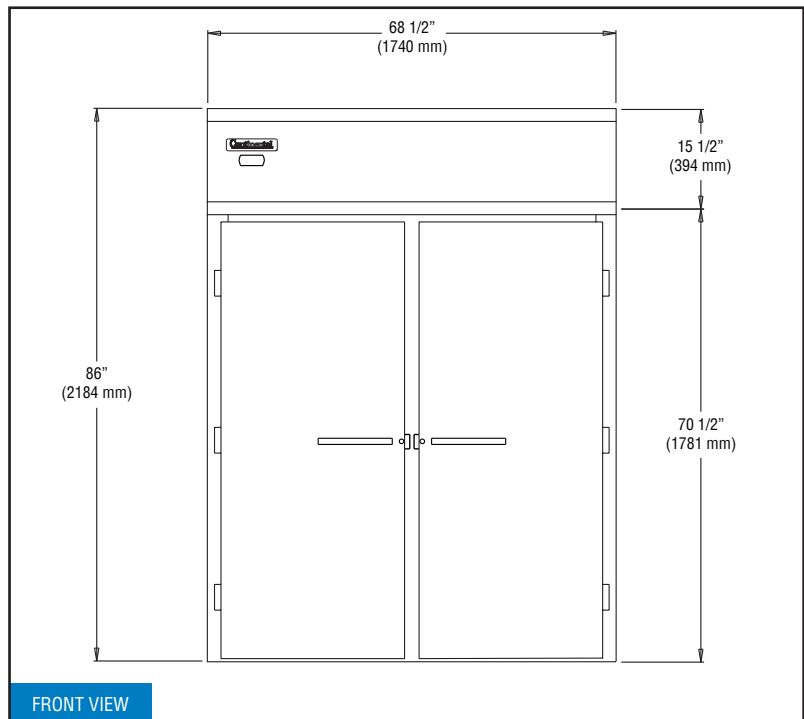

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

