

# ELECTRIC FRYER 2 BASINS 22 L

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0996799

MODELLO  
D9422/10 FRE

SERIE  
DIAMANTE90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

## TECHNICAL SPECIFICATIONS

AISI 18/10 stainless steel tanks with cold zone and foam expansion zone.  
Oil drain taps.  
Oil drip pans on request.  
Safety thermostat (230°C) against excessive oil temperatures.  
IPX5 water jet protection

The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

# ELECTRIC FRYER 2 BASINS 22 L

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0996799

MODELLO  
D9422/10 FRE

SERIE  
DIAMANTE90

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0996799
DEFINITION	D9422/10 FRIG. EL. M80 2V.22+22LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	860 mm
DIM. PRODUCTIVITY	1020 mm
DIM. HEIGHT	870 mm
NET WEIGHT	89,000 Kg
VOLUME (net)	0,763
PACKAGE LENGTH	840,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1170,000 mm
PACKAGE VOLUME	1,003 m3
GROSS PACKING WEIGHT	104,000 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	36,000 kW
VOLTAGE	400
IP GRADE	IPX4
CERTIFIED MODEL	D9422/10 FRE

# ELECTRIC FRYER 2 BASINS 22 L

Project: .....  
 Rev: .....  
 Zone: .....  
 Location: .....




CODICE  
CR0996799

MODELLO  
D9422/10 FRE

SERIE  
DIAMANTE90

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm  
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

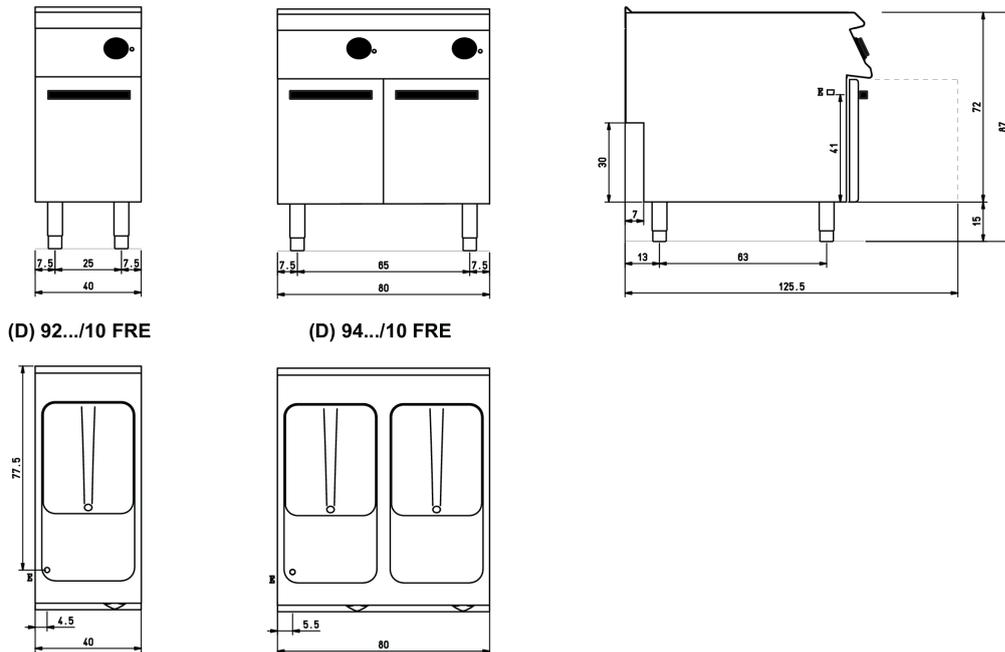

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel

# ELECTRIC FRYER 2 BASINS 22 L

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0996799


MODELLO  
D9422/10 FRE

SERIE  
DIAMANTE90

## Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.

NEW



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



# ELECTRIC FRYER 2 BASINS 22 L

Project: .....  
Rev: .....  
Zone: .....  
Location: .....



CODICE  
CR0996799

MODELLO  
D9422/10 FRE

SERIE  
DIAMANTE90

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1353879	DCF15/17	Basket for tub 15 - 17 litres 1 pcs 24x33,7x12 cm capacity 15-17 litres
CR1353889	DCF15/17P	Small basket for tub 15-17 litres 1 pcs 12x33,7x12 cm capacity 15-17 litres
CR1353929	D9BRO	
BN0221100047	CA 40/10	
BN0221100048	CA 60/10	
CR0592779	ZF4	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment