

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

SHALLOW DEPTH UNDERCOUNTER REFRIGERATOR

UCR20HC Solid Door Refrigerator **Hydrocarbon Series**

MODEL: UCR20HC



*Note: Shown with optional full electronic control

5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, top, door and grille (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Mechanical control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two (2) epoxy-coated steel wire shelves
- Field-reversible door (hinge kit not included)

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel back
- Stainless steel interior
- Full electronic control*
- · Additional shelves
- Shelf clips
- · Glass door option
- · Right or left hinged door
- Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option** (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	UCR20HC	
EXTERNAL DIMENSIONAL DATA		
Width Overall	20"	
Depth Overall with Handle & Bumper	24 ½"	
Height Overall with 6" Casters	31 1⁄8"	
Number of Doors	1	
Depth with Door Open 90°	40 ¾"	
Door Opening	15 %" x 18 ⅓"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	2.34	
Internal Width Overall (in)	16"	
Internal Depth Overall (in)	13"	
Internal Height Overall (in)	19 ½"	
Number of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	2.0	
REFRIGERATION DATA		
Horsepower	1/6	
Capacity (BTU/Hr)	1110	
Heat Rejection (BTU/Hr)	1665	
Charge (lbs/grams/ounces)	0.1323 / 60 / 2.12	
SHIPPING DATA		
Gross Weight - Crated	119 lbs	
Height - Crated	35"	
Width - Crated	23"	
Depth - Crated	26"	

**NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Undercounter Refrigerator - Shallow Depth Model: UCR20HC

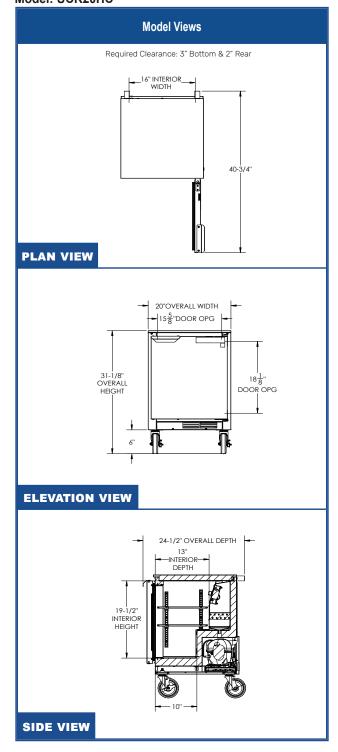

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.

