



HOSHIZAKI

PREMIER KPS 42 SGR

Blast Chiller/Freezer Compatible with Rational Oven SCC101



1 / 1 GN



600 x 400 EN

PRODUCT SERIES: PREMIER KPS

ITEM NUMBER: 875780560

COUNTRY OF ORIGIN: ITALY

PREMIER KPS 42 SGR is a HACCP compliant blast chiller/freezer for 1/1 GN and/or EN 600 x 400mm trays (max of 10). Chilling/freezing capacity of 50/25kg. It features IFR control system and a user friendly 7" touch display. Use the preset programs or store your customized cycles. Adjustable legs (105-150mm).

- Compatible with Rational oven SCC101
- 7" touch display with coloured icons
- Cooling functions: Chilling (soft/hard), freezing (soft/hard), preservation, precooling, infinity
- 'Hot' functions: Thawing, proofing, retarder-prover
- Choose either IFR operation, time or temperature controlled chill/freeze cycle
- Prevent surface freezing damage with the IFR blast chilling function
- Triple-point probe (3 measuring points)
- HACCP: Infinite events up to one year of recording
- Audio-visual HACCP alarms for power failure or if temperature limit is exceeded
- Alarms: Saving up to 40 events
- 10 programs for blast chilling, blast freezing and retarder proving
- Up to 20 customized cycles can be stored
- Automatic shift to 'storage mode' after the chilling process
- Automatic fan cut-out when door is opened
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Automatic defrosting
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or EN 600 x 400mm
- Max. Number of pans: 10
- Internal fan section can be opened for cleaning around / behind unit
- Right hand hinged door
- Full-height integrated handle
- 90° self-closing door system
- Removable magnetic door gasket

COMPATIBLE WITH

Rational oven type SCC101

ACCESSORIES INCLUDED

N/A

OPTIONAL ACCESSORIES

N/A

WARRANTY PERIOD

3 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant: R290 / Refrigerant (kg): 0.3 / CO2 equivalent (kg): 0.9 / GWP: 3

CERTIFICATIONS



Energy consumption - Chilling, kWh/kg (ISO 22042:2021)	Energy Consumption - Freezing, kWh/kg (ISO 22042:2021)
0.078	0.27



HOSHIZAKI

PREMIER KPS 42 SGR

TECHNICAL SPECIFICATIONS


Tray size / Shelf size	Max number of trays / shelves	Temperature Range	Power Supply	Connection Load (Watt)	Ref. capacity at -25°C (Watt)	Climate Class	Sound Level – dB(A)	Chilling capacity (from +70°C to +3°C in 90 minutes) (kg)	Freezing capacity (from +70°C to -18°C in 4 hours) (kg)
1/1 GN	10	-40/+45°C	400V, 3N-/50 Hz	1,800	1,900	5	64	50	25

Distance between guide positions (mm), GN/EN	Dimensions internal (W x D x H) (mm)	Maximum depth of gastro pans (mm), GN/EN	Height from base to first guide (mm)	Height from ceiling to top guide (mm)
530/600	645 x 702 x 780	325/400	61	74,5

SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm)	Dimensions, Packed, W x D x H (mm)	Net Weight (kg)	Weight, Packed (kg)	Volume Packed (m3)
801.5 x 951 x 1737-1782	874 x 990 x 2054	175	200	1.777

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

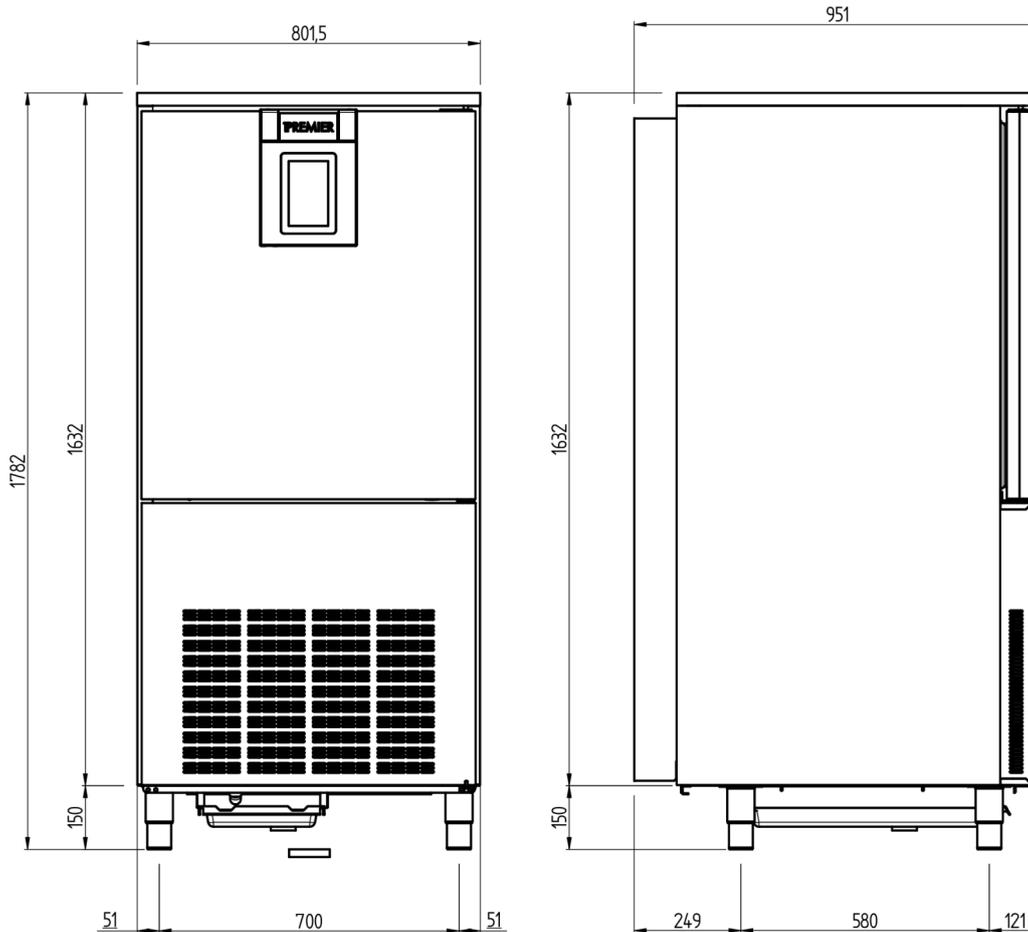

Hoshizaki Belgium
 Hoshizaki Danmark
 Hoshizaki Deutschland
 Hoshizaki France
 Hoshizaki Iberia
 Hoshizaki Italia
 Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
 Hoshizaki Norge salg@hoshizaki.no
 Hoshizaki Sverige orderSE@hoshizaki.dk
 Hoshizaki UK uksales@hoshizaki.uk
 Export countries sales.ex@hoshizaki-europe.com
 Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki.uk