

# FAHEATER

## INDUCTION SKILLET WARMER



### PERFORMANCE

The CookTek® FaHeater Induction Skillet Warmer heats cast iron skillets to sizzling hot in just seconds. It eliminates dependence on dangerous, inconsistent, and energy-inefficient methods.

### FEATURES



- 1800 (U.S. only) and 3500 W models
- Available in 100–120 or 200–240 VAC, single phase
- Max temperature 500 °F (260 °C)
- High-quality internal electronics and heavy-gauge Litz wire
- Easy-to-clean high-temperature glass-ceramic top
- Automatic pan detection allows for instant energy transmission to pan
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Microprocessors continuously monitor vital components for overheating, power-supply issues, and other conditions
- Integral fan keeps internal components cool
- Portable design with stainless-steel housing
- No flames or hot surfaces provide for a safer, cooler kitchen
- Programmable – three preset timers (25, 45, and 70 seconds) with the option to adjust timers to allow for different-sized skillets and/or skillet-served products (max 120 seconds)

### STANDARD INCLUDED ACCESSORIES

- 6-ft (1.8 m) nominal plug and cord
- Two-year advanced replacement warranty (U.S. and Canada)

\*Induction cooking requires the use of induction-compatible (i.e., magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to substitute components or change specifications without prior notice.

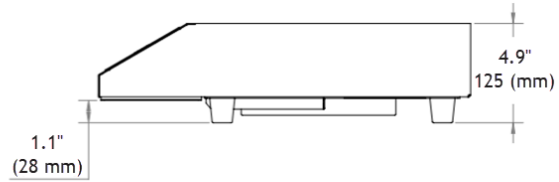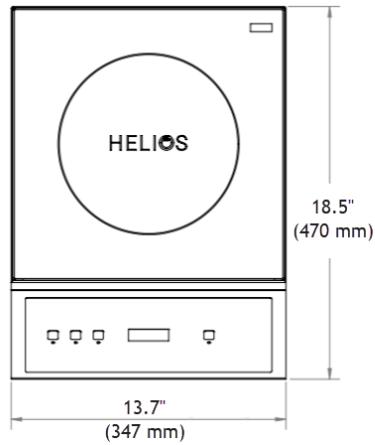

### DIMENSIONS

Full Unit Height	4.9"	125 mm
Housing Height	3.73"	95 mm
Full Unit Width	13.7"	347 mm
Full Unit Depth	18.5"	470 mm
Feet Height	1.1"	28 mm
Weight	17.75 lb	8.0 kg
Max Ambient Temperature	122 °F	50 °C
<b>WALL CLEARANCE</b>		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

### SHIPPING INFORMATION

Packaged Height	10"	254 mm
Packaged Width	19"	483 mm
Packaged Depth	21"	533 mm
Packaged Weight	21 lb	9.5 kg
Item Class	250 NMFC #26710	

### ELECTRICAL SPECIFICATIONS MODEL MCF100

<b>UNITED STATES/CANADA</b>		
HRF-9500-FA18-1	100–120 VAC, 50/60 Hz, 15 A, 1800 W	NEMA 5-20P

### ELECTRICAL SPECIFICATIONS MODEL MCF200

<b>UNITED STATES/CANADA</b>		
HRF-9500-FA35-1	200–240 VAC, 50/60 Hz, 3500 W	NEMA 6-20P
<b>UK/MIDDLE EAST</b>		
HRF-9500-FA35-2	200–240 VAC, 50/60 Hz, 3500 W, 16A	IEC 309
<b>INTERNATIONAL</b>		
HRF-9500-FA35-3	200–240 VAC, 50/60 Hz, 3500 W, 16A	CEE 7/7 Schuko
<b>AUSTRALIA</b>		
HRF-9500-FA35-4	200–240 VAC, 50/60 Hz, 3500 W, 15A	AS/NZS 3112:2000
<b>SOUTH AFRICA</b>		
HRF-9500-FA35-7	200–240 VAC, 50/60 Hz, 3500 W, 16A	BS 546
<b>ISRAEL</b>		
HRF-9500-FA35-8	200–240 VAC, 50/60 Hz, 3500 W, 16A	SI 32

⚠️ Dedicated circuit required for each installation

