


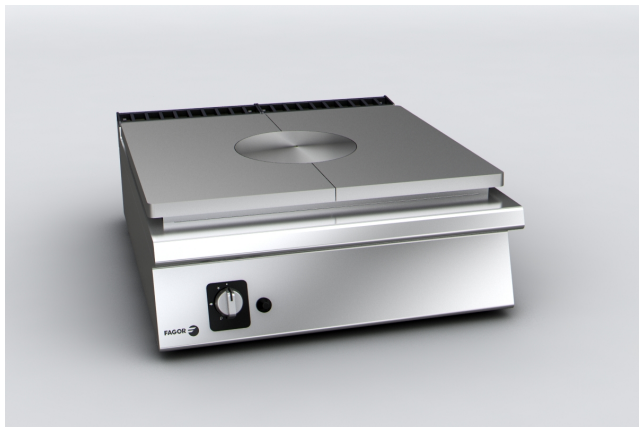

Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
C-G910 NG

19075518

11/11/2021

DENOMINATION:

Countertop gas solid top GN, 900 range.

DESCRIPTION :


- "- Inbuilt surface tops manufactured in 2 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishes. Screws hidden from view.
- 10 mm thick cast iron plate with rounded corners. 300 mm diameter surface.
- Refractory brick with cast iron shield inside to take better advantage of the heat and distribute it better.
- Temperatures for differentiated use: 500 °C at the centre and 200 °C near the edges.
- Low consumption pilot and thermocouple.
- Gas conduction in flexible stainless steel tube, making internal manipulation easier and facilitating any repair work.
- Controls set on a protective base with system against water infiltration.
- High temperature enamelled cast iron flue protector aligned with the hobs, facilitating manoeuvrability and support of the containers, increasing the useful surface area.
- Access to the components from the front."

POSSIBLE ACCESSORIES :

- STANDS 900
- REFRIGERATED STANDS
- ACCESSORIES KORE
- COOKER ACCESSORIES KORE
- TALL CHIMNEY KORE

DIMENSIONS

X Width	800 mm	X Gross width	840 mm
Y Depth	930 mm	Y Gross depth	1022 mm
Z Height	290 mm	Z Gross height	535 mm
Net Weight	143,0 kg	Gross Weight	155,0 kg
Net volume	0,220 m3	Gross volume	0,459 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage	N/A
Electric frequency	N/A

GAS TECHNICAL SPECIFICATIONS

Gas type	NG
Gas power	11,50 kW
Gas consumption	1,150 m3/h
Regulated	NG G20/G25/G25.1 20/25/25 mbar

CONNECTIONS TECHNICAL SPECIFICATIONS

Gas diameter 1	R3/4"
----------------	-------

Catalogue
FOOD SERVICE


Capítulo
COOKING

Modelo
C-G910 NG


19075518

11/11/2021

C-G910

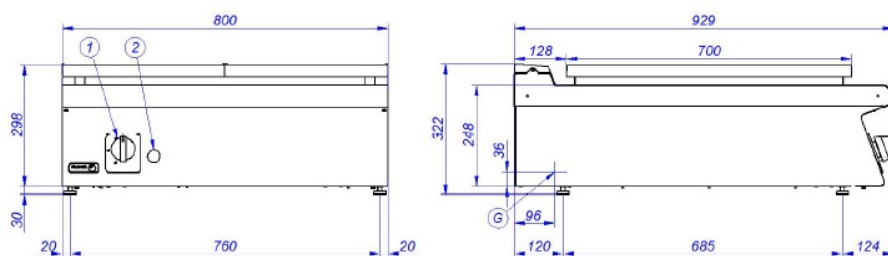

C-G911

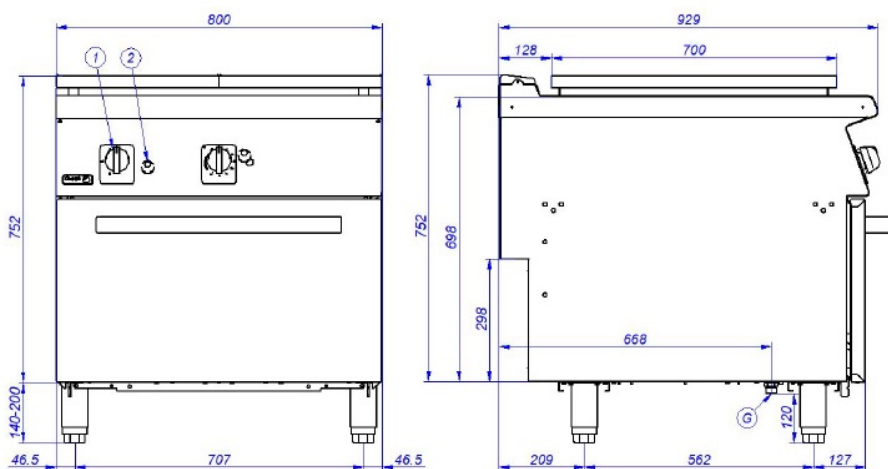

G. Entrada de Gas
1. Válvula de gas
2. Pulsador tren de chispas
3. Mando H

Gas Inlet
Gas valve
Piezoelectric ignitor
H control