

ALUMINUM RACKS**Transport 18"x 26" Trays, 12"x 20" Pans, and Oval Trays****"OTR" SERIES*****Economical and functional aluminum racks for transport, bussing, and storage***

- 1** Choose from a variety of versatile aluminum racks to accommodate your specific needs
- 2** Fabricated from high tensile extruded aluminum with all welded, tubular construction, these racks provide sturdy, light-weight, and economical storage and transport
- 3** 5" heavy-duty, non-marking polyurethane casters for easy maneuverability even when fully loaded
- 4** These racks are easy to clean and can be completely sanitized, washed, or steam cleaned while remaining rust resistant
- 5** Save significant kitchen space by organizing all various trays and/or pans in one convenient location
- 6** Facilitates proper cooling of freshly baked goods

**1**

Fixed Rack
18"x 26" Trays

Universal Fixed Rack
18"x 26" Trays, 12"x 20" Pans

Universal Adjustable Rack
18"x 26" (and Oval) Trays, 12"x 20" Pans

Wide Angle Universal Fixed Rack
Oval and 18"x 26" Trays, 12"x 20" Pans

1

Versatile Holding

2

All Welded Tubular Design

3

5" Polyurethane Casters


4

Rust Resistant


****Two year limited warranty*****ALUMINUM**

SPECIFICATIONS

ALUMINUM RACKS

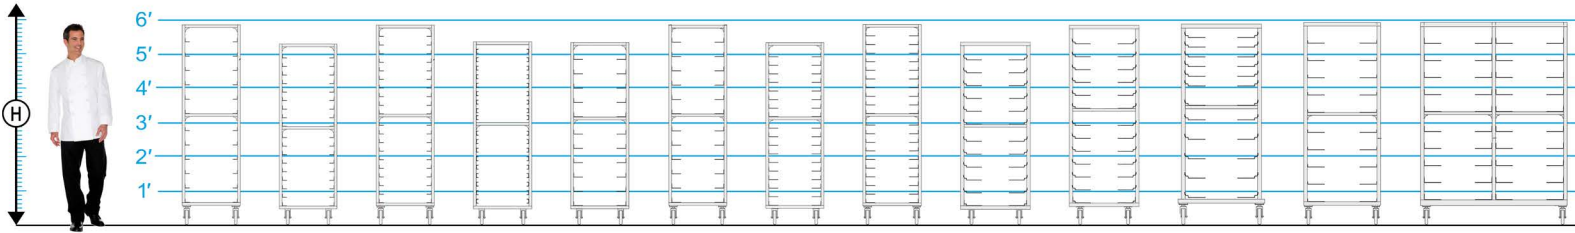

MODEL NUMBER	CAPACITIES			TRAY SLIDE SPACINGS (mm)	TRAY GUIDE LEDGE SIZE (mm)	OVERALL EXTERIOR DIMENSIONS IN.(mm) (Height Includes Casters)			CONSULT FACTORY FOR SHIPPING CLASS	
	NUMBER OF TRAYS / PANS					HIGH "H"	DEEP "D"	WIDE "W"	CASTER SIZE	SHIP WT . LBS. (KG)
	18 x 26	12 x 20	OVAL							
18"x 26" RACKS - FIXED SPACINGS										
	12	-	-	5" (127)	1.875" (48)	69.75" (1772)	26" (661)	20.5" (521)	5"	125 (57)
	18	-	-	3" (76)	1.875" (48)	63.75" (1610)	26" (661)	20.5" (521)	5"	130 (59)
	20	-	-	3" (76)	1.875" (48)	69.75" (1772)	26" (661)	20.5" (521)	5"	135 (62)
	34	-	-	1.5" (38)	1.5" (38)	64.5" (1626)	26" (661)	20.75" (528)	5"	140 (64)
18"x 26" AND 12"x 20" RACKS - FIXED SPACINGS										
	11	11	-	5" (127)	3.125" (79)	64" (1772)	26" (661)	20.5" (528)	5"	110 (50)
	12	12	-	5" (127)	3.125" (79)	69.75" (1772)	26" (661)	20.5" (528)	5"	120 (55)
	18	18	-	3" (76)	3.125" (79)	64" (1772)	26" (661)	20.5" (528)	5"	115 (13)
	20	20	-	3" (76)	3.125" (79)	69.75" (1772)	26" (661)	20.5" (528)	5"	130 (59)
UNIVERSAL RACKS - ADJUSTABLE ON 1.5" SPACINGS										
	12	24	12	4.5" (114)	6.125" (156)	64" (1772)	26" (661)	24.5" (623)	5"	120 (55)
	13	26	13	4.5" (114)	6.125" (156)	69.5" (1766)	26" (661)	24.5" (623)	5"	145 (66)
	12	24	12	4.5" (114)	6.125" (156)	69.75" (1545)	26" (661)	25" (635)	5"	150 (69)
OVAL TRAY RACKS - WIDE ANGLE FIXED SPACINGS										
	10	20	10	6" (152)	6.75" (171)	71.25" (1810)	30" (762)	26.5" (674)	5"	155 (71)
	20	40	20	6" (152)	6.75" (171)	71.25" (1810)	30" (762)	51.75" (1315)	5"	220 (100)



CONSTRUCTION. Heavy-duty extruded type 6063 aluminum alloy. All uprights and runners are fully welded.

CASTERS. 5" durable, non-marking, easy rolling, all swivel, polyurethane tire casters with 1.5" wheel shall be bolted to heavy-duty stress plate that is welded to the tubular frame.

TRAY GUIDES. Fixed rack tray slides (OTR-1826, OTR-FUA, and OTR-OT) are welded to the uprights. OTR-UA tray guides are adjustable on 1.5" spacings. Spacings and ledge size vary in dimensions for intent of purpose and are indicated on the chart above.

CASTERS

2 (two) rigid casters
2 (two) casters with brakes
4" high-temp casters (-20°F - 425°F)

EXTRAS

Rear pan stop
8" vertical bumpers
Perimeter bumper
Solid base