

Synergy Refrigerated Display Deli

Product Group: **Synergy Drop-ins Refrigerated**
 Range:
 Sub Range:
 Product Name: **Display Deli**
 Part Number: **DRDL**
 Victor Computer Code: **DRDLY**
 Price List Page: **Synergy 5**

Electrical Connection
 220V/240V, 1 phase, 50 Hz.

Refrigerant
 R404a CFC free refrigerant

Cable
 Units fitted with 2 metres of cable and 13 amp plug.

Construction
 Top: Stainless Steel, Exterior: Stainless Steel,
 Interior: Stainless Steel

Designed for assisted service. With rear preparation shelf.


- Gantry Features**
- Constructed from 50mm diameter, bright polished stainless steel tube.
 - Fluorescent illumination to stainless steel light box.
 - Toughened glass curved front screen and over shelf hinged for easy cleaning.
 - Glass side cheeks.
 - One ambient glass mid-shelf
 - Digital temperature control and readout.

- Well Features**
- 304 Stainless steel well - 170mm deep
 - Load line indicator at 100mm to assist in the safe presentation of food
 - Accepts GN1/1 gastronorm containers up to 100mm deep.
 - Completely removable well giving easy access for cleaning and maintenance.

- Extras**
- Polyethylene cutting board 600 x 250 x 40mm - Fits over rear preparation shelf.



Operating conditions
 Designed to comply with the operating requirements of EN ISO 23953 - 2:2005
 Performance level M1 (-1°C to + 5°C) in Climate class 3 (25°C, 60%RH,0.2m/s) and
 Performance level M2 (-1°C to + 7°C) in Climate class 4 (30°C, 55%RH,0.2m/s)

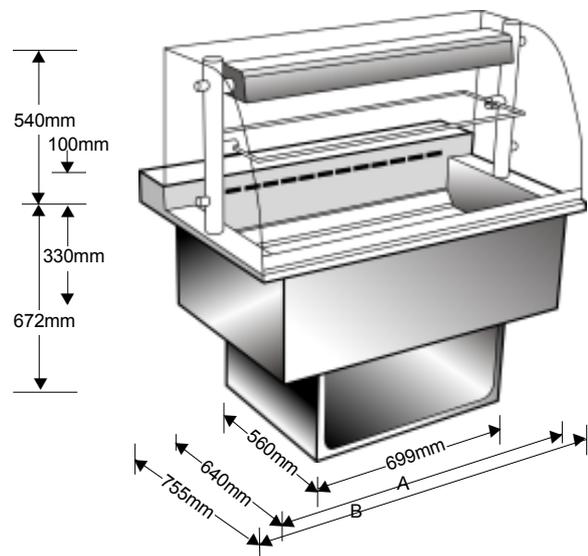

| ProductGN1/1 | Part Capacity | cut out Number | top size(mm) size (mm) | power | | Approx. (W) | weight (kg) |
|----------------------|---------------|----------------|------------------------|--------|------------------|-------------|-------------|
| | | | | length | width x height | | |
| Chilled Display Deli | 2 | DRDL 2 | 725 x 646 | A | B | 1600 | 105 |
| | 3 | DRDL 3 | 1045 x 646 | 708 | 850 x 755 x 540 | 1600 | 140 |
| | 4 | DRDL 4 | 1370 x 646 | 1036 | 1177 x 755 x 540 | 2100 | 175 |