

## Culino 40E Static Jacketed Kettle

Model – Culino 40E (4215202)

### STANDARD FEATURES

- Culino static jacketed kettle
- Electric heated version
- 316 Stainless steel bowl
- Flat panel digital controls
- Food temperature control (option)
- Multifunction timer (option)
- Automatic measured water filling (option)
- Electric tilting
- Measuring stick
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories




### TECHNICAL DATA

|              |            |             |                   |
|--------------|------------|-------------|-------------------|
| Net Volume   | 40L        | Electrical  | Power 12 kW       |
| Spare Volume | 8 L        |             | Voltage 400-415V, |
| Gross Volume | 48 L       |             | 3P+N+E 50/60Hz    |
| Dimensions   |            |             | AMP 20A           |
| Width        | 1047mm     | Total Heat  | 12kW              |
| Height       | 1039mm     | Load        | Latent 0.4 kW,    |
| Depth        | 743mm      |             | Sensible 1.9 kW   |
| Connections  |            | Waste       | By kitchen        |
| Water        | Cold ø15mm |             | contractor        |
|              | Hot ø10mm  | Nett Weight | 169 kg            |

NOTE - Mandatory installation kit required for all installations, options are:

- Single kettle surface – 4215837
- Single kettle subsurface – 4215838
- Group kettle surface – 4215845
- Group kettle subsurface - 4215846

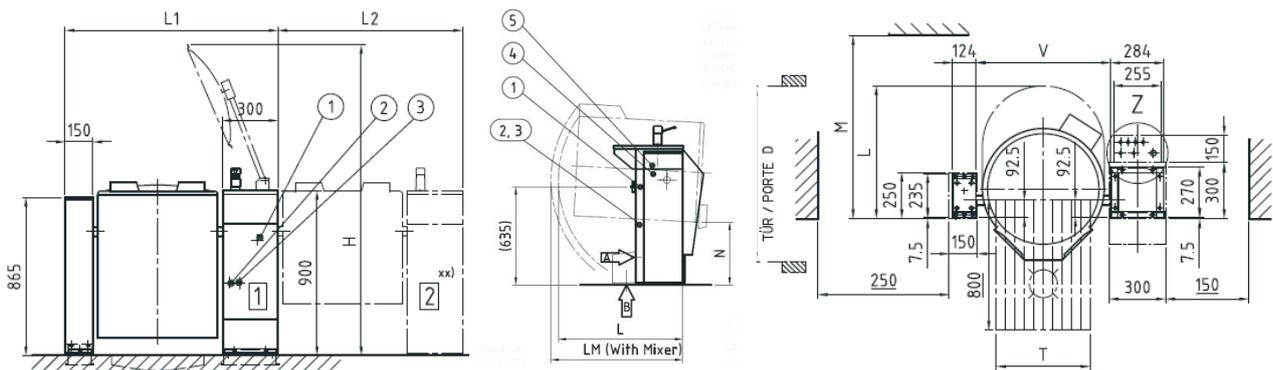

Finland  
metos.com/manufacturing

Metos Oy Ab  
Ahjonkaarre  
FI 04220 Kerava  
Finland  
Telephone +358 204 3913  
international.sales@metos.com

- (1) Electrical connection
- (2) Cold water connection
- (3) Hot water connection
- (4) Data cable (HACCP option)
- (5) Control cables to building for heating control of kettle

| Model | L1 mm | L2 mm | M mm | L mm | LM mm | H mm | T mm | D mm | N mm | V mm |
|-------|-------|-------|------|------|-------|------|------|------|------|------|
| 40E   | 1047  | 897   | 900  | 630  | 730   | 1710 | 400  | 730  | 455  | 613  |

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.