

50 LITRE DIRECT GAS COOKER

Project:
Rev.:
Zone:
Location:



CODICE
CR0991049

MODELLO
D93/10PGD05

SERIE
DIAMANTE90



GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. External coatings and feet in stainless steel with Scotch Brite finish. Working table height adjustable from 840 to 900 mm. Range modularity: 200-400-600-800-1200. Wide range of accessories.

TECHNICAL SPECIFICATIONS

AISI 304 stainless steel tanks with AISI 316 bottom.
Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.
Frontal drain by means of 2" chrome-plated brass faucet.
Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).
Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.
Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

Possibility of hot or cold water loading

Stainless steel tank with aisi 316 bottom

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

50 LITRE DIRECT GAS COOKER

Project:
Rev:
Zone:
Location:



CODICE
CR0991049

MODELLO
D93/10PGD05

SERIE
DIAMANTE90

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0991049
DEFINITION	D93/10 PGD05 GAS COOKER DIR.M60 50LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	MIXED
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	154,800 Kg
VOLUME (net)	0,470
PACKAGE LENGTH	860,000 mm
PACKAGE WIDTH	1020,000 mm
PACKAGING HEIGHT	1270,000 mm
PACKAGE VOLUME	1,114 m3
GROSS PACKING WEIGHT	170,000 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0,015 kW
GAS POWER	10,50
GAS POWER (G25.3/25mbar)	10,00
IP GRADE	IPX5
CERTIFIED MODEL	D93/10 PGD05

50 LITRE DIRECT GAS COOKER

Project:
 Rev:
 Zone:
 Location:


CODICE
CR0991049

MODELLO
D93/10PGD05


SERIE
DIAMANTE90

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

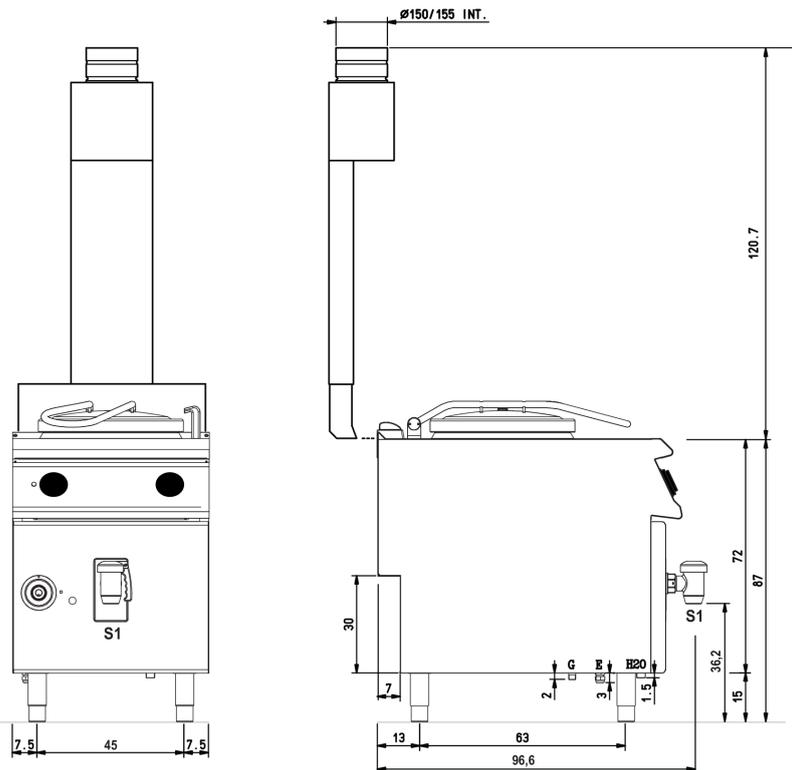

(D) 93/10 PGD05

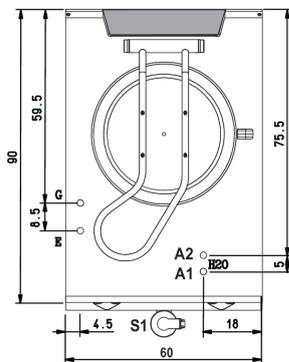

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacchi arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
- A1 =** Calda - Heiss - Warm - Chaude - Caliente - Warm
- A2 =** Fredda - Kalt - Cold - Froid - Fria - Koude
- EN ISO 228-1 G 3/4**
- E** Pressacavo entrata linea elettrica
 Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable
 Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection -
 Arrivée gaz - Union de gas - Gasaansluiting
- EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)**
- S1** Scarico acqua - Wasserablauf - Water outlet
 Vidange de l'eau - Desaguadero
 Wateraftapaansluiting

50 LITRE DIRECT GAS COOKER

Project:
Rev:
Zone:
Location:



CODICE
CR0991049

MODELLO
D93/10PGD05

SERIE
DIAMANTE90

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

Possibility of hot or cold water loading



Stainless steel tank with aisi 316 bottom



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



50 LITRE DIRECT GAS COOKER

Project:
Rev:
Zone:
Location:



CODICE
CR0991049

MODELLO
D93/10PGD05

SERIE
DIAMANTE90

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	
MA97348000	9CV5	
MA97350900	9C10	
MA97351000	9C15	
MA97352000	9CV10	
MA97353000	9CV15	
MA97349000	9-I5	
MA97354000	9-I10	
MA97355000	9-I15	
CR0592789	ZF6	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	