

| PROJECT: |         |      |
|----------|---------|------|
| ITEM #   |         | QTY: |
| MODEL#   |         |      |
| AIA #    | _ SIS # |      |

## **VICTORY ELITE™ TOP MOUNT REFRIGERATOR**

VERSA-2D-HD-HC



### **EXCLUSIVE WARRANTY**

- 7 Year Parts, Labor and Compressor
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ► Lifetime Warranty On Handles & Hinges (parts only)



### **CABINET CONSTRUCTION**

- · Stainless Steel Front, Gray Coated Sides
- · Aluminum Interior
- · Snap-In, Magnetic Door Gasket(s)
- · Heavy Duty Cam Lift Hinges
- · Stay-Open Door Feature For Easy Product Loading
- Required Clearance Is 12" Top, 3" Rear And 0" Sides
- · 6" Casters
- · 8' Cord And Plug

### **FEATURES**

- High Performance Refrigeration System With An Electronic Control
- · Expansion Valve Technology
- · Energy Efficient LED Lighting
- 6 Heavy Duty Epoxy Coated Shelves

### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Refrigerator Capable Of Maintaining Product Temperature Between 36°F And 38°F



Please Verify Qualifying Units By Visiting: www.energystar.gov/cfs

# CUL SING KCI AQ

### **OPTIONS & ACCESSORIES**

- · Stainless Steel Back
- · Stainless Steel Breaker Caps
- · Stainless Steel Exterior
- · Tray Slides
- Stainless Steel Interior 3" Casters Or 6" Legs
  (no charge at time of order)
- Seismic/Flanged Legs
- Additional Shelves: Heavy Duty Epoxy Coated Chrome Plated Or Stainless Steel
- Remote Models\* (6" legs only) (refrigerant must be specified at time of order, see note)

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 fax: (800) 253-5168


Rev. 10/7/24 Printed in U.S.A.


APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_




### **VERSA-2D-HD-HC**





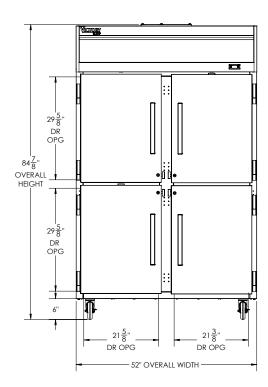

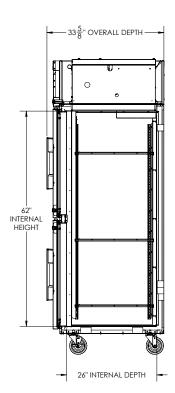

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements,  $additions\ or\ replacements\ for\ previously\ purchased\ equipment.\ Dimensional\ tolerances\ +/-\ 1/4".\ Metric\ dimensions\ (MM)$ 

### 12" Top clearance is required

| CHARACTERISTICS               |                   | ELECTRICAL DATA                |                    | SHIPPING DETAILS   |         |
|-------------------------------|-------------------|--------------------------------|--------------------|--|---------|
| Net Capacity (cubic ft.)      | 45.2              | Cabinet Voltage**              | 115/60/1           | Height   | 88"     |
| Width, Overall (in.)          | 52"               | Total Amperes                  | 6.0                | Width  | 54"     |
| Depth, Overall (with handles) | 33 5/8"           | NEMA Plug (8' cord)            | 5-15P              | Depth  | 37"     |
| Height Overall (6" casters)   | 84 7/8"           | REFRIGERATION DATA             |                    | Crated Weight  | 498 lbs |
| Depth, Door Open 90°          | 55 1/8"           | Condensing Unit Size, HP       | 1/3                | *NOTE: Remote units are field<br>wired and comes with 6" legs.<br>Refrigerant must be specified at |         |
| Door Openings (in.)           | 21 5/8" x 29 5/8" | Refrigerant                    | R290               |  |         |
| No. Of Doors/Shelves          | 4/6               | Capacity (BTU/HR) (100°F/20°F) | 2800               |  |         |
|                               |                   | Heat Rejection (BTU/HR)        | 4200               | time of order.   |         |
|                               |                   | Charge (lbs/grams/ounces)      | 0.3307 / 150 / 5.3 |  |         |

<sup>\*\*</sup> NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Victory recommends using either an Eaton, SCF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Rev. 10/7/24 Printed in U.S.A.

