

## INDUCTION - 10kw - Top version

CODICE  
CR1358199

MODELLO  
D72/10TCII

SERIE  
DIAMANTE 70



### GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200. Wide range of accessories.

### TECHNICAL SPECIFICATIONS

■ Unbreakable glass-ceramic top. ■ Serigraphs identifying cooking zones. ■ Safety sensor to prevent overheating. ■ Power adjustable to 12 levels ■ Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically switches the heating on/off, and a device against overheating.

■ Ensures the correct positioning and suitability of the pot ■ Power adjustable to 12 levels ■ Professional components tested to withstand intensive use over time ■ Safety sensor to prevent overheating. ■ Cooking zones with 5KW power ■ Mechanically controlled induction ready for IOT connection to Cloud ■ Serigraphs identifying cooking zones.

CODICE  
 CR1358199

 MODELLO  
 D72/10TCII

 SERIE  
 DIAMANTE 70

### Technical Information

SPECIFICATION	DATA
<b>MATERIAL</b>	<b>CR1358199</b>
DEFINITION	D72/10 TCII INDUZIONE M40 TOP
<b>COMMERCIAL LINE</b>	<b>DIAMANTE</b>
SUPPLY	ELECTRICS
<b>DIM. WIDTH</b>	<b>400 mm</b>
DIM. PRODUCTIVITY	730 mm
<b>DIM. HEIGHT</b>	<b>250 mm</b>
NET WEIGHT	28 Kg
<b>VOLUME (net)</b>	<b>0,073</b>
PACKAGE LENGTH	440,000 mm
<b>PACKAGE WIDTH</b>	<b>850,000 mm</b>
PACKAGING HEIGHT	550,000 mm
<b>PACKAGE VOLUME</b>	<b>0,206 m3</b>
GROSS PACKING WEIGHT	34 Kg
<b>STANDARD POWER SUPPLY</b>	<b>380-415V 3</b>
FREQUENCY	50/60 Hz
<b>ELECTRICAL POWER</b>	<b>10 kW</b>
IP GRADE	IPX5
<b>CERTIFIED MODEL</b>	<b>D72/10TCII</b>


CODICE  
CR1358199

MODELLO  
D72/10TCII

SERIE  
DIAMANTE 70

**SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESHEMA - IINSTALLATIONSRIJNINGAR**

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

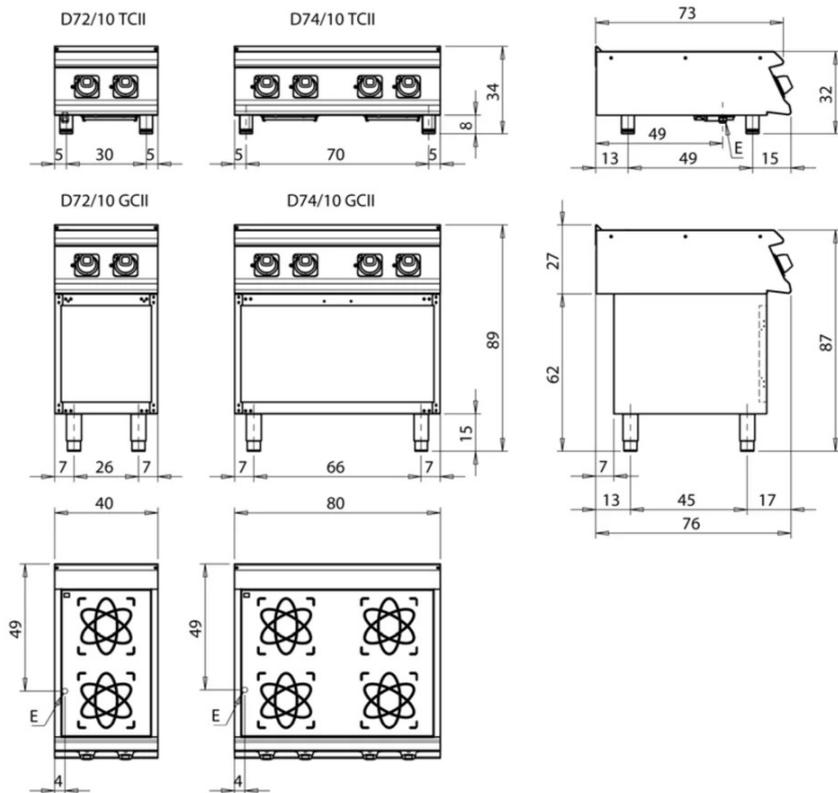

**Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda**

<p><b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico</p>	<p><b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás</p>
<p><b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água</p>	<p><b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água</p>
<p><b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba</p>	<p><b>A1</b> = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno <b>A2</b> = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio</p>
<p><b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão</p>	<p><b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nivel</p>
<p><b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto</p>	
<p><b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno</p>	

# INDUCTION - 10kw - Top version

CODICE  
CR1358199

MODELLO  
D72/10TCII

SERIE  
DIAMANTE 70



Power adjustable to 12 levels




Mechanically controlled induction  
ready for IOT connection to Cloud



Professional components tested to  
withstand intensive use over time



Safety sensor to prevent overheating.



Cooking zones with 5KW power

CODICE  
CR1358199

MODELLO  
D72/10TCII

SERIE  
DIAMANTE 70

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1354789	D72/10B	Open base 40cm Series 70
CR0996979	DBVP4	Diamond door 39.5x3.6x46.5 cm for 40 cm compartments
CR0997009	DBVPA4	Accessory Diamond door 39.5x3.6x46.5 cm for 40 cm compartments
CR0997029	DAPC	Accessories for accessory diamond knife holder
CR0997019	DAPD	Accessories for Diamond door accessories
CR0997039	DAPS	Accessories for diamond spice rack
CR0997049	DAPM	Accessories for accessory Diamond door
CR0997059	DAPDB	Accessories for accessory Diamond door/bottle holders
CR1353589	DBVC4	Drawer kit 39.5x56x46.5 cm for compartments of 40