



# DISHWASHER SRC-3300DS90EV 400/50/3N

122/183 baskets per hour (up to 3.300 plates/hour)



1302609



WARE WASHING  
RACK CONVEYOR DISHWASHERS

## SALES DESCRIPTION

Enhanced washing + double rinsing.  
2 speeds.

- ✓ Fully stainless steel jacket.
- ✓ Inlet and outlet splash guards are standard.
- ✓ Stainless steel central rack feed system.
- ✓ Process cycles are divided by rubber curtains.
- ✓ Automatic cycle start.

### Economy

- ✓ Energy saving rinse supply switch.
- ✓ Pressure controller in the rinse section to limit consumption.
- ✓ Programmed automatic stops if there is no loading.
- ✓ Stop and freezing of timer when the limit switch actuates.

### Cleaning and maintenance

- ✓ Wide pivoting door allowing access for cleaning or inspection purpose.
- ✓ Detachable arms and dispersers for easier cleaning.
- ✓ Sloped removable stainless steel filters with independent removable basket.
- ✓ Easy boiler emptying by loosening a hose.
- ✓ Failures are easily detected thanks to the warning lights.
- ✓ Easy to repair without moving the machine.

### Washing

- ✓ Stainless steel wash arms and deep-drawn dispersers.
- ✓ Efficient and durable wash arm dispersers.
- ✓ Powerful, self-draining vertical wash pump.
- ✓ Easy to install detergent dispenser intake in washing tank. Rinsing

### Rinsing

- ✓ Stainless steel rinse arms and powerful, stainless steel, deep-drawn dispersers.
- ✓ Automatic boiler filling with no failure risk for heating elements.
- ✓ Temperature control with high precision probes.
- ✓ Visualization and adjustment of washing and rinsing temperatures in the digital display by pressing a button.
- ✓ Easy to install rinse aid dispenser intake in boiler.

### INCLUDES

- ✓ Inlet and outlet splash guards are standard.

### ACCESSORIES

- Drying units
- Manual water softeners
- Automatic water softeners
- 500 x 500 mm. baskets
- Inserts, supplements & similar
- Loading table for corner situation for rack conveyor dishwashers
- Central sorting tables
- Double connection central sorting table
- Single exit tables
- Roller conveyor and corner roller conveyor
- Machined curve
- CA Extraction hood
- EV Extraction hood with motor
- CV Extraction hood with steam condensation
- Connecting tables for Pass-Through dishwashers and rack conveyors
- Drying unit for corner situation



[www.sammic.co.uk](http://www.sammic.co.uk)

Food Service Equipment Manufacturer

Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester

[uksales@sammic.com](mailto:uksales@sammic.com)  
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet  
updated 07/10/2020



# DISHWASHER SRC-3300DS90EV 400/50/3N

122/183 baskets per hour (up to 3.300 plates/hour)



1302609

## SPECIFICATIONS

### Production

- ✓ Production baskets/hour: 122 / 183
- ✓ Production plates/hour: 2196 / 3294

### Wash

- ✓ Temperature: 55 °C - 65 °C
- ✓ Wash tank capacity: 100 l
- ✓ Pump: 3.5 Hp / 2600 W
- ✓ Wash heating element: 9000 W

### Pre-rinse

- ✓ Temperature: 65 °C - 75 °C
- ✓ Pre-rinse basin capacity: 15 l
- ✓ Pump: 0.2 Hp / 150 W
- ✓ Pre-rinse heating element: 6000 W

### Rinse

- ✓ Temperature: 80 °C - 90 °C
- ✓ Water consumption: 330 l/h
- ✓ Rinse heating element: 18000 W
- ✓ Boiler capacity: 20 l

### Drag

- ✓ Drag motor power: 0.25 Hp / 180 W

### Drying

- ✓ Air flow: -- m<sup>3</sup>/h
- ✓ Fan power: -- Hp / -- W
- ✓ Dryer heater element: -- W

### Mist extractor

- ✓ Ev output diameter: -- mm
- ✓ Mist extractor power: -- Hp / -- W

### Loading

- ✓ Total installed power: 30270 W

**Electrical supply:** -- V / -- Hz / -- ~ ( -- A)

### External dimensions (WxDxH)

- ✓ Width: 2300 mm
- ✓ Depth: 829 mm
- ✓ Height: 1520 mm

**Net weight:** 410 Kg



**Water Intake:** 3/4 "

**Drain diameter:** 1 1/2 "

**Noise level (1m.):** 71 dB(A)

### Crated dimensions

3070 x 980 x 2100 mm

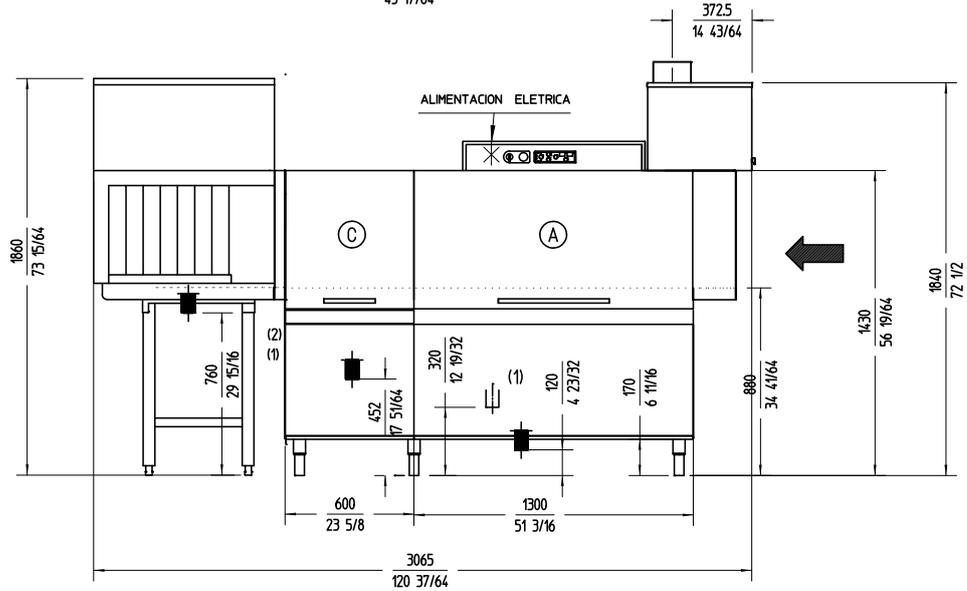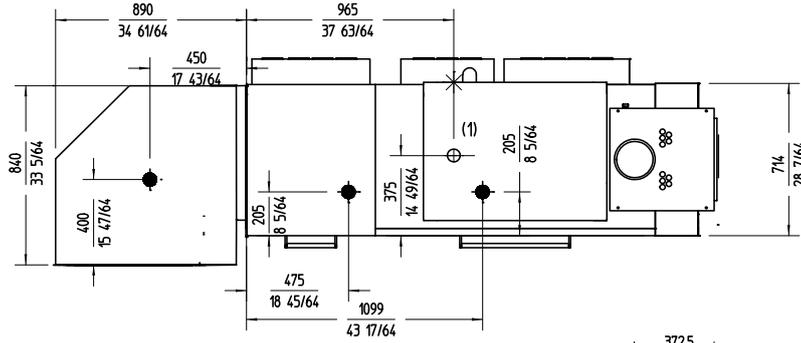

WARE WASHING  
RACK CONVEYOR DISHWASHERS



[www.sammic.co.uk](http://www.sammic.co.uk)

Food Service Equipment Manufacturer

Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester

[uksales@sammic.com](mailto:uksales@sammic.com)  
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet  
updated 07/10/2020