

GAS PASTA COOKER 1 BOWL 40 L

Project:
Rev:
Zone:
Location:



CODICE
CR0990029

MODELLO
D73/10CPG

SERIE
DIAMANTE70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

Safety pressure switch to prevent activation of heating without water in the tank.

Water loading by means of solenoid valve.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained in specific tests, the knobs and under-knobs can be washed, without compromising functionality and safety.

GAS PASTA COOKER 1 BOWL 40 L

Project:
Rev:
Zone:
Location:



CODICE
CR0990029

MODELLO
D73/10CPG

SERIE
DIAMANTE70

Technical Information

| SPECIFICATION | DATA |
|--------------------------|---|
| MATERIAL | CR0990029 |
| DEFINITION | D73/10 CPG GAS PASTA COOKER M60 1V.42LT |
| COMMERCIAL LINE | DIAMANTE |
| SUPPLY | MIXED |
| DIM. WIDTH | 600 mm |
| DIM. PRODUCTIVITY | 730 mm |
| DIM. HEIGHT | 870 mm |
| NET WEIGHT | 76,800 Kg |
| VOLUME (net) | 0,381 |
| PACKAGE LENGTH | 660,000 mm |
| PACKAGE WIDTH | 850,000 mm |
| PACKAGING HEIGHT | 1150,000 mm |
| PACKAGE VOLUME | 0,645 m3 |
| GROSS PACKING WEIGHT | 89,000 Kg |
| STANDARD POWER SUPPLY | 220-240V 1N |
| FREQUENCY | 50 Hz |
| ELECTRICAL POWER | 0,015 kW |
| GAS POWER | 14,00 |
| GAS POWER (G25.3/25mbar) | 13,50 |
| VOLTAGE | 230 |
| IP GRADE | IPX5 |
| CERTIFIED MODEL | D73/10 CPG |

GAS PASTA COOKER 1 BOWL 40 L

Project:
 Rev:
 Zone:
 Location:


CODICE
 CR0990029

MODELLO
 D73/10CPG

SERIE
 DIAMANTE70

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

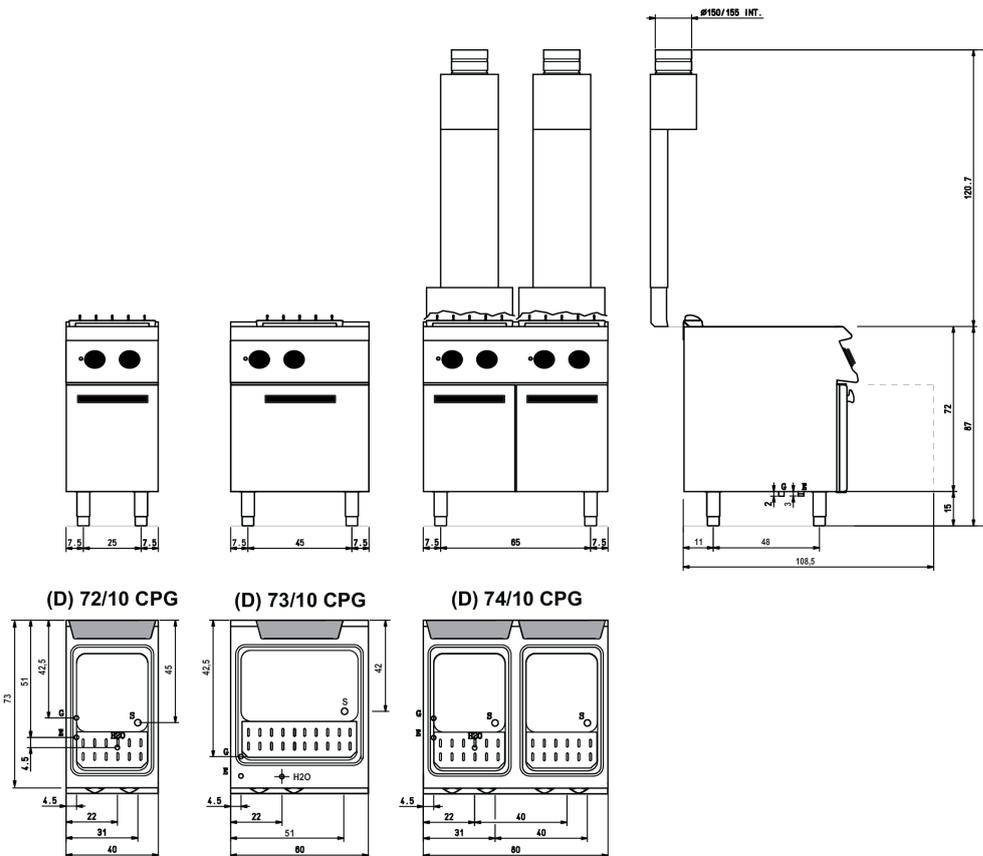

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet
 Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4
- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- G** Attacco arrivo gas - Gasanschluss - Gas connection
 Arrivée gaz - Union de gas - Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- S** Attacco scarico acqua - Wasserablauf - Water outlet
 Vidange de l'eau - Desaguadero - Wateraftapaansluiting
EN 10226-1 R 1

1

GAS PASTA COOKER 1 BOWL 40 L

Project:
Rev:
Zone:
Location:



CODICE
CR0990029

MODELLO
D73/10CPG

SERIE
DIAMANTE70

Product's PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



Safety pressure switch to prevent activation of heating without water in the tank.



Water loading by means of solenoid valve.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



GAS PASTA COOKER 1 BOWL 40 L

Project:
Rev:
Zone:
Location:



CODICE
CR0990029

MODELLO
D73/10CPG

SERIE
DIAMANTE70

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|------------|------------------|---|
| CR1356219 | CCP13F60 | Basket 16x28x18 cm GN1/3 FOR D93/10 CP. |
| CR0999229 | 7KIT-A | PASTA COOKER KIT |
| CR0999239 | 7KIT-B | PASTA COOKER KIT |
| CR0999249 | 7KIT-C | PASTA COOKER KIT |
| CR0789950 | 96KIT-A (93....) | Bath Test Kit 96KIT-A (93....) |
| CR0789960 | 96KIT-B (93....) | Bath Test Kit 96KIT-B (93....) |
| CR0592789 | ZF6 | |
| CR0592830 | ZG | |
| MA97432000 | R | |
| MA97433000 | RI | |
| CR0592869 | PZM | |
| CR0593580 | 9PT | |
| CR0592879 | KPA | |
| CR0599649 | 7ZL | |