

FlexiTop

Mobile hot and frost combination serving counters

Models

Single Tier

- SFTS-36-NUP UNIT,36.00 LG
- SFTS-50-NUP UNIT,50.00 LG
- SFTS-60-NUP UNIT,60.00 LG
- SFTS-64-NUP UNIT,64.00 LG

Dual Tier

- SFTS2-36-NUP UNIT,36.00 LG
- SFTS2-50-NUP UNIT,50.00 LG
- SFTS2-60-NUP UNIT,60.00 LG
- SFTS2-64-NUP UNIT,64.00 LG



Standard Features

- Designed to run hot or cold
 - Hot - min temp 100° (100°-180° F)
 - Cold - 0° - 20° F
- Aluminum surface top
- 1/2" drain
- Stainless steel top and exterior body
- 14 gauge galvanized bottom
- Cord and plug supplied standard
- High density environmentally friendly, Kyoto Protocol compliant, Non ODP (Ozone Depletion Potential) polyurethane foam throughout
- Environmentally friendly R290 GreenGenius refrigerant
- 3 position rocker switch for hot, off and cold operations
- 2 year parts and labor warranty standard

Options & Accessories

- Tempered glass sneeze guard
 - customer or operator side
- Stainless Steel Overshelf

Specifications









Top: Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

Interior: Hot/cold top surface is constructed of aluminum, thermally isolated from a full perimeter S/S drain trough. Heaters and refrigeration lines are secured to the bottom side of the aluminum top to insure even distribution of frost and heat. A galvanized outer body is utilized to retain high-density, environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Now GWP (Global Warming Potential) closed-cell polyurethane insulating foam.




Exterior body: is constructed of 18-gauge stainless steel side panels and 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with 14-gauge galvanized channel supports.

Casters: unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyurethane casters and plate brakes. Overall height of caster assembly is 6" (15cm)





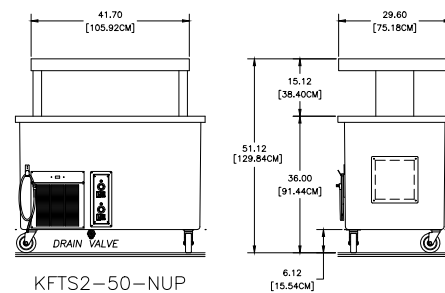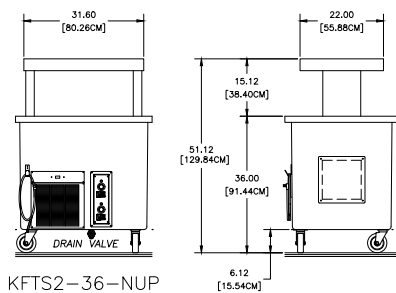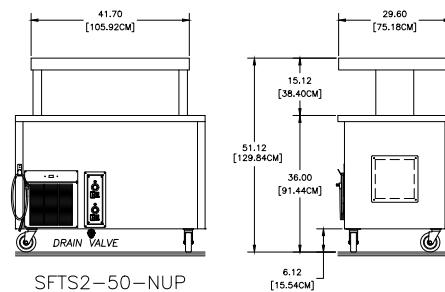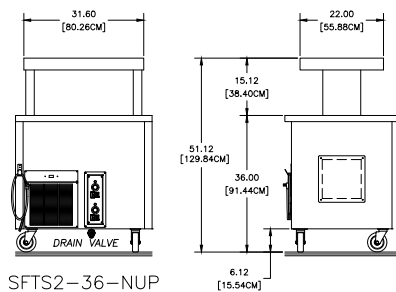




Welbilt reserves the right to make changes to the design or specifications without prior notice.

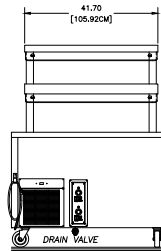



SFTS2-50-NUP
WITH OPTIONAL TOP
SHELF AND SNEEZE GLASS





SFTS2-60-NUP




KFTS2-60-NUP




KFTS2-64-NUP



SFTS2-64-NUP



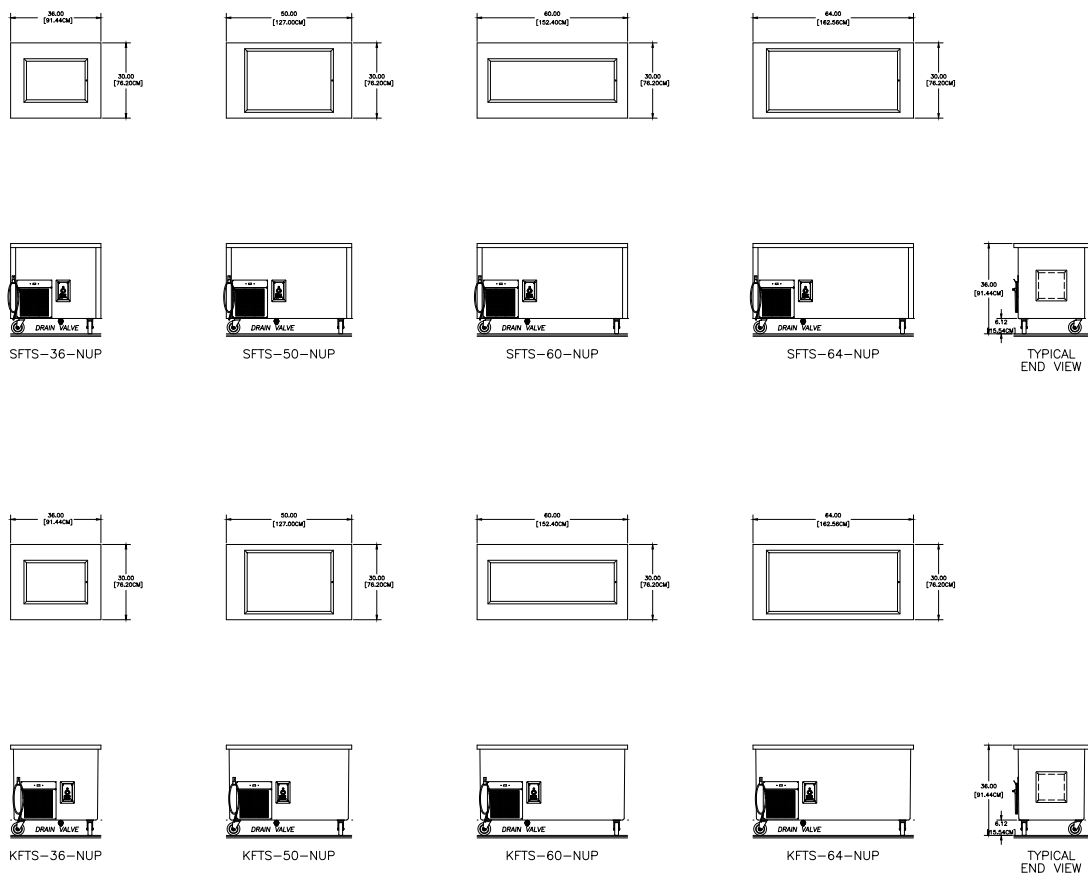

Specifications							
Model	18 x 26 Sheet pan capacity (recessed 3/4")	V/HZ/Ph	Amps	H.P	Nema Plug	BTU Load	System Capacity
SFTS-36-NUP	1	115/60/1	2.4	1/5	5-15P	440	616
SFTS-50-NUP	2	115/60/1	4	1/5	5-15P	644	735
SFTS-60-NUP	2	115/60/1	4	1/5	5-15P	802	790
SFTS-64-NUP	3	115/60/1	6	1/5	5-15P	836	790
SFTS2-36-NUP	2	115/60/1	4	1/5	5-15P	594	773
SFTS2-50-NUP	4	115/60/1	8	1/4	5-15P	882	887
SFTS2-60-NUP	4	115/60/1	8	1/4	5-15P	1412	1311
SFTS2-64-NUP	6	115/60/1	12	1/4	5-15P	1471	1324

Welbilt reserves the right to make changes to the design or specifications without prior notice.