



HOSHIZAKI

PREMIER KPS 120 SG Blast Chiller/Freezer



1 / 1 GN



2 / 1 GN

ACCESSORIES INCLUDED

N/A

OPTIONAL ACCESSORIES

N/A

PRODUCT SERIES: PREMIER KPS

ITEM NUMBER: 975780544

COUNTRY OF ORIGIN: ITALY

PREMIER KPS 120 SG is a HACCP compliant blast chiller/freezer for 1/1 GN (max of 20) and/or 2/1 GN trays (max of 10). Chilling/freezing capacity of 120/60kg. It features IFR control system and a user friendly 7" touch display. Use the preset favorite programs or store your customized cycles. Legs are adjustable 105-150mm.

- 7" touch display with coloured icons
- Cooling functions: Chilling (soft/hard), freezing (soft/hard), preservation, precooling, infinity
- 'Hot' functions: Thawing, proofing, retarder-prover
- Choose either IFR operation, time or temperature controlled chill/freeze cycle
- Prevent surface freezing damage with the IFR blast chilling function
- Triple-point probe (3 measuring points)
- HACCP: Infinite events up to one year of recording
- Audio-visual HACCP alarms in case of power failure or if a temperature limit is exceeded
- Alarms: Saving up to 40 events
- 10 favourite programs for both blast chilling, blast freezing and retarder proving
- Up to 20 customized cycles can be stored
- Automatic shift to 'storage mode' after the chilling process
- Automatic fan cut-out when door is opened
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Automatic defrosting
- Easy maintenance with access to condenser without use of tools
- Removable wire rack for 1/1 GN and/or 2/1 GN trays
- Max. Number of pans: 1/1 GN: 20, 2/1 GN: 10
- The internal fan section can be opened for cleaning around and behind the unit
- Right hand hinged door
- Full-height integrated handle
- 90° self-closing door system
- Removable magnetic door gasket

WARRANTY PERIOD

3 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant: R290 / Refrigerant (kg): 0.3 / CO2 equivalent (kg): 0.9 / GWP: 3

CERTIFICATIONS



Energy consumption - Chilling, kWh/kg (ISO 22042:2021)	Energy Consumption - Freezing, kWh/kg (ISO 22042:2021)
0.053	0.165



HOSHIZAKI

PREMIER KPS 120 SG

TECHNICAL SPECIFICATIONS


Tray size / Shelf size	Max number of trays / shelves	Temperature Range	Power Supply	Connection Load (Watt)	Ref. capacity at -25°C (Watt)	Climate Class	Sound Level - dB(A)	Chilling capacity (from +70°C to +3°C in 90 minutes) (kg)	Freezing capacity (from +70°C to -18°C in 4 hours) (kg)
1/1 GN & 2/1 GN	20	-40/+45°C	400V, 3N-/50 Hz	2,500	3,130	5	64	120	60

Distance between guide positions (mm), GN/EN	Dimensions internal (W x D x H) (mm)	Maximum depth of gastro pans (mm), GN/EN	Height from base to first guide (mm)	Height from ceiling to top guide (mm)
530/600	805 x 877 x 950	650/800	105	105

SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm)	Dimensions, Packed, W x D x H (mm)	Net Weight (kg)	Weight, Packed (kg)	Volume Packed (m3)
1041.5 x 1112 x 1893-1938	1120 x 1180 x 2190	285	305	2.894

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

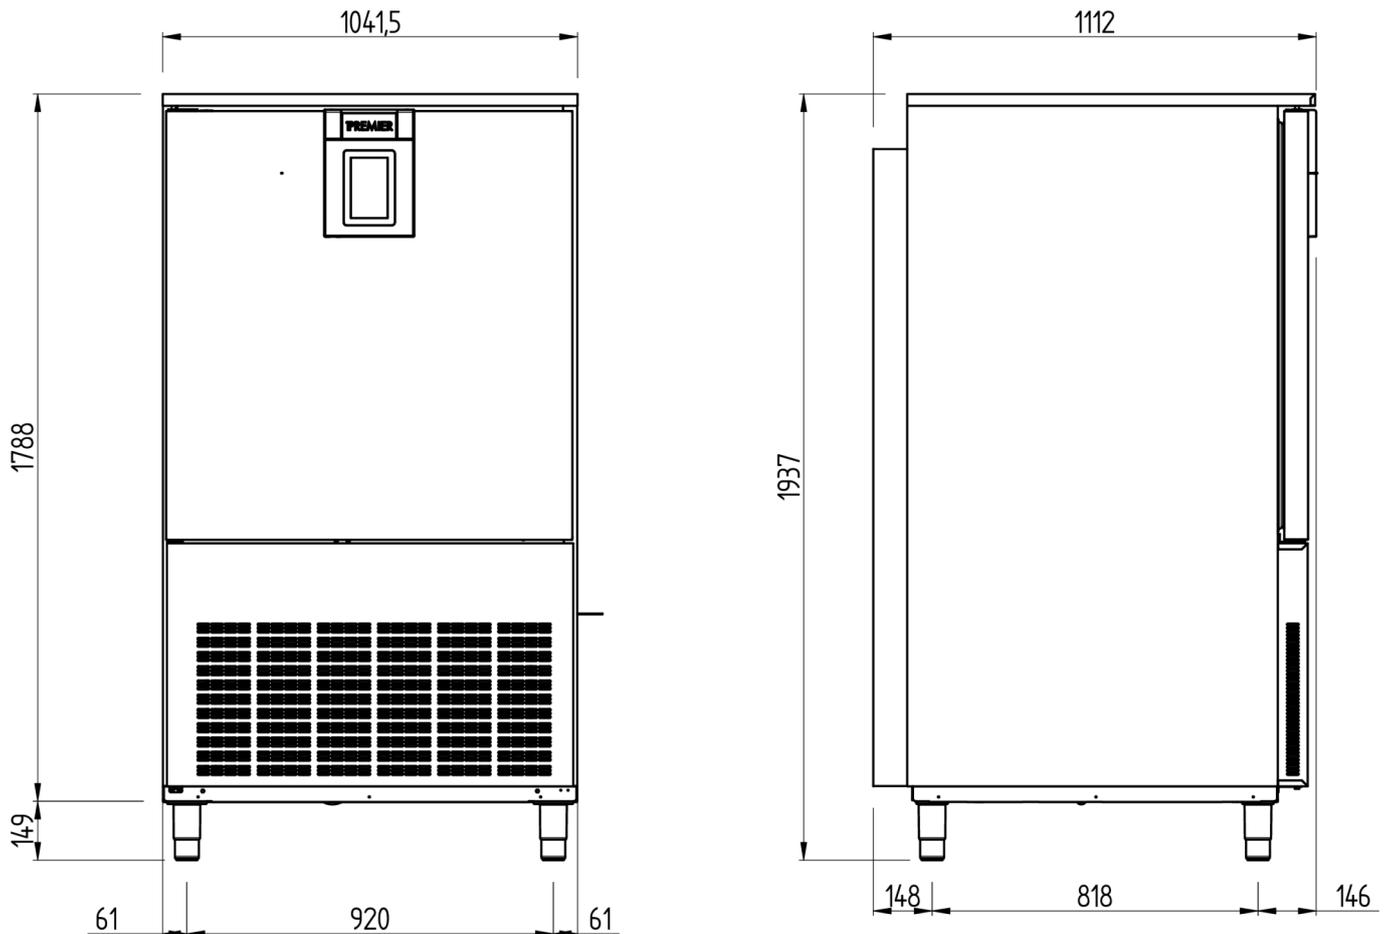

Hoshizaki Belgium
 Hoshizaki Danmark
 Hoshizaki Deutschland
 Hoshizaki France
 Hoshizaki Iberia
 Hoshizaki Italia
 Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands info@hoshizaki.nl
 Hoshizaki Norge salg@hoshizaki.no
 Hoshizaki Sverige orderSE@hoshizaki.dk
 Hoshizaki UK uksales@hoshizaki.uk
 Export countries sales.ex@hoshizaki-europe.com
 Other countries sales.ex@hoshizaki-europe.com

www.hoshizaki.uk