



DUKERS

Quality Commercial Refrigeration

Item# _____

Qty# _____

Model# _____

Project# _____

GASRANGE

DCR24-GM/24"GriddleTopGasRange



Casters are inside the oven



Knobs

Cooking Surface



PRODUCT DESCRIPTION

- ✦ Stainless steel exterior including front, back sides, kickplate, backguard and overself
- 🔥 Heavy duty 12"X12" removable, cast iron top grates
- 🌡️ Oven temperature range between 175°F to 500°F
- 🔌 3/4" NPT reargas connection and regulator standard.
- 🔧 Two (2) chrome oven rack per oven standard, multiple position oven rack guides
- 🍳 Enamel interior oven for easy cleaning.
- 🛞 6" casters with lock for easy mobility.
- 📏 3/4" Steel Plate.



HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN

GASRANGE MODEL

DIMENSION

Width	Depth	Height
-------	-------	--------

DCR24-GM

24in

31 1/2in

56in



DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

📞 1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com


DETAILS & SPECIFICATIONS

DCR24-GM

FrontView

SideView

TopView

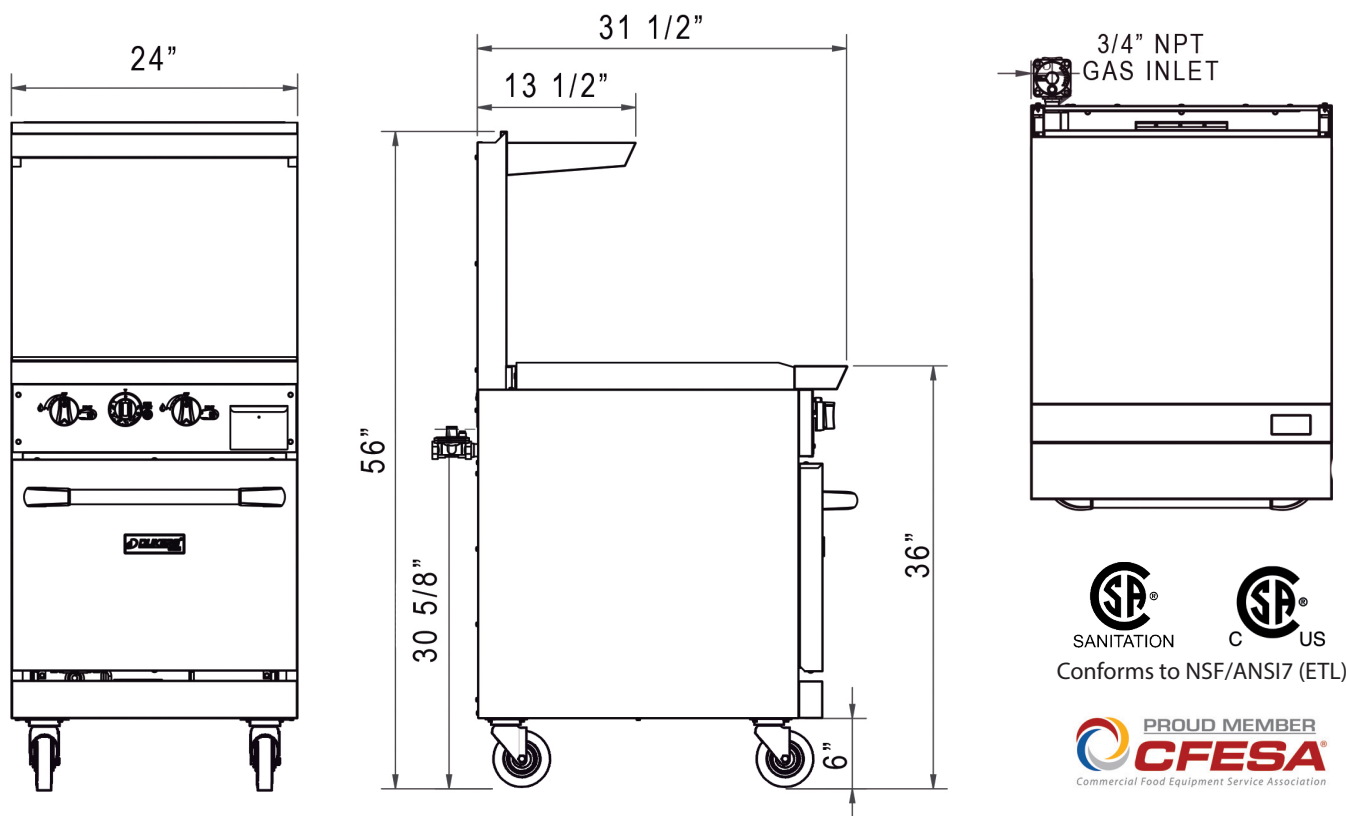



 SANITATION C US
 Conforms to NSF/ANSI7 (ETL)


 PROUD MEMBER
CFESA
 Commercial Food Equipment Service Association

Product Specifications

WORKING AREA 24"x20"
 GAS TYPE LPG/NG
 OVEN SIZE 20 3/4"x26"x14"

BURNERS
 SINGLE OUTPUT BTU
 NOZZLE #
 TOTAL OUTPUT BTU
 GAS PRESSURE

LPG		NG	
GRIDDLE	OVEN	GRIDDLE	OVEN
2	1	2	1
26000BTU	30000BTU	26000BTU	30000BTU
53	52	43	40
82000BTU		82000BTU	
10		5	

Model	Packaging Dimensions (inches)			Net Weight (lbs)	Ship Weight (lbs)	Container Capacity 40'HQ
	W	D	H			
DCR24-GM	26"	364/5"	381/5"	304.70	370.70	86



Los Angeles | San Francisco | Dallas
 Houston | Florida | Chicago | New Jersey

1-800-931-8628

@ info@dukersusa.com

www.DukersUSA.com