

SCFT-NUP

Mobile Self-Contained Frost Top Serving Counter

Models

- SCFT-36-NUP - 36" Mobile frost top serving counter without understorage
- SCFT-50-NUP - 50" Mobile frost top serving counter without understorage
- SCFT-60-NUP - 60" Mobile frost top serving counter without understorage
- SCFT-74-NUP - 74" Mobile frost top serving counter without understorage
- SCFT-96-NUP - 96" Mobile frost top serving counter without understorage



SCFT-74-NUP

* Model shown with optional cord hook.

Standard Features

- Stainless steel exterior body and top
- Galvanized bottom
- Frost top is one piece stainless steel construction; perimeter drain with valve located at bottom of unit standard
- 18" x 26" sheet pan can rest on frost top
- On/off switch located on exterior of unit
- SCFT units are standard with enclosed base
- A maximum 10' long cord and plug
- All exterior panels reinforced with overlapping corners, welded in place
- All body cutouts reinforced with channel supports
- All units are standard on 5" diameter polyurethane swivel casters for easy cleaning
- Easy to use stainless steel interlock system is standard on base and tray slides
- Environmentally friendly R290 refrigerant
- Two years part and labor, seven year compressor warranty

Options & Accessories

- Tray slides and work shelves
- Composite fold-down cutting boards
- Line-up interlock device
- Food shields
- Glass-front counter protector
- Stainless steel overshef
- Fluorescent or incandescent light fixtures*
- Open understorage with shelf
- 120V/60Hz/1Ø, 10 amp convenience outlet with breaker*
- Dry storage compartment
- Stainless steel trim strips
- Stainless steel end drop shelf
- Adjustable height casters
- 6" (15cm) high adjustable stainless steel legs in lieu of casters
- Laminate exterior panels in lieu of stainless steel exterior panels
- Cord hook (single or double)

* Inclusion of these options will alter the electrical specifications of unit

Specifications

Exterior body is constructed of stainless steel side panels and galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with galvanized channel supports.

Exterior top is constructed of stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.




Frost top is stainless steel, one-piece construction and perimeter trough. Underside of frost top is sealed with refrigeration lines and insulated with high-density, closed cell environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane. Frost top assembly is enclosed in a galvanized steel jacket. The frost top is separated from the exterior top by a thermal break.

Refrigeration system uses R290 refrigerant and has a self-contained 115 volt, 60 Hertz, single phase hermetically sealed condensing unit.


Unit is wired with a 3-wire, grounded, maximum 10' (3m) cord and plug. Unit has an on/off switch mounted on the exterior.

Casters: Unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6.00" (15cm).



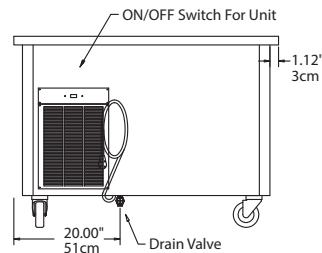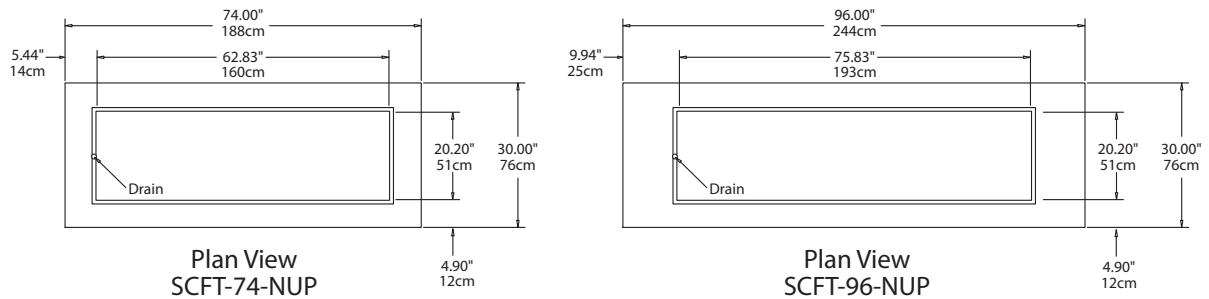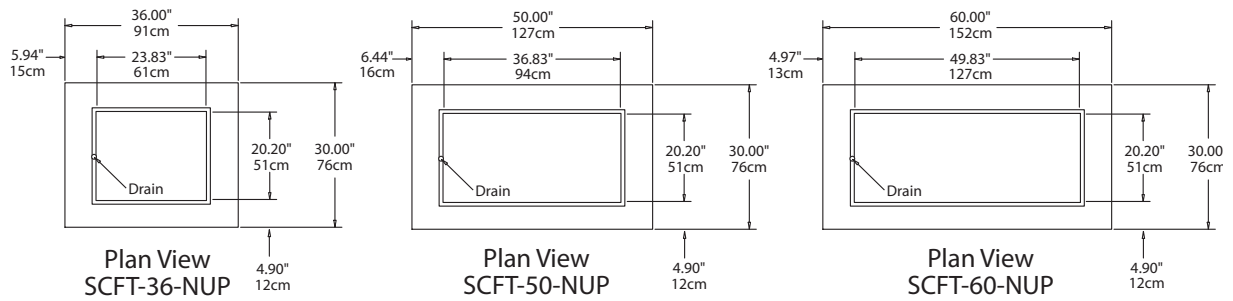

Elevation View
All SCFT-NUP Models

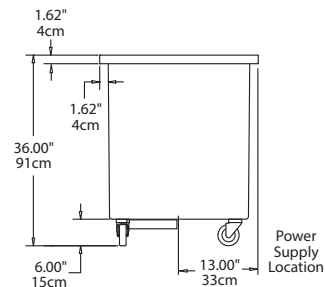

End View
All SCFT Models

Specifications								
Model	V/Hz/Ph	Amp	H.P.	BTU Load @ 75F	BTU System Capacity @ 75F	Nema Plug	Ship Weight	"DOE kWh/d (base only)"
SCFT-36-NUP	115/60/1	2.4	1/5	642	642	5-15P	380 lbs/172 kg	n/a
SCFT-50-NUP	115/60/1	2.4	1/5	861	861	5-15P	455 lbs/206 kg	n/a
SCFT-60-NUP	115/60/1	3.7	1/4	1207	1207	5-15P	540 lbs/245 kg	n/a
SCFT-74-NUP	115/60/1	3.7	1/4	1399	1399	5-15P	610 lbs/277 kg	n/a
SCFT-96-NUP	115/60/1	4.8	1/3	1748	1748	5-15P	680 lbs/308 kg	n/a

Welbilt reserves the right to make changes to the design or specifications without prior notice.