

{13.54}



RD Aluminum Pan Racks

Heavy-duty, factory assembled, riveted aluminum construction racks are perfect for all areas including freezers, coolers, or bakeries. Pass-thru design provides maximum convenience.

Features & Benefits:

- **Rugged:** Double-riveted aircraft construction throughout.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Lightweight:** Easy to handle.
- **Sanitary:** Easy cleaning
- **Rapid Cooling**
- **Ideal** for freezer operations, refrigerator use, bakeries, commissaries.

Specifications:

- **Material:** Special design, natural finish, high strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction throughout.
- **Corner Posts:** 1.5"x1.5"x.125" (38x38x3.1mm) angle-shaped.
- **Top & Bottom:** 1.5"x1.5"x.125" (38x38x3.1mm) angle-shaped riveted to four corner posts.
- **Casters:** Two Swivel / Two Brake – 5" (127mm) ball bearing swivel, self-lubricating axle, rubber-wheeled, zinc-plated, bolted to full-length, 14-gauge channel bottom frame.
- **End-load & Side-load Rack Slides** 3" (76mm) & 5" (127mm) Spacing: .060"x1.25"x1.5" (1.5x32x38mm) bulb-tipped angle, double-riveted to posts. RD15N and RD25N – .080"x1.25"x3" (2.0x32x76mm).
- **End-load & Side-load Rack Slides** 1.5" (38mm) Spacing: .060"x.5"x1.5" (1.5x12.7x38mm) bulb-tipped, extruded channel double-riveted to posts.



End-Load
(RD3N)



Side-Load
(RD33N)



{13.54} RD Aluminum Pan Racks



No. of Pans	Pan Capacity (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)		Load	Cat. No.
20	18x26	457x660	52	23.6	End-Load	RD3N
40	14x18	355x457				
40	18x26	457x660	52	23.6	End-Load	RD13N
18	15x20	381x508	49	22.2	End-Load	RD15N
18	16x22	406x553				
12	18x26	457x660	45	20.4	End-Load	RD23N
24	14x18	355x457				
20	18x26	457x660	45	20.2	Side-Load	RD33N

Note: 5" (127mm) swivel casters, two with brakes, are standard on units listed above.
Weight Load Capacity: 20 lbs. (9kg) per slide level; 350 lbs. (159kg) per rack. Allowable temperature range: -30°F (-34°C) to 160°F (71°C).

Accessories



Description	Cat. No.
*Gray Continuous Bumper	A33RD
**Gray Corner Bumpers	A37
Pan Stop	A120

*Adds 2" (51mm) to overall width and depth of rack.




**Adds .5" (12.7mm) to overall width and 1" (25mm) to overall depth of rack.

Note: Accessories must be ordered with rack. Not designed for field installation. Accessorized racks shipped assembled. Part numbers will be combined to signify complete unit at time of order entry.


End-Load Units

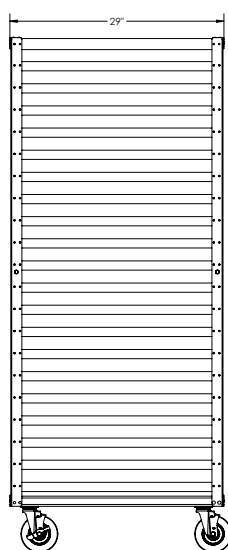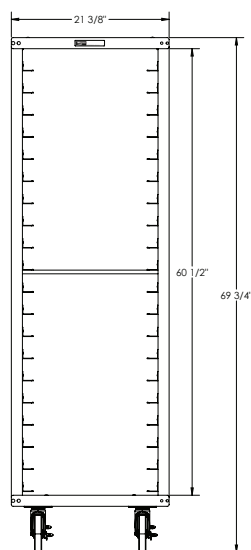







RD3N SLIDE SPACING

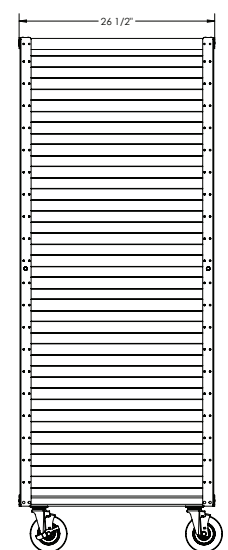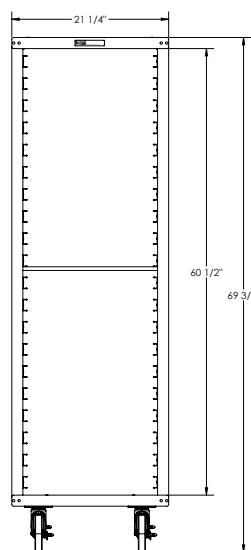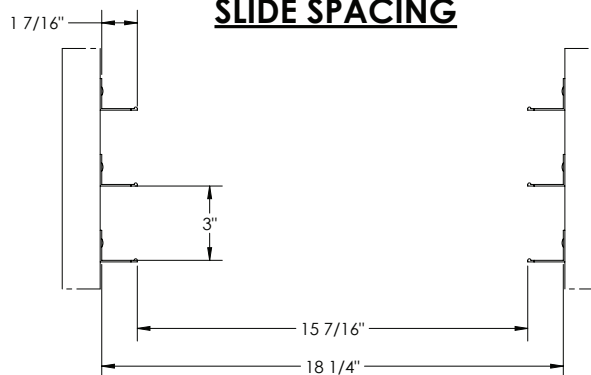




RD13N SLIDE SPACING

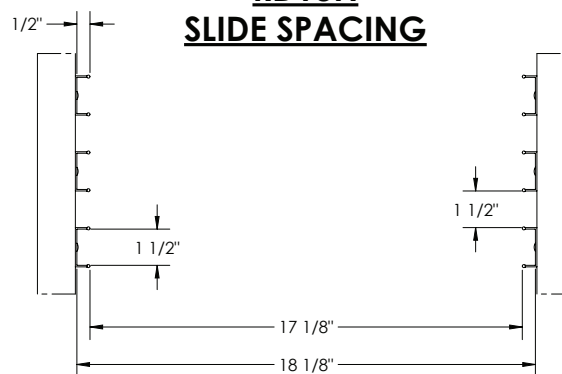

End-Load Units

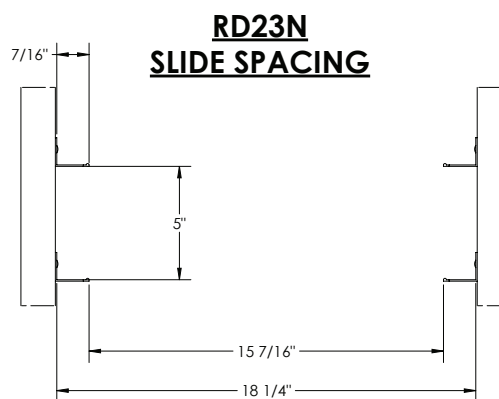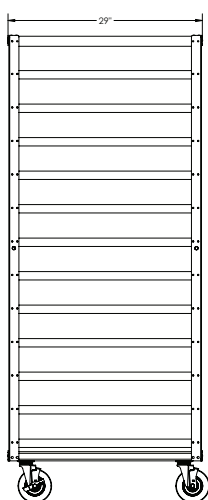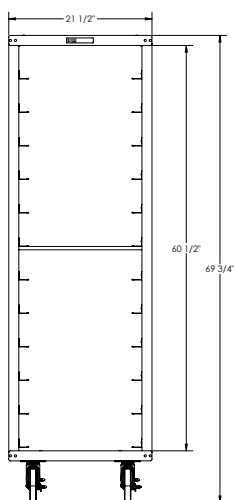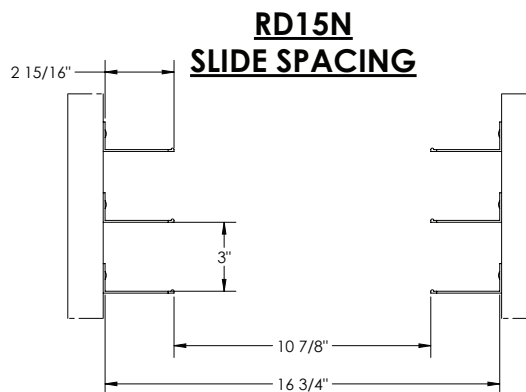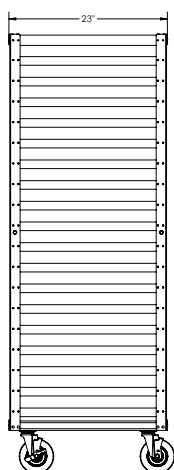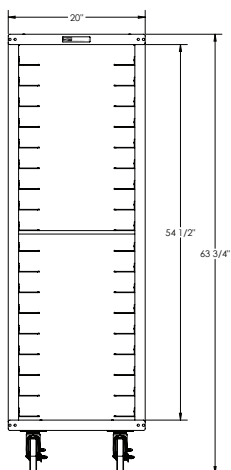

Side-Load Units

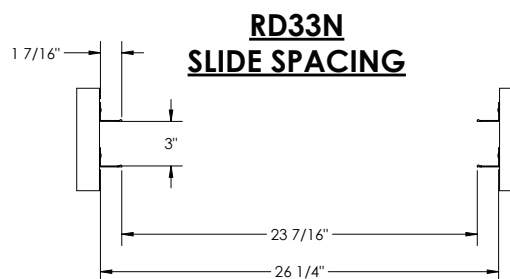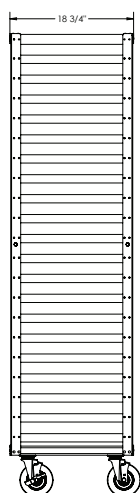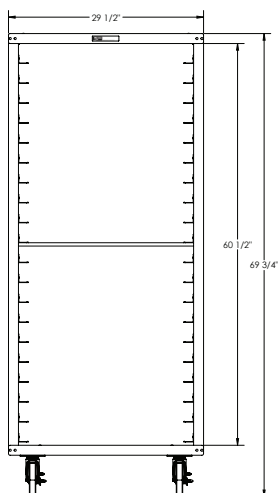

{13.54}

RD Aluminum Pan Racks



Side-Load Units

