

ELECTRIC FRYER 1 BOWL 15 L

Project:
Rev.:
Zone:
Location:



CODICE
CR1353659

MODELLO
D7215/10FRERE

SERIE
DIAMANTE70



GENERAL CHARACTERISTICS

In addition to offering the widest choice of solutions and 2 mm thick and 70 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently. Scotch Brite finish stainless steel outer shells and feet. Worktop height adjustable from 840 to 900 mm. Modularity of range: 200-400-600-800-1200 Wide range of accessories.

TECHNICAL SPECIFICATIONS

AISI 18/10 stainless steel tanks with cold zone and foam expansion zone.
Oil drain taps. Oil drip pans on request.
Safety thermostat (230°C) against excessive oil temperatures.
IPX5 water jet protection

Tank depth and width increased to increase capacity.

Moulded basin with flat top and large cold zone for easy cleaning.

The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.

ELECTRIC FRYER 1 BOWL 15 L

Project:
Rev.:
Zone:
Location:



CODICE
CR1353659

MODELLO
D7215/10FRERE

SERIE
DIAMANTE70

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1353659
DEFINITION	D7215/10 FRERE FRIG.EL.R/RIB.M40 1V 15LT
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	870 mm
NET WEIGHT	42,000 Kg
VOLUME (net)	0,244
PACKAGE LENGTH	440,000 mm
PACKAGE WIDTH	850,000 mm
PACKAGING HEIGHT	1 160,000 mm
PACKAGE VOLUME	0,435 m3
GROSS PACKING WEIGHT	51,000 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50/60 Hz
ELECTRICAL POWER	13,000 kW
IP GRADE	IPX4
CERTIFIED MODEL	D7215/10 FRERE


ELECTRIC FRYER 1 BOWL 15 L

Project:
Rev.:
Zone:
Location:



CODICE CR1353659	MODELLO D7215/10FRERE	SERIE DIAMANTE70
---------------------	--------------------------	---------------------

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

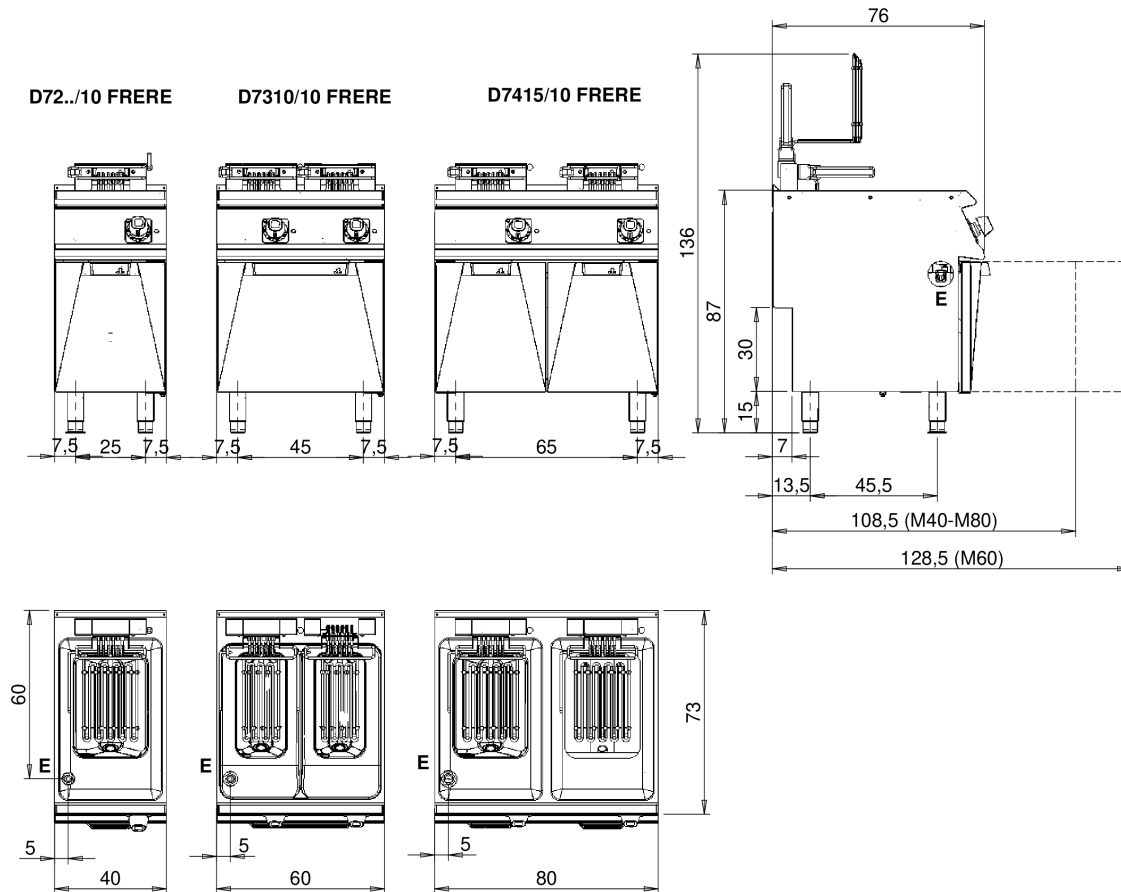

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão	A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	

ELECTRIC FRYER 1 BOWL 15 L

CODICE
CR1353659


MODELLO
D7215/10FRERE

SERIE
DIAMANTE70


Project:
Rev.:
Zone:
Location:



Product's PLUS



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.




Tank depth and width increased to increase capacity.



Moulded basin with flat top and large cold zone for easy cleaning.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed, without compromising functionality and safety.



The large cold zone allows frying residues to settle, significantly extending the quality and life of the oil.

ELECTRIC FRYER 1 BOWL 15 L

Project:
Rev.:
Zone:
Location:



CODICE
CR1353659

MODELLO
D7215/10FRERE

SERIE
DIAMANTE70

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1353879	DCF15/17	Basket for tub 15 - 17 litres 1 pcs 24x33,7x12 cm capacity 15-17 litres
CR1353889	DCF15/17P	Small basket for tub 15-17 litres 1 pcs 12x33,7x12 cm capacity 15-17 litres
CR1353929	D9BRO	
BN0221100047	CA 40/10	
BN0221100048	CA 60/10	
CR0592779	ZF4	
CR0592830	ZG	
CR0592820	9ZL	
MA97432000	R	
MA97433000	RI	
CR0592869	PZM	
CR0593580	9PT	
CR0592879	KPA	
CR0592940	9CAT *	Water column for top equipment