
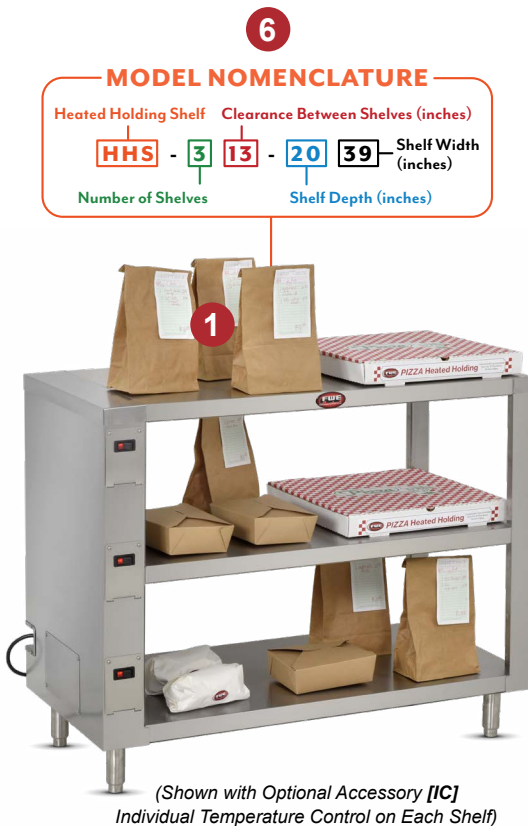


HEATED HOLDING SHELVES**For Serving Trays, Takeout Containers, Catering Boxes, and Bagged Meals**TEMP SET RANGE: 90° – 190°F (32° – 88°C) **RADIANT “HHS” SERIES**

For kitchen expediting areas, self-service displays, point of sale, and “order-ahead” pick-up staging, FWE’s heated shelves keep your “ready-to-eat” guest meals and “to-go orders” hot and safe, with quick access - high visibility format

***Two year limited warranty**

Items Kept Hot and Ready



Blanket Elements Deliver Precise & Consistent Radiant Heat




Customize Sizing & Spacing



All Stainless Steel Construction

SPECIFICATIONS

HEATED HOLDING SHELVES

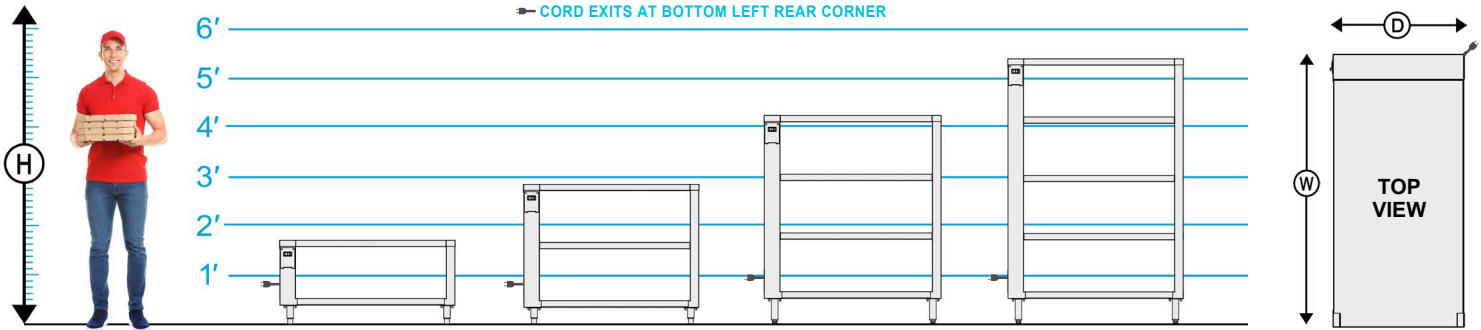

OVERALL EXTERIOR DIMENSIONS IN. (mm)							CONSULT FACTORY FOR SHIPPING CLASS	
MODEL NUMBER	SHELF SIZE DIMENSIONS [A]			HIGH "H"	DEEP "D" [B]	WIDE "W"	LEG SIZE	SHIP WT. LBS. (KG)
	SHELF DEEP "D"	SHELF WIDE "W"	SHELF CLEARANCE					
	20"	39"	13"	20" (508)	20.25" (515)	43" (1092)	4"	195 (89)
	20"	39"	13"	34.25" (870)	20.25" (515)	43" (1092)	4"	215 (98)
	20"	39"	13"	50.5" (1283)	20.25" (515)	43" (1092)	6"	255 (116)
	20"	39"	13"	64.75" (1645)	20.25" (515)	43" (1092)	6"	330 (150)

[A] Standard width is 39". Custom width available. Consult factory.

[B] Depth can be modified to meet customer requirements. Consult factory.

Models are Available with **Individual Temperature Control on Each Shelf** [add "IC"]

ELECTRICAL DATA				
MODEL NUMBER	HHS-213-2039		HHS-313-2039	
VOLTS	120	220-240	120	220-240
WATTS	694	826	1041	1239
AMPS	5.8	3.4	8.7	5.2
HERTZ	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single
PLUG USA				
	5-15P	6-15P	5-15P	6-15P
PLUG CANADA				
	5-15P	6-15P	5-15P	6-15P
MODEL NUMBER	HHS-413-2039		HHS-513-2039	
VOLTS	120	220-240	120	220-240
WATTS	1388	1652	1735	2065
AMPS	11.6	6.9	14.5	8.6
HERTZ	50/60	50/60	50/60	50/60
PHASE	Single	Single	Single	Single
PLUG USA				
	5-15P	6-15P	5-15P*	6-15P
PLUG CANADA				
	5-15P	6-15P	5-20P	6-15P

*Dedicated circuit.



Customize shelf dimensions and spacing to fit your operation.
Consult Factory.

Powder coat your shelves to match your design.

Consult Factory for Ultra-Premium Color Options.



CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 14 gauge outside corners, 20 gauge stainless steel shelves and polished exterior wall. Rear hold down brackets to secure unit for safety.

INSULATION. High density ceramic insulation throughout each shelf.

LEGS. Each leg shall have a reinforced 10 gauge mounting plate welded to base of unit.

ELECTRICAL CHARACTERISTICS. 3 wire grounded tri-directional power cord and plug, rear mounted for safety. See electrical data chart above for amperage, receptacle configuration and dedicated circuit information.

HEATING SYSTEM/CONTROLS.

Radiant heat system shall include a blanket heating element system. Controls shall include a master ON/OFF switch with power

indicator light. Adjustable temperature range from 90°F to 190°F (32°C to 88°C). Standard factory preset to 175°F (79.5°C).

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

ELECTRICAL

Individual temperature control [IC]

SPACINGS

Custom shelf size and spacing

LEGS

Legs with flanged feet

EXTRAS

Enclosed on three sides

Powder coating

LED Lighting