


## Synergy refrigerated deli display - Flat glass full height screen

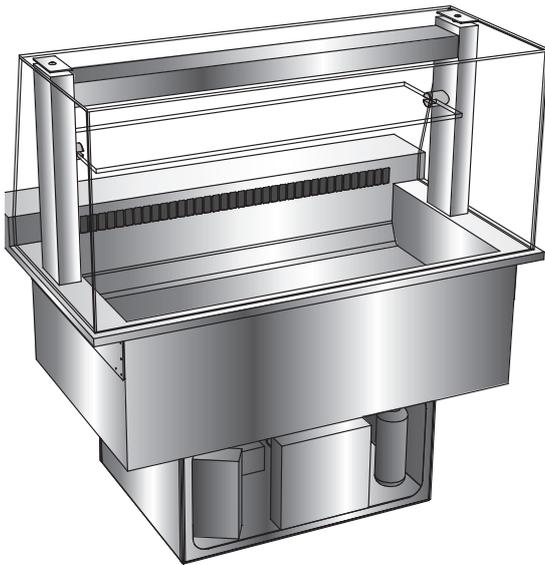

Model No: **SFRDL2** - 2 x GN1/1 size

Model No: **SFRDL3** - 3 x GN1/1 size

Model No: **SFRDL4** - 4 x GN1/1 size

Model No: **SFRDL5** - 5 x GN1/1 size

### Dimensions

Model - - - - - Top size - - - - - Cut out size - - loading  
SFRDL2 - - 850 x 755 x 540mm high - - 725 x 646mm - 1.6kW  
SFRDL3 - 1177 x 755 x 540mm high - 1045 x 646mm - 1.6kW  
SFRDL4 - 1504 x 755 x 540mm high - 1370 x 646mm - 2.1kW  
SFRDL5 - 1831 x 755 x 540mm high - 1700 x 646mm - 2.4kW

**Electrical Connection:** 220V/240V, 1 phase, 50 Hz.

**Refrigerant:** R404a CFC free refrigerant

**Cable:** Units fitted with 2 metres of cable and 13 amp plug.

**Construction:** Top:-Stainless Steel, Exterior- Stainless Steel, Interior: Stainless Steel

### Operating conditions

Designed to comply with the operating requirements of EN ISO 23953 - 2:2005  
Performance level M1 (-1°C to + 5°C) in Climate class 3 (25°C, 60%RH,0.2m/s) and  
Performance level M2 (-1°C to + 7°C) in Climate class 4 (30°C, 55%RH,0.2m/s)

### Product Features

Designed for assisted service. With rear preparation shelf.

### Gantry Features

- Constructed from 50mm diameter, bright polished stainless steel tube.
- Fluorescent illumination to stainless steel light box.
- Toughened flat glass full height screen and over shelf
- One ambient glass mid-shelf
- Digital temperature control and readout.

### Well Features

- 304 Stainless steel well - 170mm deep
- Load line indicator at 100mm to assist in the safe presentation of food
- Accepts GN1/1 gastronorm containers up to 100mm deep.
- Completely removable well giving easy access for cleaning and maintenance.

### Extras

- Polyethylene cutting board 600 x 250 x 40mm - Fits over rear preparation shelf.