**Catalogue**
FOOD SERVICE
**Chapter**
COOK & CHILL

**Specific model**
SVP-2-950/100 G 400V 50/60Hz 3Ph PE

19075921 21/07/2022

**DENOMINATION:**

Vacuum packer with 2 horizontal bars of 950 mm and pump capacity of 100m3/h. Model with inert gas inlet.

**DESCRIPTION :**

- Vacuum packers with digital controls, controlled by sensor.
- Made of stainless steel, no sharp corners and rounded edges.
- 2 units of high-quality polycarbonate fill sheets.
- High-precision microprocessor which controls the vacuum percentage of the chamber, therefore enabling precise and consistent results at all times, regardless of the type/quantity of the product to be packaged.
- Digital control panel with display included.
- Easily programmable memory for 10 programmes.
- Possibility of performing additional 60” vacuum.
- Possibility of packaging liquids.
- H2Oout programme to dehumidify the pump.
- Programme for external packing both in bags and containers.
- All models include Busch pumps.
- Reed switch for automatic start the vacuum cycle once the lid is closed.
- Lid with gas shock absorbers for smooth opening.
- Piston with two positions: operation and standby. In standby position, the lid is not stressed by the piston, ensuring that it does not become deformed over time.
- Cable-free sealing bars with pneumatic pistons. Their shape ensures a hermetic seal even when using multiple packaging (2-3 bags).
- Protection against possible entry of water into the machine.
- Thanks to the injection of inert gas, the G models make it possible to package delicate or soft products.
- Oil level indicator.
- Audio and visual alarms: vacuum alarm (warning if the configured vacuum level is not reached) and oil change.
- Visualisation of the complete machine cycles.
- Tilting opening system which enable easy access to all parts for maintenance.
- Internal electronic cards, protected with hermetic casing (waterproof and flame retardant).
- Easy to replace teflon of the sealing bar."
- Thanks to the injection of inert gas, this model make it possible to package delicate or soft products.

**POSSIBLE ACCESSORIES :**

- ACCESSORIES
- LIQUID PACKAGING
- EMPTY INTO CONTAINERS

**DIMENSIONS**




| | | | | | |
|---|---|---|---|---|---|
| X Width | 1100 | mm | X Gross width | 1080 | mm |
| Y Depth | 790 | mm | Y Gross depth | 1400 | mm |
| Z Height | 1067 | mm | Z Gross height | 1370 | mm |
| Net Weight | 250,0 | kg | Gross Weight | 290,0 | kg |
| Net volume | 0,927 | m3 | Gross volume | 2,071 | m3 |

**ELECTRICITY TECHNICAL SPECIFICATIONS**

| | |
|---|---|
| Electric power | 2,500 kW |
| Voltage | 400V - 3N |
| Electric frequency | 50/60Hz |

**OTHERS**

| | |
|---|---|
| Noise level | 66,00 dB |

**Catalogue**
FOOD SERVICE
**Chapter**
COOK & CHILL

**Specific model**
SVP-2-950/100 G 400V 50/60Hz 3Ph PE

19075921 21/07/2022

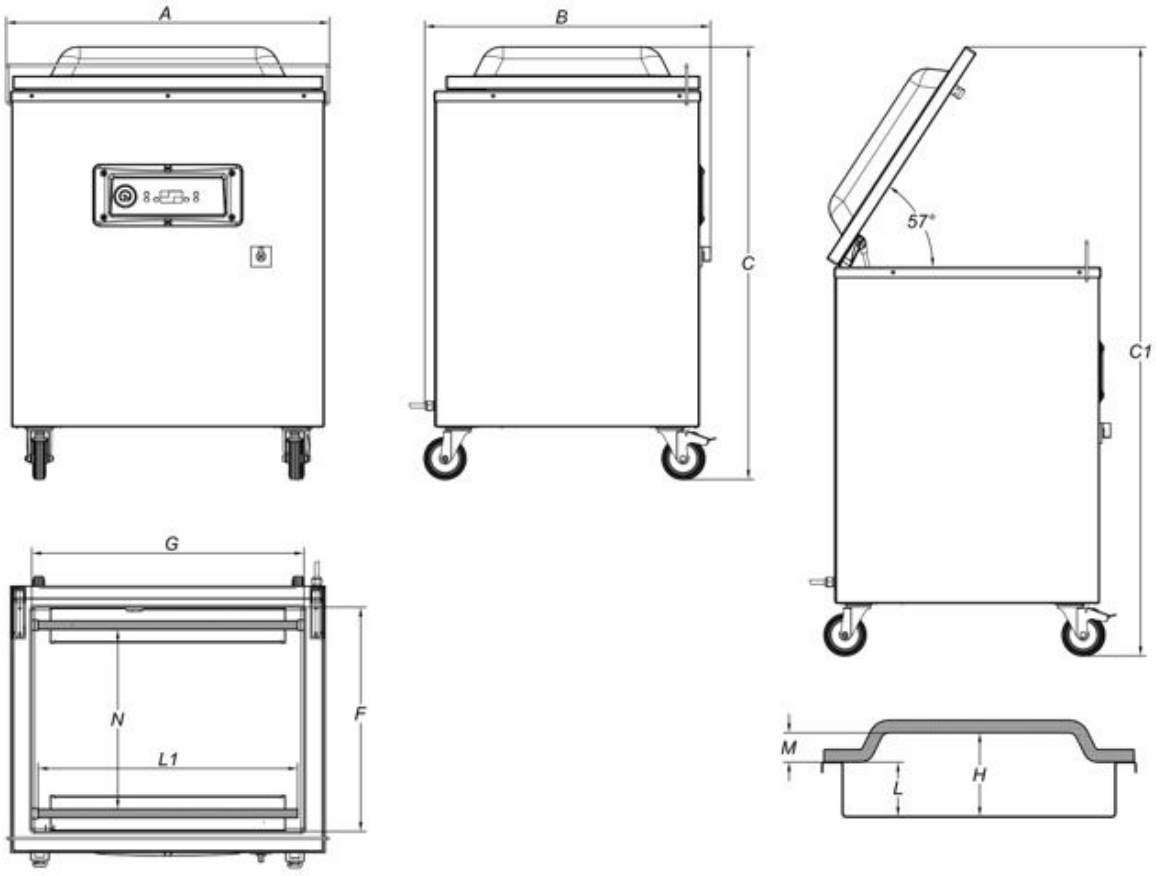


## SPECIFICATIONS

| | | |
|---|---|---|
| N. welding bars / N. de barras | **Nº** | 2 |
| Bar length L1 / Longitud barra L1 | **mm** | 950 |
| Chamber Size (FxGxH) / Tamaño cámara (FxGxH) | **mm** | 585x980x230 |
| Useful space Chamber (N) / Espacio útil cámara (N) | **mm** | 480 |
| Chamber depth (L) / Profundidad cámara (L) | **mm** | 130 |
| Chamber volume / Volumen cámara | **Lt** | 137 |
| Overall dimensions (AxBxC) / Dimensiones generals (AxBxC) | **mm** | 1100x790x1067 |
| Maximum height with open lid (C1) / Máx. altura tapa abierta (C1) | **mm** | 1520 |
| Weight (with shelves) / Peso (con planchas) | **kg** | 250 |
| Noise level / Nivel ruido | **dB(A)** | 66 |
| Environmental operating temperature (min-max) / Temperatura ambiental trabajo (min-máx) | **°C** | 12-40 |