

APPROVAL: \_



# SOLID DOOR REACH-IN WARMING CABINET

PROJECT.

MODEL # AIA # \_\_\_

CABINET CONSTRUCTION

20 Gauge Stainless Steel Door

Heavy-Duty Cylinder Lock

 Hinged Front Shroud Stainless Steel Breaker Caps **3 Silver Freeze Wire Shelves** 

FEATURES

Low Profile Vertical Door Handle

Stainless Steel Exterior And Interior

Stainless Steel Interior Door Liner

One Piece, Snap-In Magnetic Door Gaskets

 6" High Adjustable Stainless Steel Legs 8' Cord And Plug (see electrical data for details)

• Full Electronic Control With Touchpoint Interface

 Built-In, Adjustable Humidity Control Vent Safety Shielded Strip Type Heating Elements

Manager's Lockout Feature

Adjustable Electronic Temp Control From 80°F To 180°F

Externally Mounted Blower Maintains Even Temperatures

Heavy Duty Cam Lift Hinges With 120 Stay-Open Feature Proximity Door Switch Activates Interior Incandescent Lighting

ITEM # \_

# **HS-1D-1**



## **EXCLUSIVE WARRANTY**

- 7 Year Parts & Labor Warranty
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)





### **OPTIONS & ACCESSORIES**

- Stainless Steel Back And Shroud
- Stainless Steel Kick Plate
- Exterior Door Laminate
- Additional Shelves
- Tray Slides (type A & A/C)
- · Door Swing Orientation (at time of order)
- Correctional Package
- 6" Seismic Legs

#### 3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168 Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 7/1/24 Printed in U.S.A.

SOLID DOOR REACH-IN WARMING CABINE

#### • 3" Or 6" Casters

\_\_ DATE: \_\_\_




www.energystar.gov/cfs



ULTRASPEC SOLID DOOR REACH-IN WARMING CABINET HS-1D-1

POWERED BY

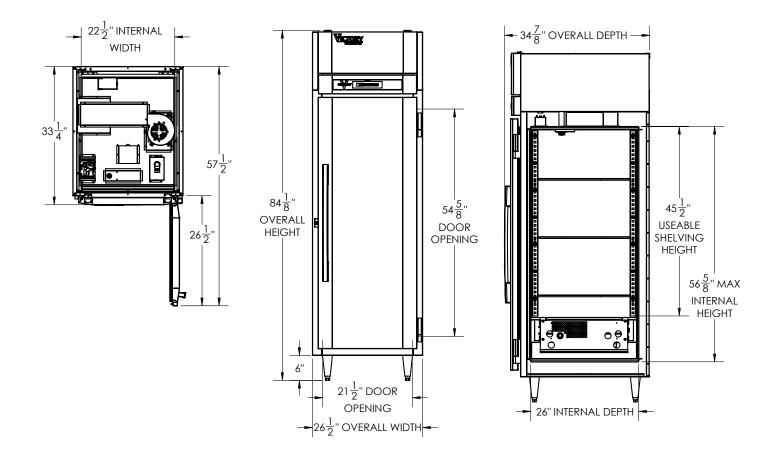

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top clearance is required					
CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	21.5	Cabinet Voltage	208-240/60/1	Height	87″
Width, Overall (in.)	26 1/2"	Total Amperes	6.8	Width	35″
Depth, Overall (with handle)	34 7/8"	NEMA Plug (8' cord)	6-20P	Depth	45″
Height Overall (6" legs)	84 1/8"	Heater Watts	1500	Crated Weight	488 lbs
Depth, Door Open 90°	57 1/2″				
Door Opening (in.)	21 1/2" x 54 5/8"				
No. Of Doors/Shelves	1/3				

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168 Sales@VictoryRefrigeration.com VictoryRefrigeration.com Rev. 7/1/24 Printed in U.S.A.

