

Digital Undercounter Refrigerated Counter Saladette - 250lt, 2 Door with lid and chopping board

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


728627 (SAL25L2C9)

2-door refrigerated Saladette with lid and chopping board 250lt, +2+10° C, AISI 304

Short Form Specification

Item No.

Constructed entirely in 304 AISI stainless steel. High-density expanded polyurethane foam, 45 mm in thickness, with cyclopentane injection. Height-adjustable feet. Hinged lid on top. Lower refrigerated compartment designed to accommodate GN 1/1 containers and equipped with N. 2 hinged doors. Built-in refrigeration unit. Ventilated. Refrigerant R134a. Digital control panel. Automatic evaporation of defrost water. Suitable to operate in ambient temperatures up to +32°C. Temperature range: +2+10°C. CFC and HCFC free. Supplied with n.9 horizontal container supports and n.1 non-toxic plastic chopping board.

Main Features

- Suitable for use in ambient temperatures of up to 32 °C.
- Adjustable temperature range from 2 °C to 10 °C to suit meat, fish and dairy storage requirements.
- Anti-tilt runners accept GN 1/1 containers.
- Digital control panel.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Equipped with hinged lid for non-operating periods.
- Automatic evaporation of defrost water.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).


Construction

- Mounted on legs with height adjustment.
- Built-in compressor to suit operating conditions.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Access to all components from the front.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

Optional Accessories

- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- Kit 4 wheels for 250lt refrigerated counter, saladette PNC 880267
- 1/1GN grey rilsan grid PNC 881435

APPROVAL: _____

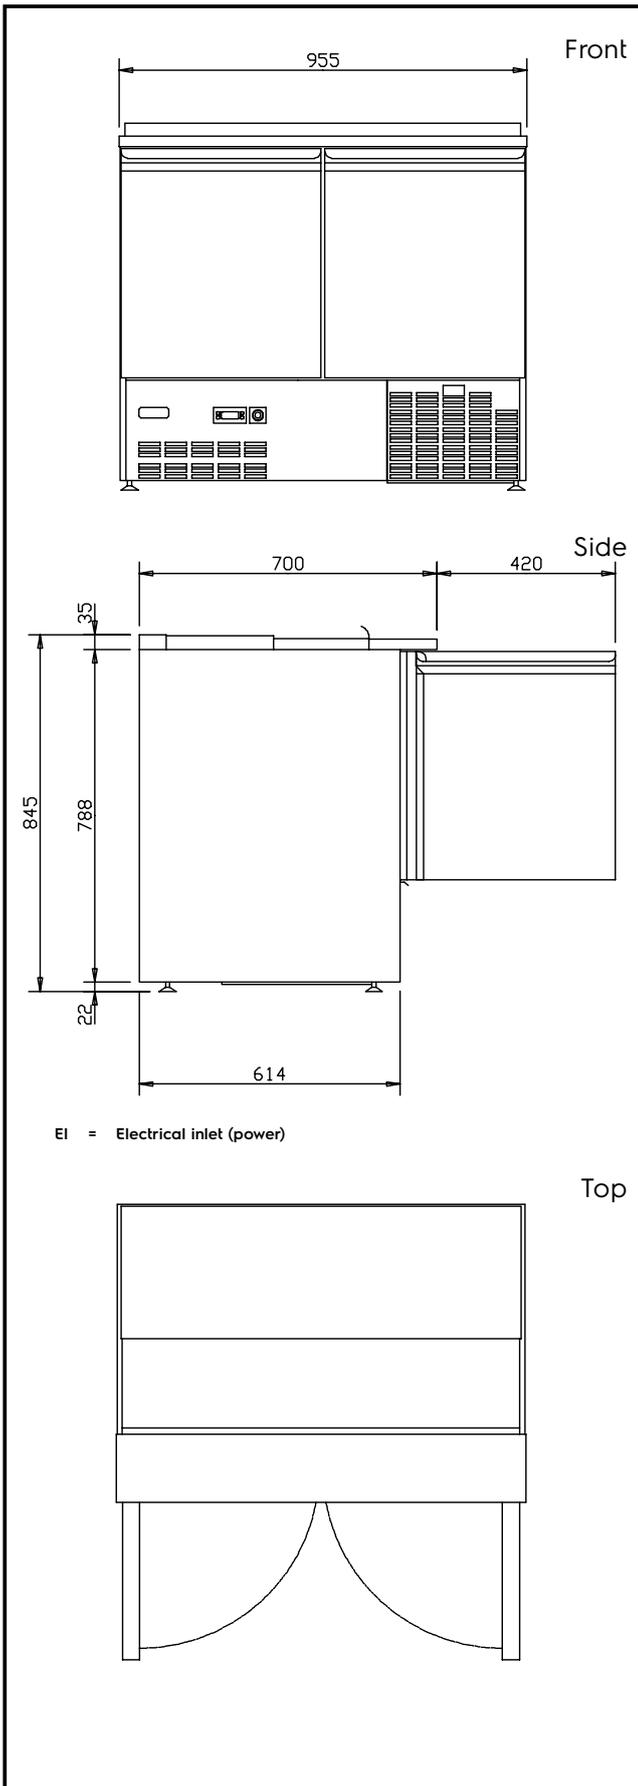

Electric

Supply voltage:

728627 (SAL25L2C9)

220-240 V/1 ph/50 Hz

Key Information:

Door hinges:

Built-in Compressor and Refrigeration Unit

External dimensions, Width: 955 mm

External dimensions, Height: 845 mm

External dimensions, Depth: 700 mm

Depth with doors open: 1120 mm

Refrigeration Data

Compressor power: 1/5 hp

Refrigerant type: R134a

Refrigeration power: 253 W

Refrigerant weight: 120 g