

 REFRIGERATOR MANUFACTURER Turbo air more durable, efficient, beautiful	4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com	Project:	
		Model #:	
		Item #:	
		Available W/H:	Qty:
		Approval:	
		AIA #:	SIS #:
		CSI Section 11400	

Roll-In Solid Door Heated Cabinet

Roll-In PRO Series

Model : PRO-42H-RI

≡ FEATURES & BENEFITS ≡

- **Digital temperature control & monitor system**

 - Keeps food products safe by maintaining constant temperatures
 - Alarm beeps when doors are not sealed
 - Early warning alarm program detects issues before malfunction occurs
 - Digital display allows for easy monitoring
 - Sensitive touch display
- **Ducted fan air distribution system**

Maintains temperature within the food zone
- **On/Off switch**

ON/OFF switch is located on control panel
- **All stainless steel cabinet construction**

The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.
- **LED interior lighting**
- **High-density polyurethane insulation**

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- **Full length stainless steel solid doors with locks**
- **Self-closing doors with stay open feature at 120 degrees**
- **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**



Model	Swing Door	CU./FT.	#of Rack Accepted	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
PRO-42H-RI	1	41.4	1	1550	13.5	453	34 x 37³/₄ x 89³/₄


Ver.20251231 Printed in U.S.A.

* Depth does not include 1-1/4" for door handles. Depth does not include 3-1/2" for ramp.

Roll-In Solid Door Heated Cabinet

Roll-In
PRO Series

Model : PRO-42H-RI

ELECTRICAL DATA	
Voltage	115V/60Hz/1Ph
Plug Type	 NEMA 5-15P
Full Load Amperes	13.5
Wattage (W)	1550
Cord Length (ft.)	8
DIMENSIONAL DATA	
# of Doors	1
# of Rack Accepted (Size (L x D x H) (in.))	1 (27 x 29 x 66)
Net Capacity (cu. ft.)	41.4
Ext. Length Overall (in.)	34 (865mm)
Ext. Depth Overall (in.)	37 ³ / ₄ (960mm)
Ext. Height Overall (in.)*	89 ³ / ₄ (2280mm)
Int. Length Overall (in.)	27 ⁵ / ₈ (702mm)
Int. Depth Overall (in.)	31 ¹ / ₂ (800mm)
Int. Height Overall (in.)	73 ³ / ₈ (1863mm)
Net Weight (lbs.)	406
Gross Weight (lbs.)	453

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles. Depth does not include 3-1/2" for ramp.


■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES


- Door lock
- Solid and sturdy grille design
- Heavy duty stainless steel ramp

PLAN VIEW

(unit : inch)

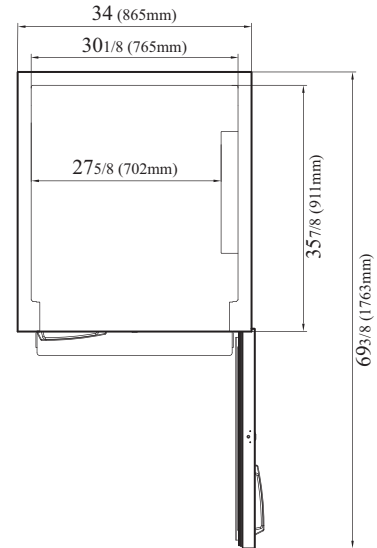

TOP VIEW

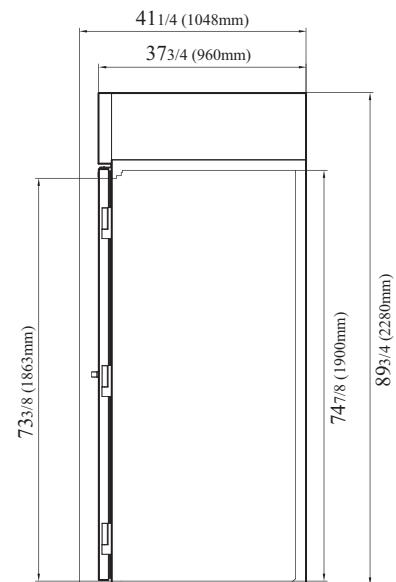

SIDE VIEW

Ver.20251231



- Turbo Air: 800-627-0032
- Bake Tech Innovation: 800-500-3519
- Warranty: 800-381-7770
- AC: 888-900-1002