

**Digital Undercounter
 ecostore HP Refrigerated Counter - 3
 Door (R290) with top, upstand and
 wheels, UK plug**


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

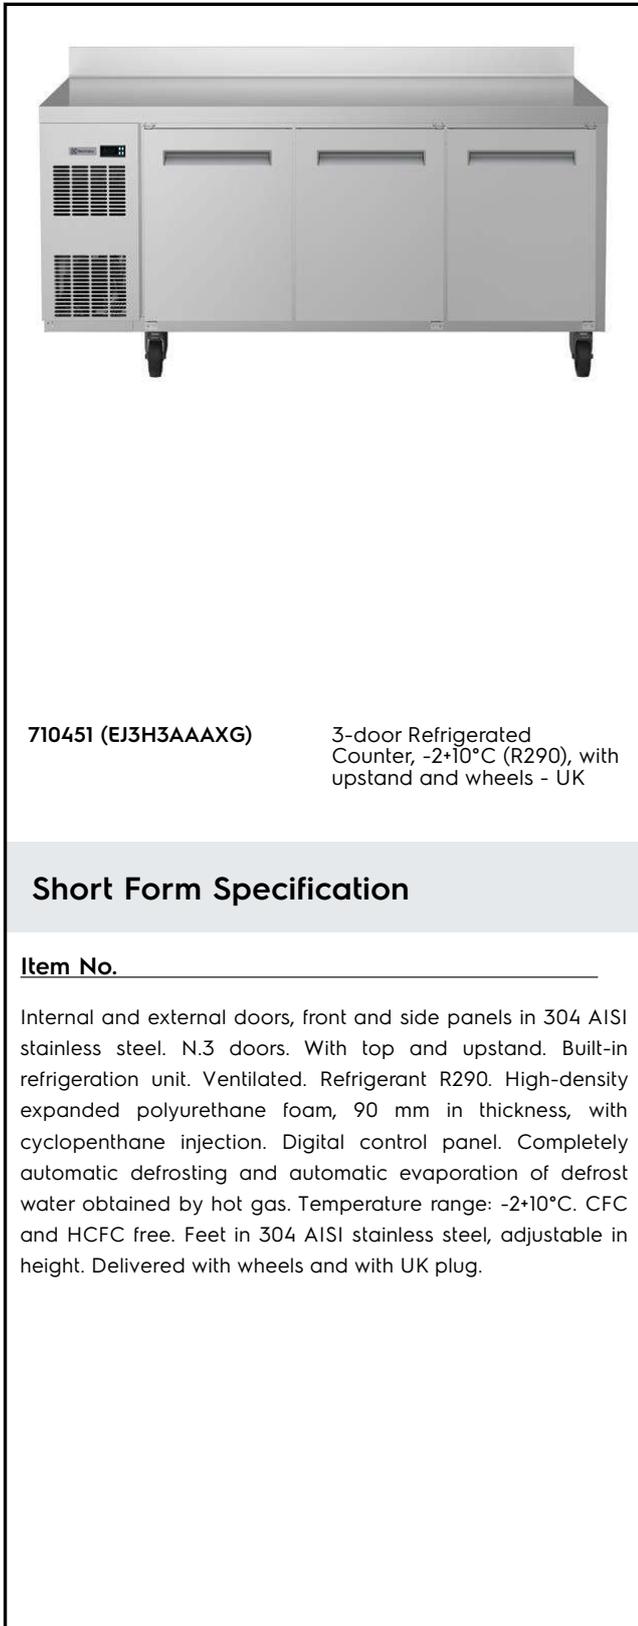
710451 (EJ3H3AAAXG)

3-door Refrigerated Counter, -2+10°C (R290), with upstand and wheels - UK

Short Form Specification

Item No. _____

Internal and external doors, front and side panels in 304 AISI stainless steel. N.3 doors. With top and upstand. Built-in refrigeration unit. Ventilated. Refrigerant R290. High-density expanded polyurethane foam, 90 mm in thickness, with cyclopentane injection. Digital control panel. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Temperature range: -2+10°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height. Delivered with wheels and with UK plug.

APPROVAL: _____

Main Features

- Tropicalized unit (43°C ambient temperature).
- This appliance is intended for use in ambient temperatures up to 40°C.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Complies with main international certification bodies and is CE marked.
- Kit 1/2 drawers available as accessory.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.
- Kit 1/3 drawers available as accessory.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

Construction

- Built-in compressor to suit operating conditions.
- CFC and HCFC free.
- Internal and external structure, bottom, doors, front and side panels, base and 50mm thick removable worktop in stainless steel.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Back panel in galvanized steel.

Included Accessories

- 3 of Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109

Optional Accessories

- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 1/1GN grey rilsan grid for refrigerated counters PNC 881107
- 2 side runners for 1/1 GN ecostore refrigerated counters PNC 881108
- Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109
- 1/1 GN plastic container, H=65 mm PNC 881110
- 1/1 GN plastic container, H=100 mm PNC 881111
- 1/1 GN plastic container, H=150 mm PNC 881112
- 2x½ drawer kit for refrigerated counters - h650mm PNC 881176



Electrolux
PROFESSIONAL


**Digital Undercounter
ecostore HP Refrigerated Counter - 3 Door
(R290) with top, upstand and wheels, UK plug**

- 3x1/3 drawer kit for refrigerated counters - h650mm (only for refrigerated counters) PNC 881177
- 1/3 and 2/3 bottle drawer kit for refrigerated counters - h650mm (only for refrigerated counters) PNC 881178
- Kit 4 wheels, H=100 mm (2 with brakes) for refrigerated counters PNC 881191
- Kit 4 wheels, H=150 mm (2 with brakes) for 2&3 compartment refrigerated counters PNC 881193
- Lock for refrigerated counters with three compartments - h650mm PNC 881246



**Digital Undercounter
ecostore HP Refrigerated Counter - 3 Door (R290) with top, upstand
and wheels, UK plug**
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2020.11.26

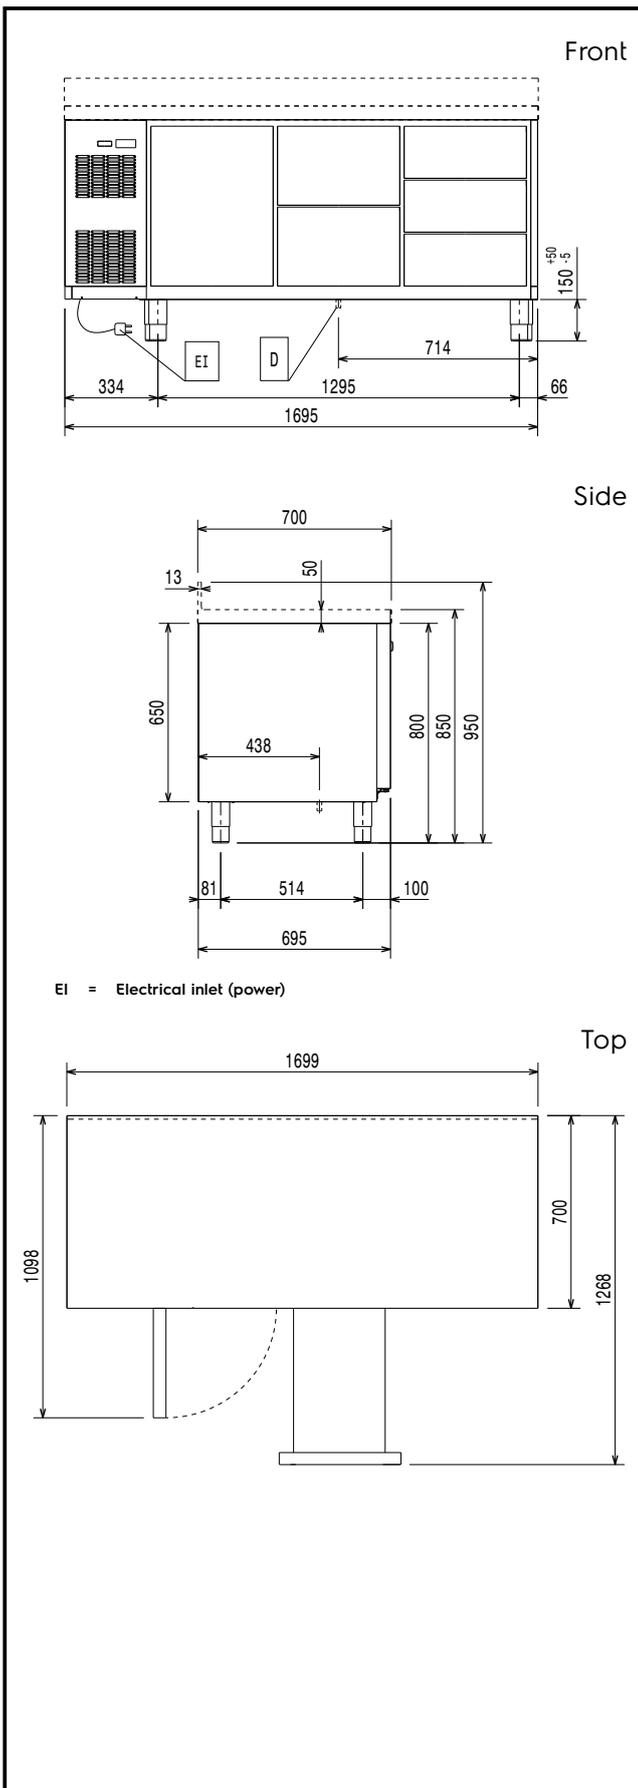

Electric

Supply voltage:
 710451 (EJ3H3AAAXG) 220-240 V/1 ph/50 Hz
 Electrical power max.: 0.22 kW

Key Information:

Gross capacity:
 Net Volume: 245.399993896484 lt
 N° of doors:
 External dimensions, Width: 1699 mm
 External dimensions, Height: 950 mm
 External dimensions, Depth: 700 mm
 Internal Dimensions (depth): 560 mm
 Internal Dimensions (height): 510 mm
 Internal Dimensions (width): 1252 mm
 Net weight: 114 kg
 Shipping volume: 1.49 m³
 Depth with doors open: 1310 mm

Refrigeration Data

Control type: Digital
 Compressor power: 1/4 hp
 Refrigerant type: R290
 GWP Index: 3
 Refrigeration power: 320 W
 Refrigerant weight: 65 g
 Min/Max internal humidity: 40/85
 Operating temperature min.: -2 °C
 Operating temperature max.: 10 °C
 Operating mode: Ventilated


Product Information (EU Regulation 2015/1094)

Energy Class: B
 Yearly and daily energy consumption: 605kWh/year - 2kWh/24h
 Climate class: Heavy Duty (5)
 Energy Efficiency Index (EEI): 25,03



Electrolux
PROFESSIONAL

**Digital Undercounter
ecostore HP Refrigerated Counter - 3 Door
(R290) with top, upstand and wheels, UK plug**

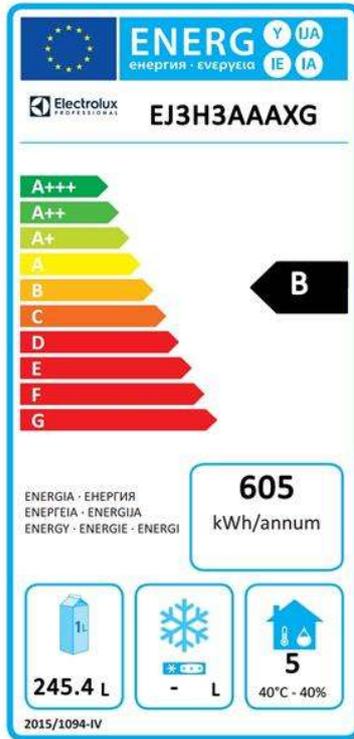

EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.



**Digital Undercounter
ecostore HP Refrigerated Counter - 3 Door (R290) with top, upstand
and wheels, UK plug**
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2020.11.26