


Item # \_\_\_\_\_

Job \_\_\_\_\_




was the very first company in the world to create and produce the concept of aluminum shelving and is the number one brand of food-grade shelving in Europe.

The shelving is of extruded and anodized aluminum construction with polymer inserts. The uprights are pre-assembled at the factory and the side rails ship with the polymer inserts. Assembly is via machined aluminum conical clamps that snap into pre-drilled holes in the uprights. The product is very easy to clean, very light, simple to assemble (no tools required), and comes with a **lifetime warranty against rust and corrosion**. We offer mobile and stationary dunnage racks. The shelving inserts are offered in 2 different options, solid and ventilated. We also have a unique capability in the industry to custom configure multiple rooms while communicating the layout specifications to the customer – thus creating MUCH less work on the part of the assembly team.

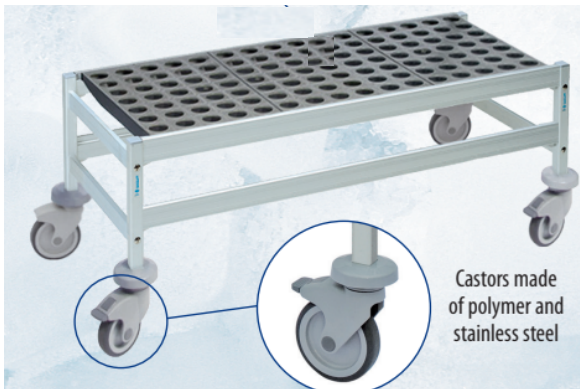

- High rigidity and stability due to (patented) assembly with conical anodized aluminium clips.
- Dunnage Rack Uprights delivered fully assembled from the factory
- Tool-less quick and easy assembly with adjustable feet
- Solid and Ventilated inserts available
- Easy cleaning via the use of removable, dishwasher-safe shelf inserts (washable up to 100°C)
- Maximum weight/level : 800 lbs. per shelf over an evenly distributed load (600 lbs. per shelf for shelves longer than 47")
- NSF Certified
- Product is packaged in pre-perforated shrink-wrapped plastic, requiring only a finger to open!
- Three depths (14", 18", and 22"), height is 12", and eight lengths (26", 31", 35", 38", 42", 47", 52", and 59", ) available.
- We have a unique capability to custom configure multiple rooms while communicating the layout specifications to the customer – thus creating MUCH less work on the part of the assembly team.
- Fermod shelving will not corrode or rust! No more complaints from health inspectors! We offer a **lifetime warranty against rust and corrosion!**



Fermod, Inc.  
5 Revere Drive  
Suite 200  
Northbrook, IL  
60062

Toll-Free : 888-484-0367  
Office : 847-231-0367  
Fax : 847-231-0366  
Website : [www.fermod.com](http://www.fermod.com)  
Email : [uscontact@fermod.com](mailto:uscontact@fermod.com)

Printed in U.S.A.

03/24

Information and specifications are subject to change without notice.

Copyright © 2024 Fermod, Inc.




**Material Specifications:**

- Dunnage rack uprights and cross-rails: Extruded, 20 micron deep anodized aluminum
- Shelf Mats: Robust and resistant food-grade polymer; machine-washer safe to 100°C
- Connector clips: Machined aluminum
- Temperature range: -40°C to 60°C (-40°F to 140°F) with intermittent exposure to 100°C (212°F) for cleaning.
- NMFC freight class code 175

**6611-6811 Dunnage Rack with Removable Shelf Inserts**

STARTER KITS Shelf Width / Length (in.)	12" Uprights	12" Mobile Uprights	Approx Unit Weight (lbs.)
14x26	1R26A12	1R26A12M	9.5
14x31	1R31A12	1R31A12M	10.4
14x35	1R35A12	1R35A12M	11.1
14x38	1R38A12	1R38A12M	11.7
14x42	1R42A12	1R42A12M	12.3
14x47	1R47A12	1R47A12M	13.1
14x52	1R52A12	1R52A12M	13.8
14x59	1R59A12	1R59A12M	14.8
18x26	1R26B12	1R26B12M	12.8
18x31	1R31B12	1R31B12M	13.6
18x35	1R35B12	1R35B12M	14.6
18x38	1R38B12	1R38B12M	14.9
18x42	1R42B12	1R42B12M	15.8
18x47	1R47B12	1R47B12M	14.8
18x52	1R52B12	1R52B12M	16.8
18x59	1R59B12	1R59B12M	18.9
22x26	1R26C12	1R26C12M	14.1
22x31	1R31C12	1R31C12M	15.1
22x35	1R35C12	1R35C12M	16.1
22x38	1R38C12	1R38C12M	16.6
22x42	1R42C12	1R42C12M	17.7
22x47	1R47C12	1R47C12M	18.5
22x52	1R52C12	1R52C12M	19.7
22x59	1R59C12	1R59C12M	21.3

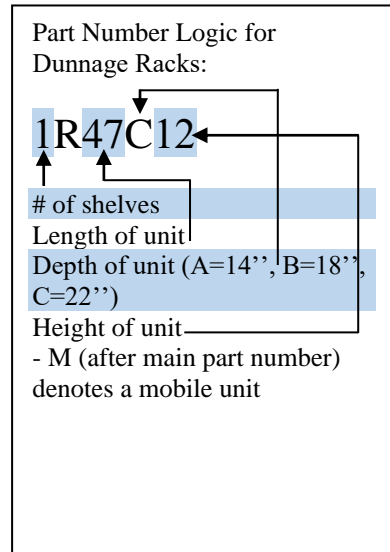

\*Complete Dunnage Rack consists of two uprights , one shelf and a horizontal shelf rail

\*\*Mobile Dunnage Rack consists of two mobile uprights , one shelf and two horizontal shelf rails

12" Uprights	Mobile Uprights	Approx Weight (lbs.)
6669111	6669111MOB	4.6
6669211	6669211MOB	4.9
6669311	6669311MOB	5.2

Fermod anodized aluminum construction shelving with removable and dishwasher safe polymer inserts. 800 lbs. maximum weight per shelf with operating temperatures between -40° F to 140° F (-40° C to 60° C). Completely tool-free assembly. 20 Micron-deep anodized aluminum construction with machined aluminum shelf clips. Polymer & stainless steel rustproof casters, NSF. Standard Lifetime Warranty against rust and corrosion. Made in France

5 Revere Drive  
Suite 200  
Northbrook, IL  
60062

Toll-Free : 888-484-0367  
Office : 847-231-0367  
Fax : 847-231-0366  
Website : [www.fermod.com](http://www.fermod.com)  
Email : [uscontact@fermod.com](mailto:uscontact@fermod.com)

Printed in U.S.A. 03/24

Information and specifications are subject to change without notice.

Copyright © 2024 Fermod, Inc.