

# FRY TOP S GAS M80 Soft Steel Plate - 1/3 Rigato - Top Thermostat Version

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1651439

MODELLO  
D94/10TSFTTG1/3R

SERIE  
DIAMANTE90



## GENERAL CHARACTERISTICS

In addition to offering the maximum choice of solutions and 2 mm thick and 90 cm deep tops, this series has all the power, robustness and functionality you need to work efficiently.  
External coatings and feet in stainless steel with Scotch Brite finish.  
Working table height adjustable from 840 to 900 mm.  
Range modularity: 200-400-600-800-1200  
Wide range of accessories.

## TECHNICAL SPECIFICATIONS

15 mm thick cooking plate totally independent of the hob .  
Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer.  
Large grease collection drawer.  
Uniform baking temperature over the entire plate.  
Optimising heat in the cooking area and increasing the comfort of operators in the kitchen.  
Plate not welded to the machine bed with optimisation of structural points under thermal stress  
Stainless steel overflow plug, supplied as an accessory, for channel flooding management  
Non-welded plate for fast maintenance and replacement in the utility  
New version with identical cooking surface area and reduced energy output.  
An increase in output per cm<sup>2</sup> allows a reduction in consumption of up to 15% compared to conventional versions  
Tubular burner with self-stabilising flame with great uniformity of heat distribution.

Floodable gutter for collecting cooking residues around the perimeter of the cooking plate easier cleaning and better retention of moisture in cooking food

Capacious grease collection drawer with capacity for the entire volume of the perimeter channel

Grooved plate design ensures cleanliness right to the end of the plate

Non-welded plate for fast maintenance and replacement in the utility

Plate not welded to the machine bed with optimisation of structural points under thermal stress

Thermal cutting that facilitates the user and adjacent machinery.

Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.

Water dispenser kit available as an accessory

# FRY TOP S GAS M80 Soft Steel Plate - 1/3 Rigato - Top Thermostat Version

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1651439

MODELLO  
D94/10TSFTTG1/3R

SERIE  
DIAMANTE90

## Technical Information

| SPECIFICATION            | DATA                                    |
|--------------------------|-----------------------------------------|
| MATERIAL                 | CR1651439                               |
| DEFINITION               | D94/10TSFTTG1/3R FTG 1/3R M80 TERM. TOP |
| COMMERCIAL LINE          | DIAMANTE                                |
| SUPPLY                   | GAS                                     |
| DIM. WIDTH               | 800 mm                                  |
| DIM. PRODUCTIVITY        | 900 mm                                  |
| DIM. HEIGHT              | 250 mm                                  |
| NET WEIGHT               | 98,000 Kg                               |
| VOLUME (net)             | 0,180                                   |
| PACKAGE LENGTH           | 840,000 mm                              |
| PACKAGE WIDTH            | 1020 mm                                 |
| PACKAGING HEIGHT         | 550,000 mm                              |
| PACKAGE VOLUME           | 0,476 m3                                |
| GROSS PACKING WEIGHT     | 108,000 Kg                              |
| GAS POWER                | 20,00                                   |
| GAS POWER (G25.3/25mbar) | 20,00                                   |
| CERTIFIED MODEL          | D94/10TSFTTG                            |

# FRY TOP S GAS M80 Soft Steel Plate - 1/3 Rigato - Top Thermostat Version

Project: .....  
Rev: .....  
Zone: .....  
Location: .....




CODICE  
CR1651439

MODELLO  
D94/10TSFTTG1/3R

SERIE  
DIAMANTE90

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

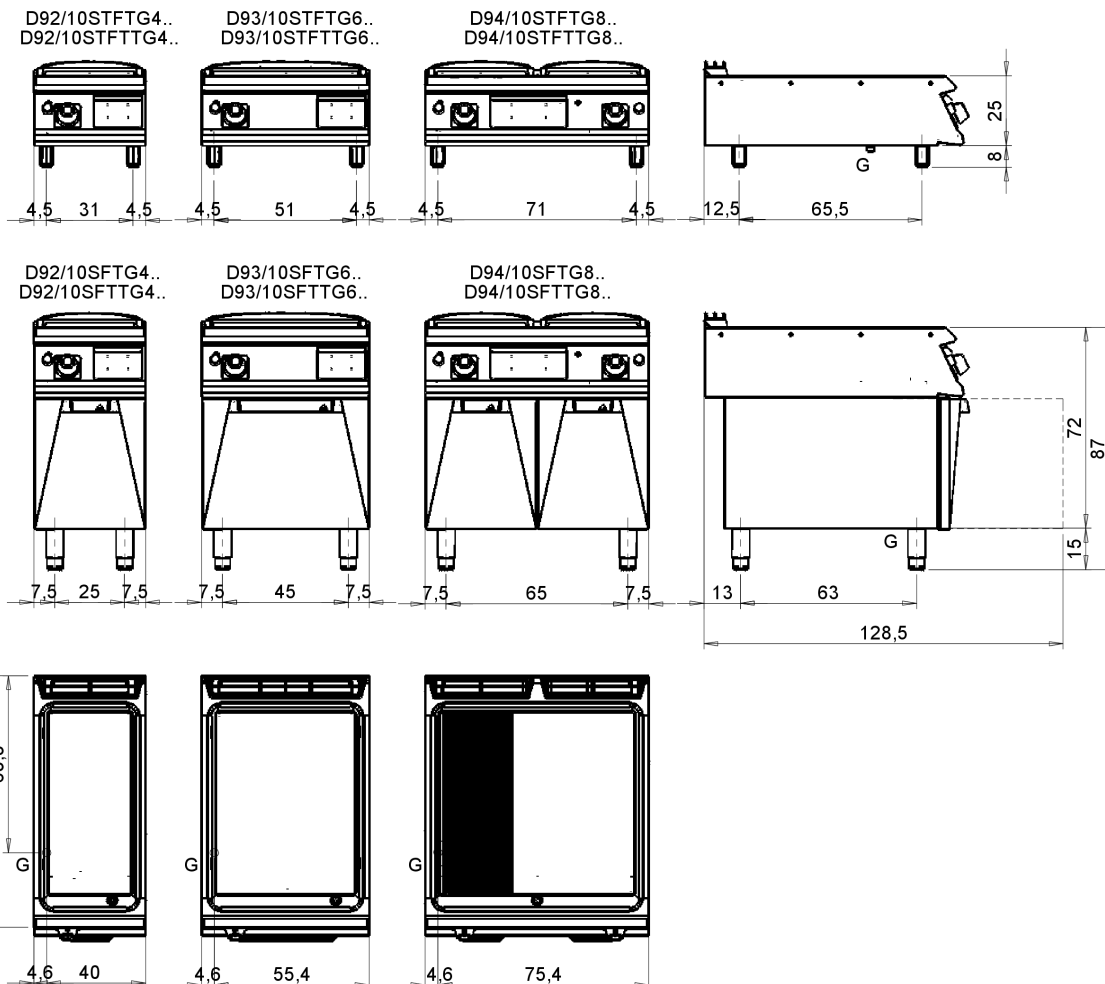

## Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

|                                                                                                                                                                                                                                                      |                                                                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwarte - Entrada cabo eléctrico                                                                   | <b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás<br><b>EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)</b> |
| <b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água                                                                                                         | <b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água                                  |
| <b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba                                                                                                                         | <b>A1</b> = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno<br><b>A2</b> = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio                               |
| <b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão                                                                                   |                                                                                                                                                                     |
| <b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto |                                                                                                                                                                     |
| <b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno                                                                                                                                      | <b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível                                       |

# FRY TOP S GAS M80 Soft Steel Plate - 1/3 Rigato - Top Thermostat Version

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1651439

MODELLO  
D94/10TSFTTG1/3R

SERIE  
DIAMANTE90


## Product's PLUS




Plate not welded to the machine bed  
with optimisation of structural points  
under thermal stress




Capacious grease collection drawer  
with capacity for the entire volume of  
the perimeter channel



Thermal cutting that facilitates the user  
and adjacent machinery.




Grooved plate design ensures  
cleanliness right to the end of the plate



Uniform cooking temperature across  
the entire plate. Optimising heat in the  
cooking area and increasing operator  
comfort in the kitchen.



Non-welded plate for fast maintenance  
and replacement in the utility



Water dispenser kit available as an  
accessory

FRY TOP S GAS M80 Soft Steel Plate - 1/3 Rigato -  
Top Thermostat Version

|           |                  |            |
|-----------|------------------|------------|
| CODICE    | MODELLO          | SERIE      |
| CR1651439 | D94/10TSFTTG1/3R | DIAMANTE90 |

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



Water dispenser kit available as an accessory

# FRY TOP S GAS M80 Soft Steel Plate - 1/3 Rigato - Top Thermostat Version

Project: .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1651439

MODELLO  
D94/10TSFTTG1/3R

SERIE  
DIAMANTE90

## ACCESSORIES

| CODE      | MODELLO   | DESCRIZIONE                       |
|-----------|-----------|-----------------------------------|
| CR1354989 | PRPC      |                                   |
| CR1354999 | PKLR      |                                   |
| CR1356399 | RPR       | Striped chrome plate scraper      |
| CR1658629 | D97CPFT68 | Fry top cleaning drawer M60 - M80 |
| CR1658609 | 97TFT     |                                   |
| CR1658689 | D9AFT8    |                                   |
| CR1659159 | Q94GKSCFT |                                   |
| CR1658839 | Q794CAFT  |                                   |