



# C SERIES

## 3-SECTION COMPACT SOLID DOOR UNDERCOUNTER FREEZER



|               |           |          |
|---------------|-----------|----------|
| Project Name: | Location: | AIA #:   |
| Item #:       | Qty:      | Model #: |
|               |           | SIS #:   |

### C SERIES - STAINLESS STEEL EXTERIOR & INTERIOR



#### 72" WIDE MODELS

CLUC-72F-SD-LRR Hinged Left/Right/Right  
 CLUC-72F-SD-RRR Hinged Right/Right/Right  
 CLUC-72F-SD-LLL Hinged Left/Left/Left  
 (-LK suffix indicates locks installed)



ENERGY STAR® Listed Commercial Freezer  
 For full listing visit [energystar.gov](http://energystar.gov)

### SPECIFICATIONS

#### DIMENSIONAL DATA

|                                 |                    |
|---------------------------------|--------------------|
| Capacity cu. ft.                | 18.8 (532.4 cu l)  |
| Length in.                      | 72-3/16 (183.4 cm) |
| Depth in.                       | 31-1/2 (80 cm)     |
| Overall Height in. <sup>2</sup> | 34 (86.4 cm)       |

#### ELECTRICAL DATA

|                         |          |
|-------------------------|----------|
| Horsepower <sup>1</sup> | 1/2      |
| Amps                    | 7.0      |
| Voltage                 | 115/60/1 |
| NEMA                    | 5-15P    |

#### REFRIGERATION DATA

|                   |              |
|-------------------|--------------|
| Refrigerant       | R-290        |
| Charge Amount oz. | 2.9 (82.2 g) |
| BTU               | 1750         |


When ordering please specify:  
 Voltage, Hinging, and Options



NEMA 5-15P

1. Based on 90°F ambient & 20°F evaporator.
2. Overall height includes 4" (10.2 cm) for casters.

### PLAN VIEW

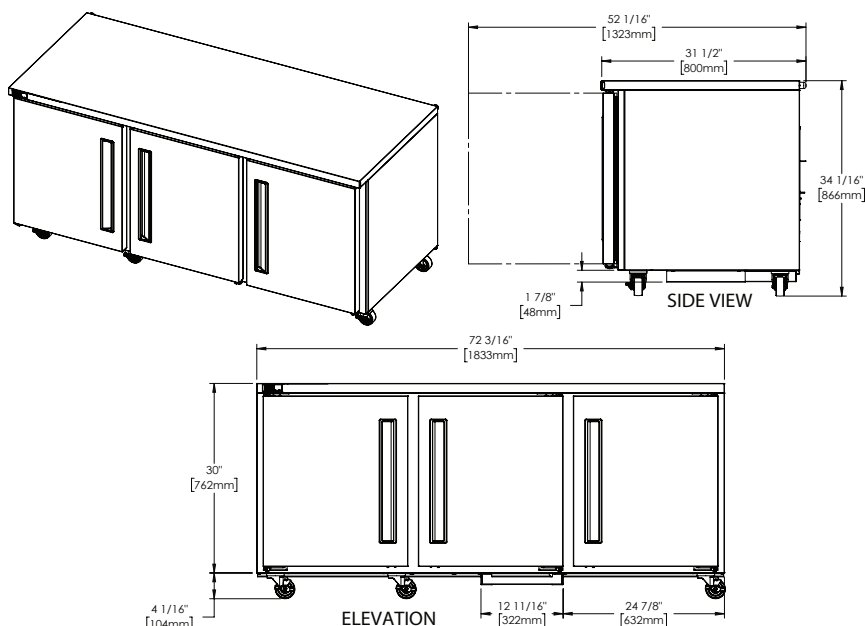

Models listed to applicable UL, CSA, and NSF standards by an approved NRTL. Consult the factory or unit data plate for additional information.

Specifications subject to change without notice. Chart dimensions are rounded up to the nearest 1/16" (centimeters rounded up to the nearest tenth).



# C SERIES

## 3-SECTION COMPACT SOLID DOOR UNDERCOUNTER FREEZER



|               |           |          |        |
|---------------|-----------|----------|--------|
| Project Name: | Location: |          | AIA #: |
| Item #:       | Qty:      | Model #: | SIS #: |

### REFRIGERATION SYSTEM

- Self-contained, rear-mounted system uses environmentally friendly, minimal GWP R-290 refrigerant
- Front-breathing system allows zero-clearance installation
- Easy access to condenser coil for cleaning
- High performance, balanced system operates at -3 to 3°F (-19 to -16°C) to maintain consistent, food-safe temperatures
- LED display for microprocessor control is water-resistant
- Capillary tube metering device

### CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Exterior top, back, and bottom is constructed of heavy gauge galvanized steel
- Cabinet is insulated with an average of 2-3/8" (6.03 cm) thick high density, non-CFC foamed-in-place polyurethane
- A set of (6) 4" (10.2 cm) high casters; (3) with brakes, (3) without brakes; factory-installed
- 9' cord & plug provided

### DOORS

- Foamed-in-place, recessed handles
- Doors are self-closing with a stay-open feature
- Magnetic, snap-in door gaskets
- Gasket-protecting retainer
- Field-reversible
- -LK suffix following model number indicates door locks installed

### INTERIORS

- (2) adjustable, epoxy coated wire shelves per section supported on pilasters

### FIELD-INSTALLED OPTIONS

- Additional epoxy coated shelves on pilasters
- Single overshef, 72"W x 18"H x 16"D (CLUCACC-72OSHSELF)
- Set of (6) 6" (15.2 cm) legs
- Set of (6) 6" (15.2 cm) casters
- Set of (6) 2-3/4" (7 cm) casters

### WARRANTY

- Six-year parts and labor warranty
- Seven-year compressor parts warranty



<https://traulsen.klclcad.com>

|              |              |       |
|--------------|--------------|-------|
| Approved by: | Approved by: | Date: |
|--------------|--------------|-------|