Addenda

Self-Service Bread Wall

Structural Concepts®
DELIVERING FRESH. ALWAYS.™

- **CB5082** 50-1/2"L x 43-5/8"D x 82-3/4"H
- **CB7282** 72"L x 43-5/8"D x 82-3/4"H



CB5082

Included

- CB5082 Supplied w/ (9) 16" x 12" x 4" & (3) 12" DIA x 20" wicker baskets
- CB7282 Supplied w/ (12) 16" X 12" X 4" & (4) 12" DIA X 20" wicker baskets
- Electrical leads
- LED 3500K w/ frosted lens
- Levelers
- One year parts & labor warranty
- Shelving removable and adjustable on 1" centers

Specify	Standard Features	Additional Options
EXTERIOR COLOR	• Laminate (stock colors)	• Laminate (non-stock colors)
INTERIOR COLOR	• Black	
BASE	• Straight base	
BUMPER FRONT	• 1" Boston bumper (specify color)	
END PANELS	• Cutaway end panel	
SHELVING	• (3) Lighted solid shelves	
MISCELLANEOUS		• Second year parts & labor warranty
ACCESSORIES		• Price tag molding (matches interior color)


Addenda


Self-Service Bread Wall

Structural Concepts®
DELIVERING FRESH. ALWAYS.™


Intended Environment:	Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
Zone	**Intended Product To Be Displayed**	**Warmest Avg Prod Temp ° F**
1	Packaged non-refrigerated products	Ambient

PLAN VIEW

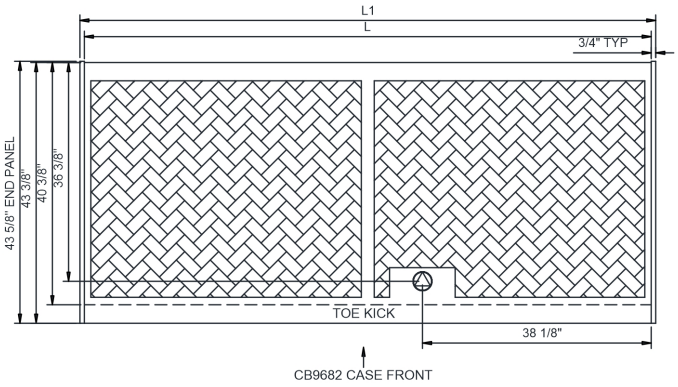

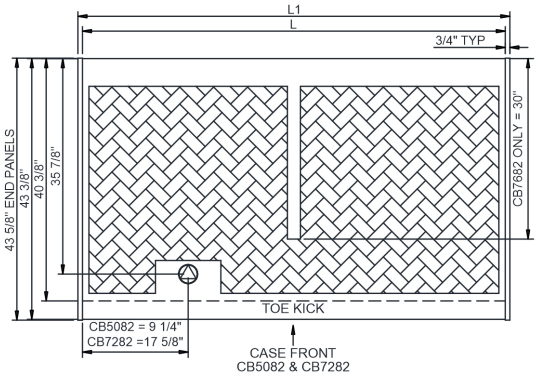

SIDE VIEW

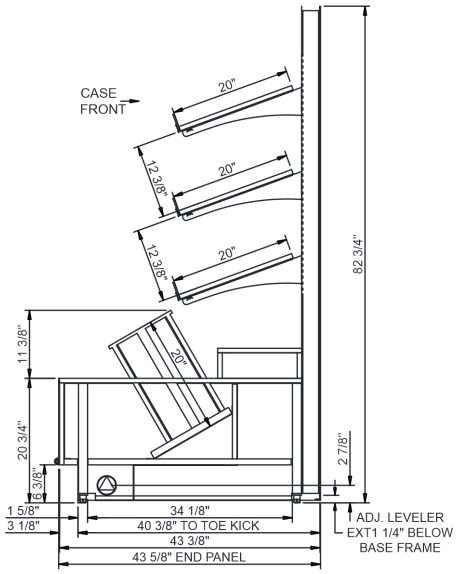

NOTE: ALL DIMENSIONS APPROXIMATE

ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
REFRIGERATION LINE CONNECTION.
REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
SELF-CONTAINED CASE SERVICE ACCESS AREA.
DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
CB5082	49.00	50.50	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	0.70	17	2+G	Leads Single	N/A	N/A	N/A	725
CB7282	70.50	72.00	.00	Ambient/Lights (N/A)	Circuit #1	110-120	1	60	0.70	24	2+G	Leads Single	N/A	N/A	N/A	975

*** Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	ETL Listed to UL 65

DOE 2017 Energy Efficiency Compliant

Important Notes:

1) Units are supplied with levelers which must be adjusted during installation to ensure the unit is level and plumb.

⚠ **WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Placement of Case

Consider where the display case will be positioned relative to walls, ceilings, HVAC vents, windows, and other equipment discharging warm air.

The 5′ - 10′ - 15′ Rule

Stay 5′ away from an exterior window

Direct sunlight increases the heat load on the front of the display resulting in the refrigeration system having to work harder and possible condensation on the case.

Remain 10′ away from HVAC ceiling vents

Air blowing on the front of the display interrupts the air curtain and causes product temperatures to increase.

Minimum 4″ clearance to walls & ceilings.
Refer to spec sheets & design guide for further information.

With service display cases that have a glass front, air blowing on the front glass causes condensation to develop.

Position the display 15′ away from exterior doors

Air drafts from the front exterior doors interrupt the air curtain, allowing warm air to penetrate the inside of the display, affecting product temperature.

