



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.toplineplumbing.com

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

TOP-LINE PART NO. _____

TOP-LINE® Low Lead 8" OC Wall Mount
Faucet with Tubular Swing Spout and
Quarter Turn Ceramic Valves

TLL13-81xx-SE1 Series

TLL13-8106-SE1 6" spout
TLL13-8108-SE1 8" spout
TLL13-8110-SE1 10" spout
TLL13-8112-SE1 12" spout
TLL13-8114-SE1 14" spout
TLL13-8116-SE1 16" spout

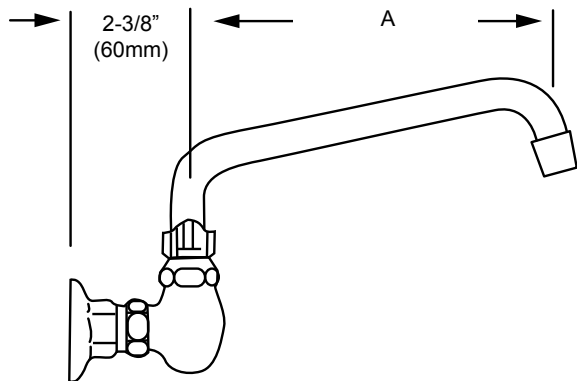

Dimensions shown in inches (mm) are for reference only
and are subject to change.

1-1/8" (29mm) holes for wall are recommended to
accommodate 1/2" supply nipples.

1/2" NPS Male Inlets

Operating Temperature: 40 - 180°F (5 - 83°C)

Operating Pressure: 15 - 125psi

Approximate shipping weight - 4 lbs

Warranty - 1 year

Solid heavy duty low lead cast body is specification and commercial quality.

Commercial Quality Features

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel tubular swing spout
- ADA-compliant lever handles
- Leak proof double O-ring spout design
- Gaskets and seals rated to 180°F

SPECIFICATIONS:

Low Lead 8" OC Wall Mount Faucet to be TOP-LINE TLL13-81xx-SE1
Series in the following configuration:

- _____ TLL13-8106-SE1 6" spout
- _____ TLL13-8108-SE1 8" spout
- _____ TLL13-8110-SE1 10" spout
- _____ TLL13-8112-SE1 12" spout
- _____ TLL13-8114-SE1 14" spout
- _____ TLL13-8116-SE1 16" spout

Faucet body to be constructed of polished chrome plated brass. Valves to
be quarter turn ceramic type. Handles to be lever style. Spout to be stainless
steel tubular swing style with leak proof double O-ring seal design. Aerator to
be 2.2gpm @ 60psi standard.

Model No.	A
TLL13-8106-SE1	6" (152mm)
TLL13-8108-SE1	8" (203mm)
TLL13-8110-SE1	10" (254mm)
TLL13-8112-SE1	12" (305mm)
TLL13-8114-SE1	14" (355mm)
TLL13-8116-SE1	16" (406mm)



NSF - 61/9-372 - U.P. Code
ASME A112.18.1/CSA B125.1

