



SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR

Self-Contained Pass-Thru Refrigerators are offered with 1, 2, or 3 doors on each side for easy access to product from either side.

Job:
Area:
Item #:
Model #:



PTS36 shown



PTS60 shown



SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR

MODEL NUMBER
PTS36
PTS60
PTS84

Feature-Benefits

- Provides easy access from both sides and are offered in glass swing door or sliding doors-closing and can be propped open for easy stocking
- NSF/ANSI Standard 7 Listed for open food, beverage, and garnish storage
- Multiple door styles available in any compartment; choose between glass, stainless-steel, black, or customer provided overlay
- Integrated door locks standard on all units
- Optional condensing unit available
- NSF Rated digital controller allows for easy and precise temperature changes
- Choose between three temperature ranges; Refrigerator (34°F-42°F) Factory set to 38°F, White Wine (40°F-65°F) Factory set to 45°F, Red Wine (40°F-65°F) Factory set to 60°F
- Choose between 6000K white LED lighting or cool blue display lighting
- Choose between flat shelving and wine racks for each compartment
- Choose between full length, 6" chrome, or pull tab style handles



800.558.5592

perlick.com



MODEL NUMBERS - PTS36, PTS60, PTS84

SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR

MODEL NUMBERS		PTS36	PTS60	PTS84
NUMBER OF DOORS		2	4	6
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	36 (914)	60 (1524)	84 (2134)
	Depth - in. (mm)	26 ¹¹ / ₁₆ (678)	26 ¹¹ / ₁₆ (678)	26 ¹¹ / ₁₆ (678)
	Height - in. (mm)	34 ⁹ / ₁₆ (878)	34 ⁹ / ₁₆ (878)	34 ⁹ / ₁₆ (878)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	20 (508)	44 (1118)	68 (1727)
	Depth - in. (mm)	18 ³ / ₄ (476)	18 ³ / ₄ (476)	18 ³ / ₄ (476)
	Height - in. (mm)	31 (787)	31 (787)	31 (787)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		8.0 (227)	17.4 (493)	26.7 (756)
PRODUCT CAPACITY	CASE PACKED - 12 OZ. BOTTLE/CAN	182/273	371/553	581/868
	STAGGERED - 12 OZ. BOTTLE/CAN	196/292	400/592	628/932
SHIPPING WEIGHT Lbs. (kg.)		264 (120)	354 (161)	496 (225)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.8	2.5	4.2
	Electrical Connection	Cord connected	Cord connected	Cord connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15	NEMA 5-15
	Cord Length	6'5"	6'5"	6'5"
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle	Off cycle
	Thermostat	Digital control	Digital control	Digital control
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Horsepower	1/6	1/5	1/4
	Refrigerant	R290	R290	R290
	Refrigerant Charge gm.	90	100	90
	Factory Temperature Setting-Refrigerator F (C)	38° (3.3°)	38° (3.3°)	38° (3.3°)
	Temperature Range-Refrigerator F (C)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)	33°-40° (0.5°-4.5°)
	Factory Temperature Setting-White Wine F (C)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)	50°-55° (10.0°-13.0°)
	Factory Temperature Setting-Red Wine F (C)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)	60°-65° (15.5°-18.0°)
	Temperature Range-Wine F (C)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)	50°-65° (10.0°-18.0°)
	Condensing Unit Location	Left or Right	Left or Right	Left or Right
	Expansion Device	Capillary tube	Capillary tube	Capillary tube
	Pull Out Condensing Unit	Yes	Yes	Yes
	Front Vented	Yes	Yes	Yes
PLUMBING	Floor Drain Included	Yes	Yes	Yes
	Evaporator Condensate	Automatically	Automatically	Automatically




800.558.5592

perlick.com



SELF-CONTAINED PASS-THRU BACK BAR REFRIGERATOR

MODEL NUMBERS - PTS36, PTS60, PTS84

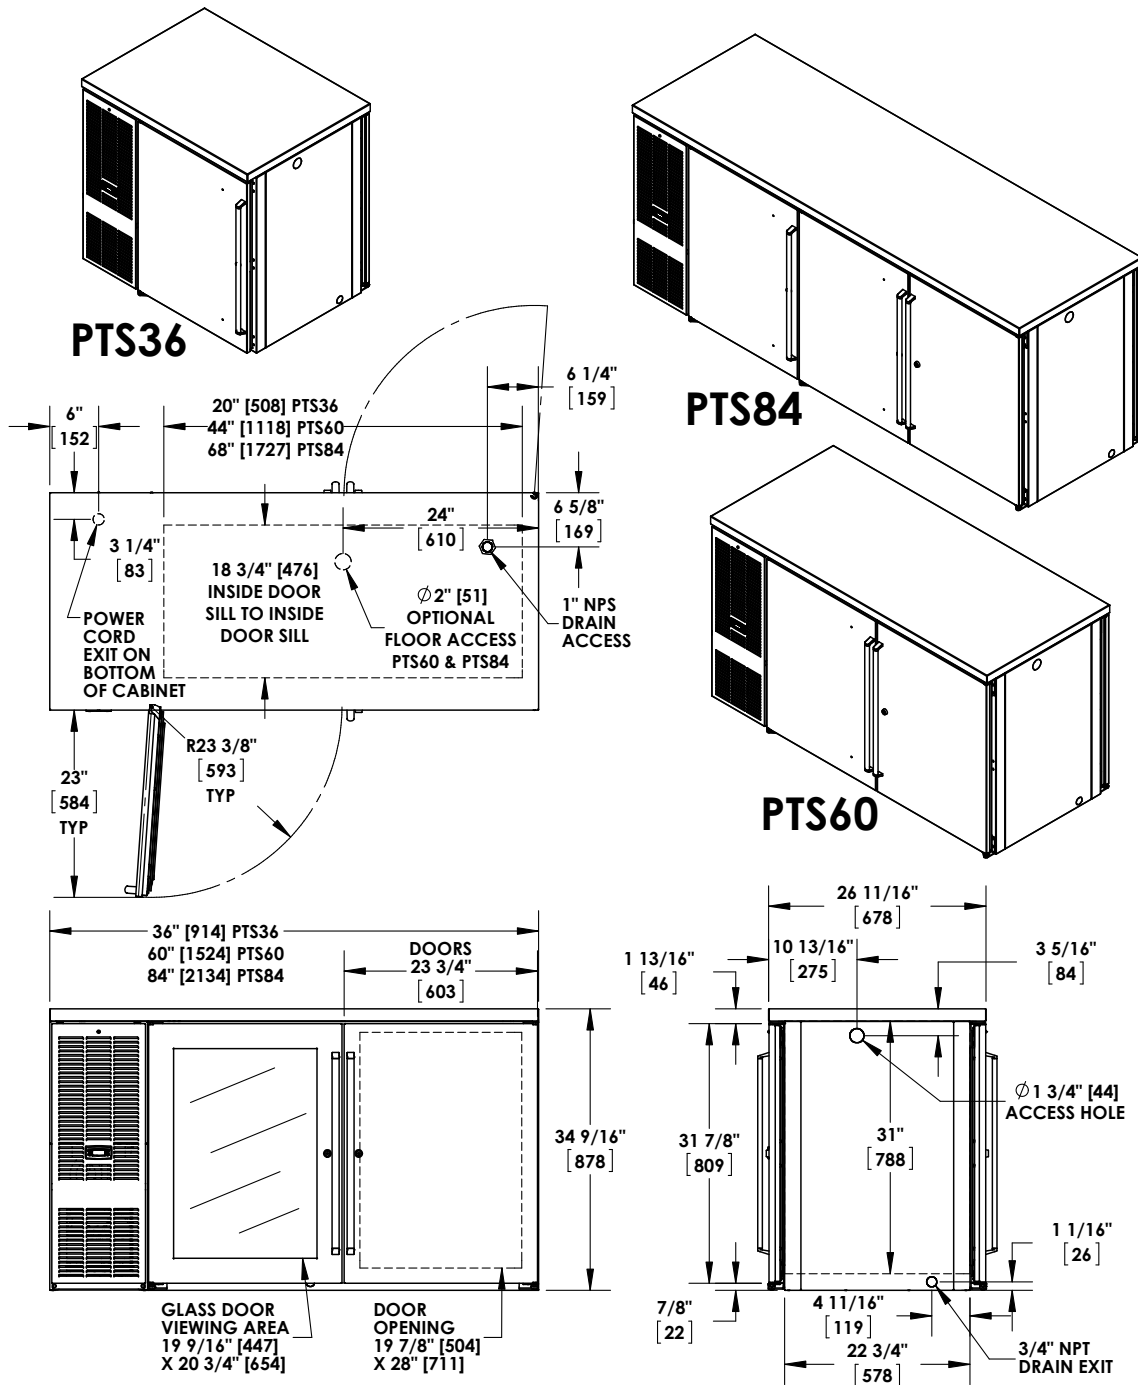

800.558.5592

perlick.com