

## Culino 80E Static Jacketed Kettle

Model – Culino 80E (4215204)

### FEATURES

- Culino static jacketed kettle
- Electric heated version
- 316 Stainless steel bowl
- Flat panel digital controls
- Food temperature control (option)
- Multifunction timer (option)
- Automatic measured water filling (option)
- Electric tilting
- Measuring stick
- Hand shower (option)
- Strainer plate (option)

Please refer to Metos website for options and accessories




### TECHNICAL DATA

Net Volume	80L	Electrical	Power 16 kW
Spare Volume	10.5 L		Voltage 400-415V,
Gross Volume	90.5 L		3P+N+E 50/60Hz
Dimensions			AMP 25A
Width	1154mm	Total Heat	16kW
Height	1039mm	Load	Latent 0.6 kW,
Depth	792mm		Sensible 2.6 kW
Connections		Waste	By kitchen
Water	Cold ø15mm		contractor
	Hot ø10mm	Net Weight	192 kg

NOTE - Mandatory installation kit required for all installations, options are:

Single kettle surface – 4215837  
 Single kettle subsurface – 4215838  
 Group kettle surface – 4215845  
 Group kettle subsurface - 4215846

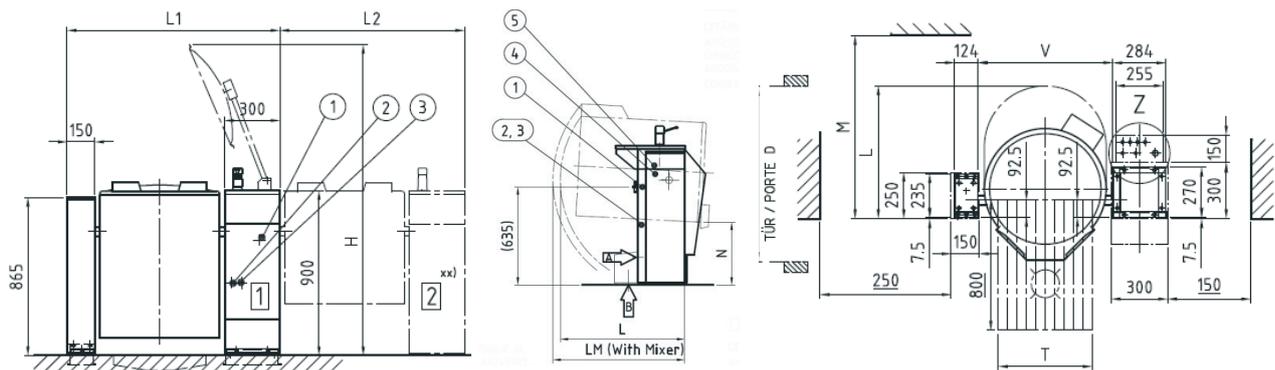

Finland  
[metos.com/manufacturing](http://metos.com/manufacturing)

Metos Oy Ab  
 Ahjonkaarre  
 FI 04220 Kerava  
 Finland  
 Telephone +358 204 3913  
[international.sales@metos.com](mailto:international.sales@metos.com)

- (1) Electrical connection
- (2) Cold water connection
- (3) Hot water connection
- (4) Data cable (HACCP option)
- (5) Control cables to building for heating control of kettle

Model	L1 mm	L2 mm	M mm	L mm	LM mm	H mm	T mm	D mm	N mm	V mm
80E	1154	1004	1080	710	850	1800	500	785	405	720

Disclaimer: All unit capacities are based on subjective testing.

In line with policy to continually develop and improve its products, Metos Oy Ab reserves the right to change specifications and design without notice.