



Catalogue
FOOD SERVICE
Chapter
COOKING

Model
C-GP910 NG

19075574


28/02/2020

PAELLA COOKER C-GP910

- Deep-drawn cooktop manufactured in 2 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- Double-crown burner with four rows of flames per crown, guaranteeing an even distribution of heat from the flame to the base of the pan.
- Low-consumption pilot light and thermcouple.
- Flexible stainless steel gas pipes, facilitating internal manipulation in order to make repairs easier.
- Controls with a protective support base and system to prevent water infiltration.
- High-temperature enamelled cast iron flue protector which is flush with the grates therefore improving manoeuvrability, supporting larger containers and increasing the usable surface area.
- Access to components from the front.
- Machine with one 27 kW burner in the cooktop with an 450 mm diameter outer crown and a 330 mm diameter inner crown.

DIMENSIONS

X Width	800 mm	X Gross width	840 mm
Y Depth	930 mm	Y Gross depth	1022 mm
Z Height	290 mm	Z Gross height	535 mm
Net Weight	72,0 kg	Gross Weight	84,0 kg
Net volume	0,222 m3	Gross volume	0,459 m3





ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage	N/A
Electric frequency	N/A



GAS TECHNICAL SPECIFICATIONS

Gas type	NG
Gas power	27,00 kW
Gas consumption	2,830 m3/h
Regulated	NG G20/G25/G25.1 20/25/25 mbar

C-GP910

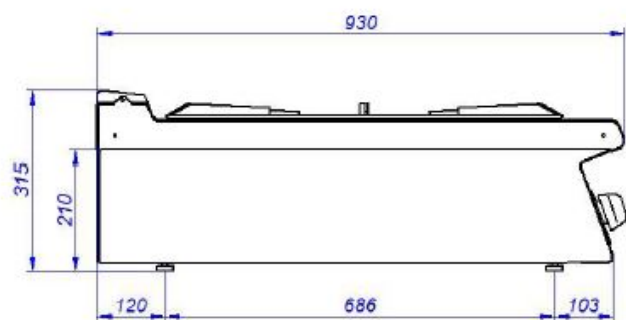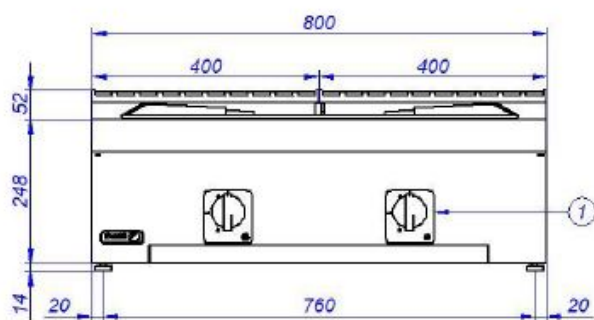

C-GP911

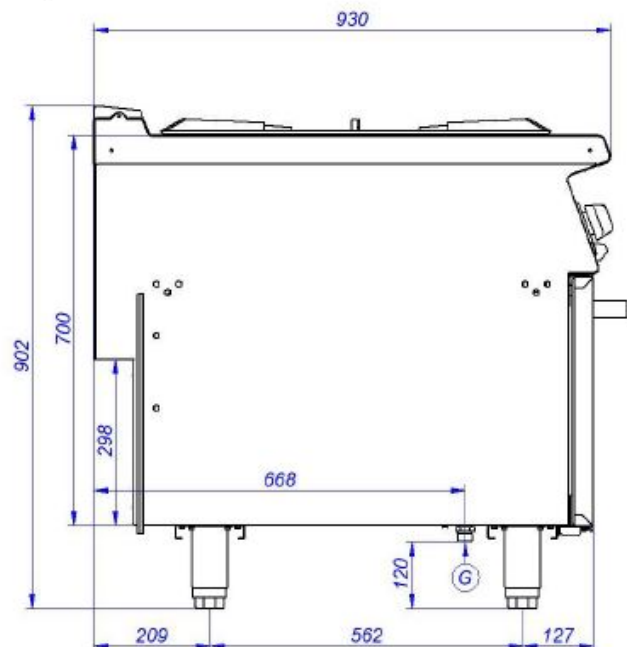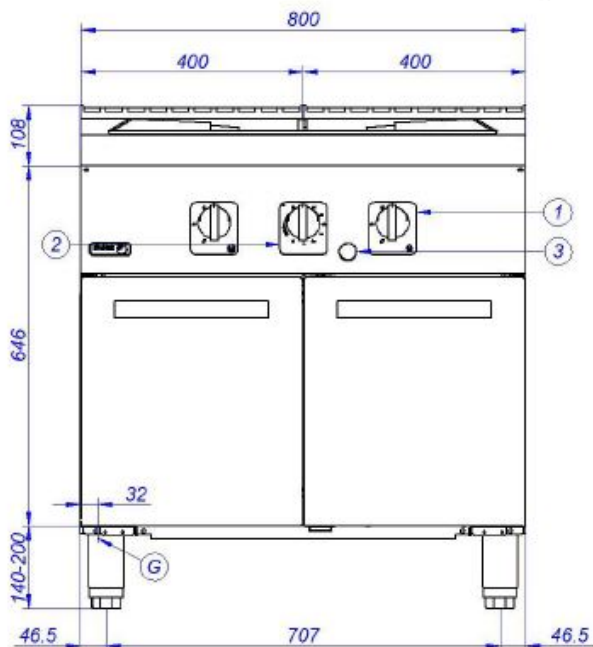

- G. Entrada de Gas
1. Válvula de gas
2. Vávula de gas del horno
3. Pulsador tren de chispas

- Gas inlet
Gas valve
Oven gas valve
Piezoelectric ignitor