



## PRODUCT FEATURES

- Dual purpose used wet or dry
- Auto Fill - Dry elements
- Overhead halogen lights with adjustable dimmer
- Full size pans 65mm deep supplied ( max 100mm )

## GASTRO PANS



Units supplied with 1/1 pans at 65mm deep, max pan depth is 100mm

## ELECTRICAL POWER



Electrical power cord 3000mm 1 phase connection required.  
Unit must be hard wired on site to isolation switch.

## WATER DRAINAGE

Screw on stop cock valve drain pipe  
Ideally drain connected to waste. 90deg<sup>C</sup> rated pipe  
Overflow flexible waste pipe 19mm dia.1000 mm length from spigot must be connected to waste.

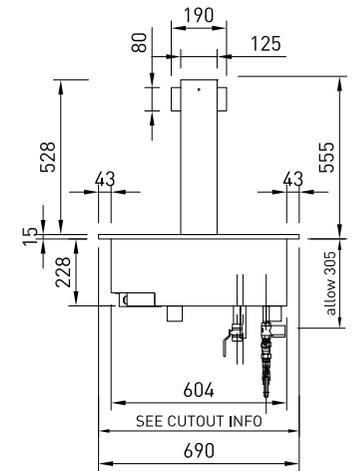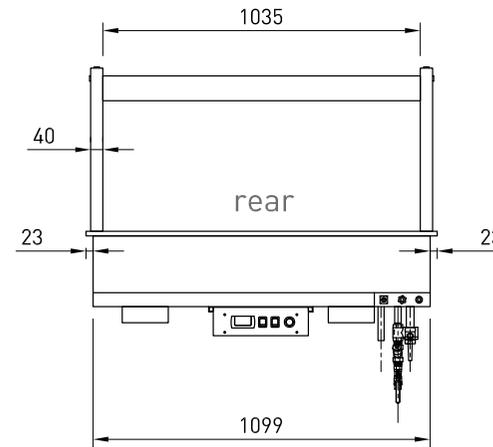

LSBM LEFT SIDE ELEVATION

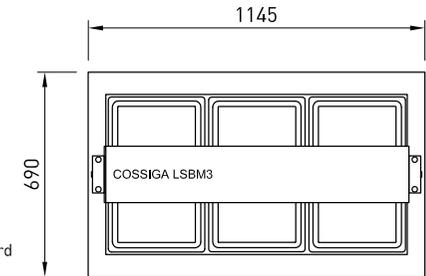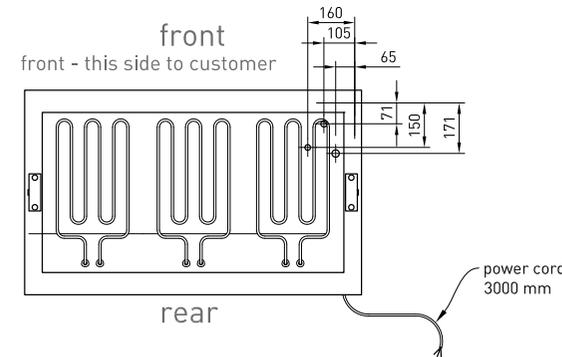

## CABINET DIMENSIONS & SPECIFICATIONS

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

**\*ASSEMBLY REQUIRED**

MODEL	CABINET					PANS	WATER FILL	TEMP	DISPLAY AREA	POWER		CONNECTION ELECTRICAL POWER CORD 3000MM	VOLTAGE	PACKED FOR SHIPPING			
	LENGTH [MM]	DEPTH [MM]	HEIGHT [MM]	WEIGHT [KG]	CUT OUTS					LITERS	DEG C			M2	KW 230V	AMPS WITH LAMP	NZ/AUS/UK
LSBM3	1145	690	555	86	1120X635	3 x 1/1 65mm Gastro Pans	57	75 -95	0.53	3.45	15	20 AMP LEAD ONLY	220~240V	1250	770	670	86