




URC-14KZ

REMOTE CONDENSER SERIES

URC-14KZ
09/16/26
Item # 13084K

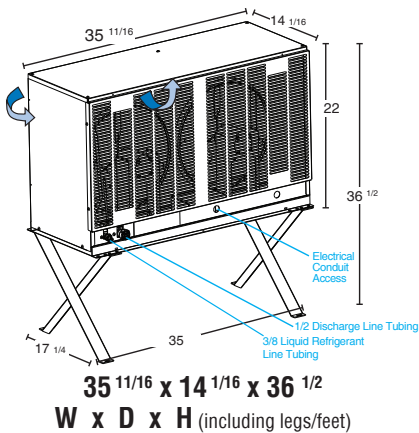

- Remote condensers for KM Series Cubers and F Series Flakers/Cubelets
- Quiet operation
- Improved efficiency; Energy savings
- Weather resistant cabinet for longer life
- May be installed outdoors up to 55 feet from icemaker using a pre-charge tubing kit
- For installations exceeding 55 feet, contact Factory Service Department

Discharge and liquid refrigerant lines dimensions refer to the line set tubing.




Tubing Kits

(Sold Separately)
Refer to SPECIFICATIONS table to determine appropriate Tubing Kit Number for Remote Condenser Unit Specified.

REMOTE CONDENSER INSTALLATION ON ROOF

For best performance allow 24 inch clearance for air circulation. Remote condenser should not be more than 33 feet above the KM/F Icemaker or no more than 10 feet below it. These distances are measured from fitting to fitting.

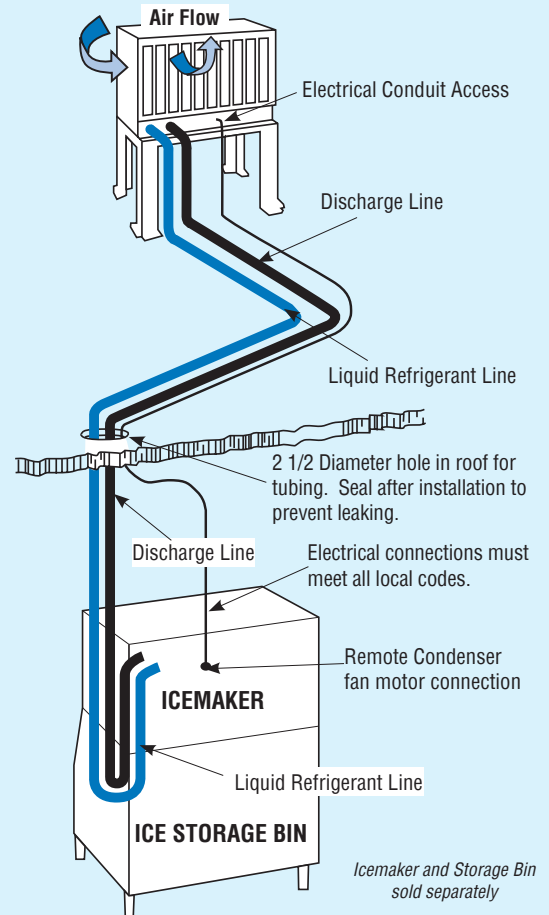

Electrical & Operating Limits

- 115V/60/1 (Connection to icemaker)
- Ambient Temp Range -20° - 122°F
- Voltage Range 104 - 127V

Ice Machines

URC-14KZ	F-1530MRK2Z(-C)(-SC)	Shipping Weight	Non-Precharged Line Sets BRAZING REQUIRED		
			25' Length	35' Length	55' Length
		100 Lbs.	HS-5604	HS-5605	HS-5606

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries

When used with F Series Flakers:

Three Year - Parts & Labor on entire unit.

Five Year - Parts on: air-cooled condenser coil.

Hoshizaki reserves the right to change specifications without notice.



If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle